

KGF COUPLING

Technical datasheet

APPLICATION

PEŠTAN KGF coupling for corrugated pipes is used for connection between concrete elements and piping system made of PEŠTAN corrugated pipes.




PRODUCT DESCRIPTION

PEŠTAN KGF coupling is made for PEŠTAN corrugated pipes connection with concrete chambers and it consist of a PP half-coupling where special glue with sand is applied to the outer side in order to achieve the best possible connection between the concrete chamber and the KGF coupling itself.

The connection of the corrugated pipeline with the coupling is realized through a sealing, the same connection as with other Peštans corrugated pipes.

PRODUCT AVAILABILITY


PEŠTAN KGF couplings are available in diameters from Ø200 to Ø800.

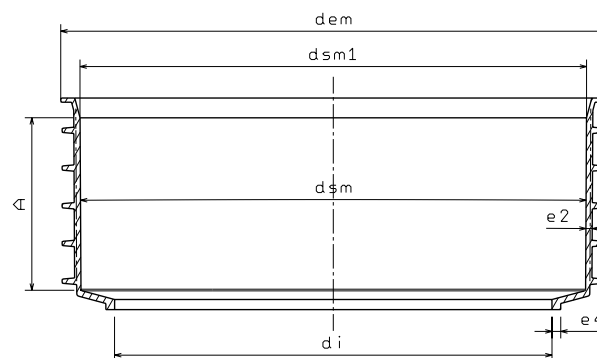

CODE	PRODUCT NAME	e2 _{min} (mm)	e4 _{min} (mm)	d e m (mm)	d s m 1 (mm)		d s m (mm)		d i _{min} (mm)	A _{min} (mm)
		min	min	max	min	max	min	max	min	min
19910705	KGF COUPLING Ø200	1.5	1.5	252.6	228	232	228	231	197.8	43
19910706	KGF COUPLING Ø250	1.8	1.8	314	284	287	284	286	246	59
19910700	KGF COUPLING Ø300	2	2	378	344	347	344	346	297	64
19910701	KGF COUPLING Ø400	2.5	2.5	499	459	463	459	462	398	74
19910702	KGF COUPLING Ø500	3	3	623	574	581	574	579	490	85
19910703	KGF COUPLING Ø600	3.5	3.5	746	684	693	684	691	588	96
19910704	KGF COUPLING Ø800	4.5	4.5	1006	909	917	906	914	788	118

Technical Assistance

Our technical and engineering team is supported and advised by European institutes. For more information about products please contact PEŠTAN technical support or regional salesman.

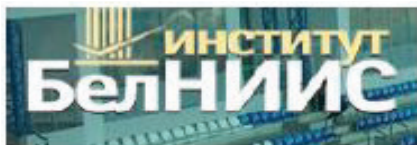

BELNIIS - Belarus



KIWA - Netherland



VUPS - Czech Republic



BELNIIS - Belarus



IMS - Serbia



GOST R - Russia



MPA - Germany



IGH - Croatia