



 **EVO**  
Line Glass White



## ELGW 300

Product code  
Glass: 13700070

## ELGW 450

Product code  
Glass: 13700071

## ELGW 550

Product code  
Glass: 13700072

## ELGW 650

Product code  
Glass: 13700073

## ELGW 750

Product code  
Glass: 13700074

## ELGW 850

Product code  
Glass: 13700075

## ELGW 950

Product code  
Glass: 13700076

## ELGW 1050

Product code  
Glass: 13700077

## ELGW 1150



Product code  
Glass: 13700078

## EVO Line Glass White

EVO Line Glass White is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm 1150mm sizes with chamfered edge grid made from White tempered glass. In this model you can chose 2 different base, depending are you gonna use it in renovation projects or in new building. Model with Ultra Low S base have 62mm installation height, 25mm water seal and DN 50 mm horizontal outlet and it is used mainly for renovation projects. Model with Standard base have 125mm installation height, 50mm water seal and DN 50 mm horizontal outlet and it is in accordance with EN 1253 and recommended to use in new building projects. Product consist "All you need set" so client have in box everything needed for the installation.




## EVO Line Glass White parts & specs



### Legend:

1. Height adjustment legs
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Bridges for leveling of ceramic
7. White glass grid



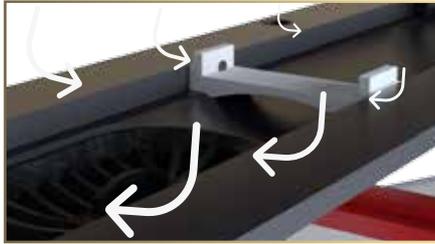


### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of ceramic

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 16mm up to 30mm of distance between the holder of the grid and the top of the grid.

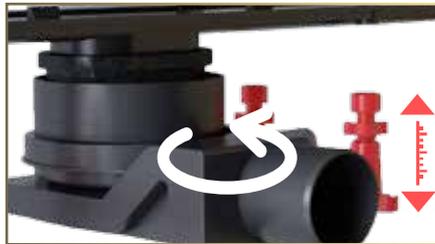

### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.




### 5 cm water seal set

As all of the Evolution shower drains are modular, the client can, by changing the Ultra low S base with this 2-part set, adjust all of our EVOLUTION LINE models to have 5 cm of water seal and in that way to be in accordance with EN 1253. Benefits of this model are: 15° rotatable adapter on the base, the adapter on the base is made from ABS so it can be connected both with push fit and solvent cement piping systems, the product is in accordance with EN 1253 and this makes it perfect for new building projects, the siphon can be cleaned very easily with simple pulling out of the cover of the siphon.



## EVO Line Glass White Technical

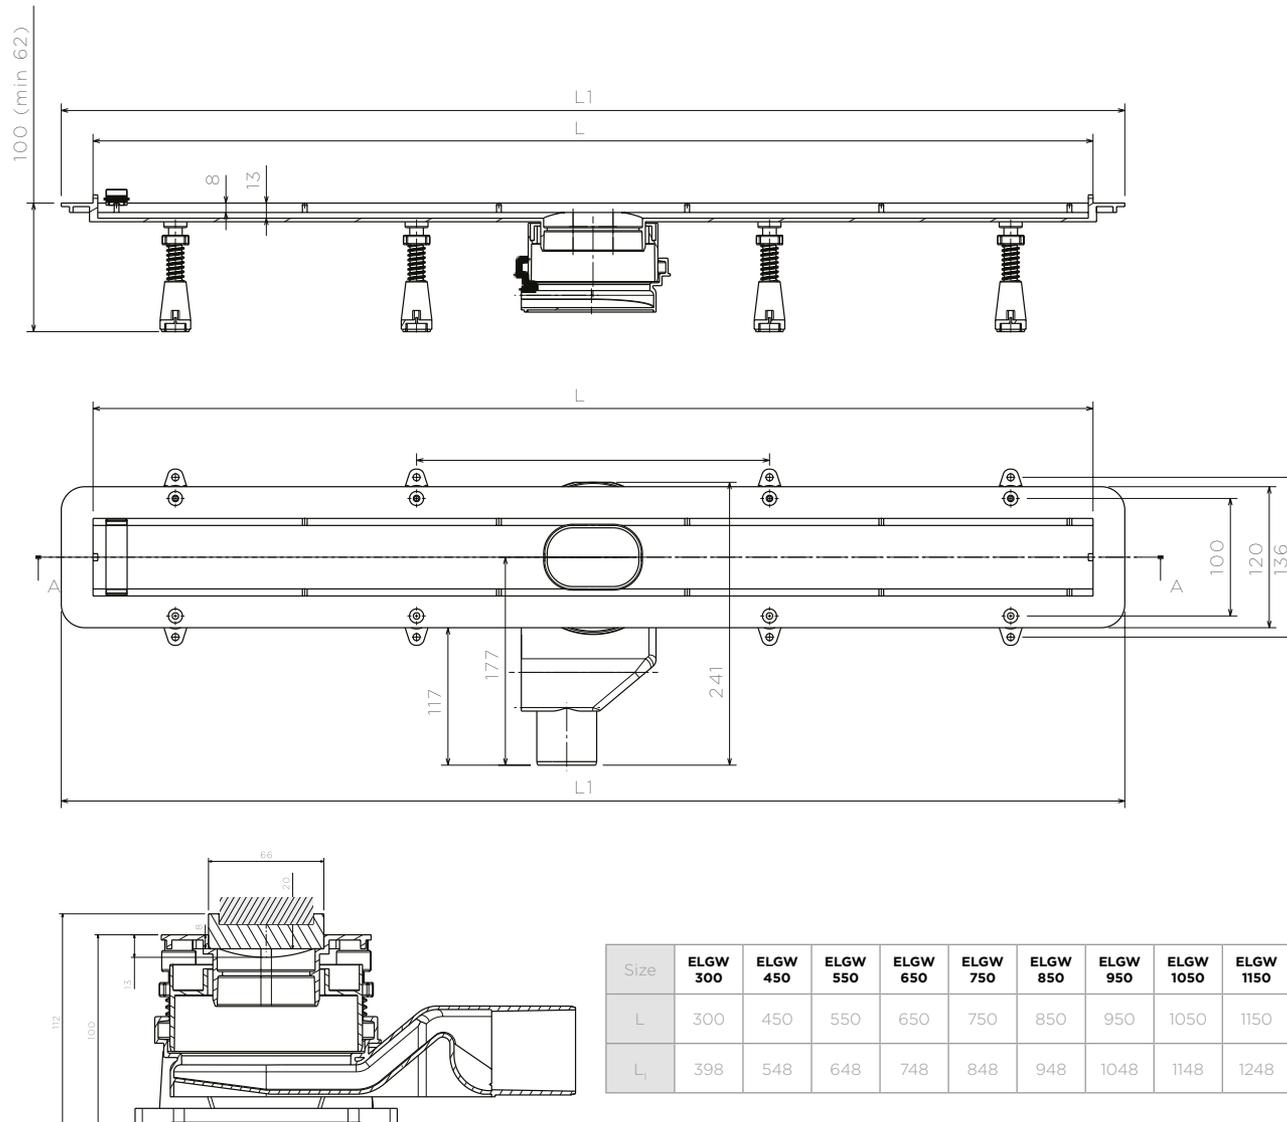

Size	ELGW 300	ELGW 450	ELGW 550	ELGW 650	ELGW 750	ELGW 850	ELGW 950	ELGW 1050	ELGW 1150
L	300	450	550	650	750	850	950	1050	1150
L <sub>1</sub>	398	548	648	748	848	948	1048	1148	1248

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds it way back to the drain. In complete with self - adhesive butyl tape comes with product and makes Anti Leaking System.

Uniquesolutionforlevelingofgridofdrain in dependence of thickness of chosen ceramic by choosing different bridges for leveling. From 16mm up to 30mm.

Universal solution for adjustment of installation height of drain and possibility of rotation of base for 360 degrees. Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO LINE shower drain have possibility of installation in both renovation and new building bathroom projects. Minimum installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Heigh adjustment legs enables extra security during instalation and use.

EVO LINE shower drain is manufactured in different sizes and is designed to satisfy most demanding customers regarding of their length. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm and 1050mm.