

EVOLUTION  
ELEGANCE COMES IN DETAILS





# ≡ EVO

## Introduction

Evolution line of shower drains represents the result of 5 years constant exploring and following of the latest trends in industry worldwide. It is a combination of highest technical requirements, unique design & innovations represented in every model. The Range consists of more than 110 different products divided in 3 groups EVO Ultra Thin, EVO Line and EVO Unlimited. Go into the world of Evolution shower drains and be part of the next generation of bathroom drainage. Evolution shower drains are manufactured by Pestan company, Serbia.

## Evo Icons

<p>1</p> 	<p>2</p> 	<p>3</p> 	<p>4</p> 
<p><b>Min. installation height</b></p> <p>Minimal construction height of drain, from bottom of base up to holder of grid.</p>	<p><b>Base diameter</b></p> <p>Diameter of horizontal base outlet.</p>	<p><b>Maximum flow rate</b></p> <p>Maximum flow rate with 20 cm threshold.</p>	<p><b>Unlimited design</b></p> <p>With set of parts who is coming in Unlimited box, client can make huge variety of shapes who fits almost any modern bathroom.</p>
<p>5</p> 	<p>6</p> 	<p>7</p> 	<p>8</p> 
<p><b>2 in 1 system</b></p> <p>Grid of drain can be turned and used both for stainless steel and ceramic finish.</p>	<p><b>Base rotation</b></p> <p>Base of drain can be rotated 360 degrees.</p>	<p><b>Guarantee</b></p> <p>10 years Guarantee.</p>	<p><b>Leveling of ceramic</b></p> <p>Model have system for leveling of ceramic from/to so client can have flexibility in choosing surface in bathroom.</p>
<p>9</p> 	<p>10</p> 	<p>11</p> 	<p>12</p> 
<p><b>Unltd leveling of ceramic</b></p> <p>Model have construction that allows installation of any surface so client have unlimited flexibility in choosing s urface in his bathroom.</p>	<p><b>Easy to clean</b></p> <p>Drain can be cleaned without removing grid so it makes it easy to clean.</p>	<p><b>ALS system</b></p> <p>Anti Leaking System represent combination of construction of drain and proper installation which allows all leaked and condensated water to go back to drain.</p>	<p><b>Unltd drain lenght</b></p> <p>Thanks to the universal solution lenght of drain can be adjusted to UNLIMITED lenght. Numbers describe distance between holder of grid and top of the grid, without adhesive for ceramic and hydro isolation.</p>
<p>13</p> 	<p>14</p> <p><b>AISI 304</b></p>	<p>15</p> <p><b>K3</b></p>	<p>16</p> 
<p><b>Unlimited flow rate</b></p> <p>With combination of appropriate parts, model can have unlimited flow rate because you can put as much as you need bases.</p>	<p><b>Material of grid</b></p> <p>Grid is made from stainless steel AISI 304. Optionally we can produce grid from stainless steel AISI 316.</p>	<p><b>Load class of grid</b></p> <p>Grid is classified as K3 which means that it can withstand 300 kg of pressure.</p>	<p><b>Water seal height</b></p> <p>Model is having siphonic S base with 25mm water seal. On model can be installed both 25mm and 50mm water seal bases.</p>

## Evo Ultra Thin

EVO Ultra Thin is linear shower drain from Evolution line of products. It consist of 36 different products divided in 3 groups: Line, Square and Wave represented in 6 different sizes and packed with complete set for hydroisolation and protective plastic who have dual role. "Ultra Thin" is characterized by massive designer piece grid made from stainless steel, big variety of models, set for levelling of ceramic, anti leaking system, 360 degrees rotatable base, low installation height and high flow rate.



## Evo Line


EVO Line is linear shower drain from Evolution line of products. It consist 118 different products divided in 3 groups: Chrome, Glass and Invisible represented in 8 different sizes, 2 different base and packed with complete set for hydroisolation and protective styrofoam who have dual role. "Line" is characterized by designer piece grid with perfect edges, big variety of models, set for levelling of ceramic, anti leaking system, modularity, 2 different 360 degrees rotatable base, adjustable installation height and high flow rate.



## Evo Unlimited

EVO Unlimited is a linear shower drain from Evolution line of products and represents a innovation in the world of shower drains. Inspiration for this model was minimalistic design & unlimited flexibility which puts ceramic in first plan. It consist multiple pieces with who you can put any requirement of your bathroom and it is packed with complete set for hydroisolation and protective plastic who have dual role. "Unlimited" is characterized by unlimited & minimalistic design, unlimited height of ceramic, unlimited flow rate, unlimited length, anti-leaking system, 360 degrees rotatable base and low installation height.







EVO

Ultra Thin

## ≡ EVO Ultra Thin Models

### EVO Ultra Thin Line

EVO Ultra Thin Line is available in 650mm, 750mm, 850mm, 950mm, 1050mm & 1150mm sizes with design piece "Line" grid made from AISI 304 stainless steel. Grid also have K3 load class and set for levelling of ceramic. Minimum installation height is 77mm and maximum flow rate is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him "Easy 2 Clean" and consist "All you need set" so clients have in box everything needed for the installation.



### EVO Ultra Thin Square

EVO Ultra Thin Square is available in 650mm, 750mm, 850mm, 950mm, 1050mm & 1150mm sizes with design piece "Square" grid made from AISI 304 stainless steel. Grid also have K3 load class and set for levelling of ceramic. Minimum installation height is 77mm and maximum flow rate is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him "Easy 2 Clean" and consist "All you need set" so client have in box everything needed for the installation.



### EVO Ultra Thin Wave

EVO Ultra Thin Wave is available in 650mm, 750mm, 850mm, 950mm, 1050mm & 1150mm sizes with design piece "Wave" grid made from AISI 304 stainless steel. Grid also have K3 load class and set for levelling of ceramic. Minimum installation height is 77mm and maximum flow rate is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him "Easy 2 Clean" and consist "All you need set" so client have in box everything needed for the installation.









 **EVO**  
Ultra Thin Line



### **EUTL 650**

Product code  
Chrome: 13700000  
Gold: 13700010

### **EUTL 750**

Product code  
Chrome: 13700001  
Gold: 13700011

### **EUTL 850**

Product code  
Chrome: 13700002  
Gold: 13700012

### **EUTL 950**

Product code  
Chrome: 13700003  
Gold: 13700013

### **EUTL 1050**


Product code  
Chrome: 13700004  
Gold: 13700014

### **EUTL 1150**


Product code  
Chrome: 13700005  
Gold: 13700015

## EVO Ultra Thin Line

EVO Ultra Thin Line is available in 650mm, 750mm, 850mm, 950mm, 1050mm & 1150mm sizes with design piece "Line" grid made from AISI 304 stainless steel. Grid also have K3 load class and set for levelling of ceramic. Minimum installation height is 77mm and maximum flow rate is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him "Easy 2 Clean" and consist "All you need set" so clients have in box everything needed for the installation. Model is available with 24 carat gold finish grid.

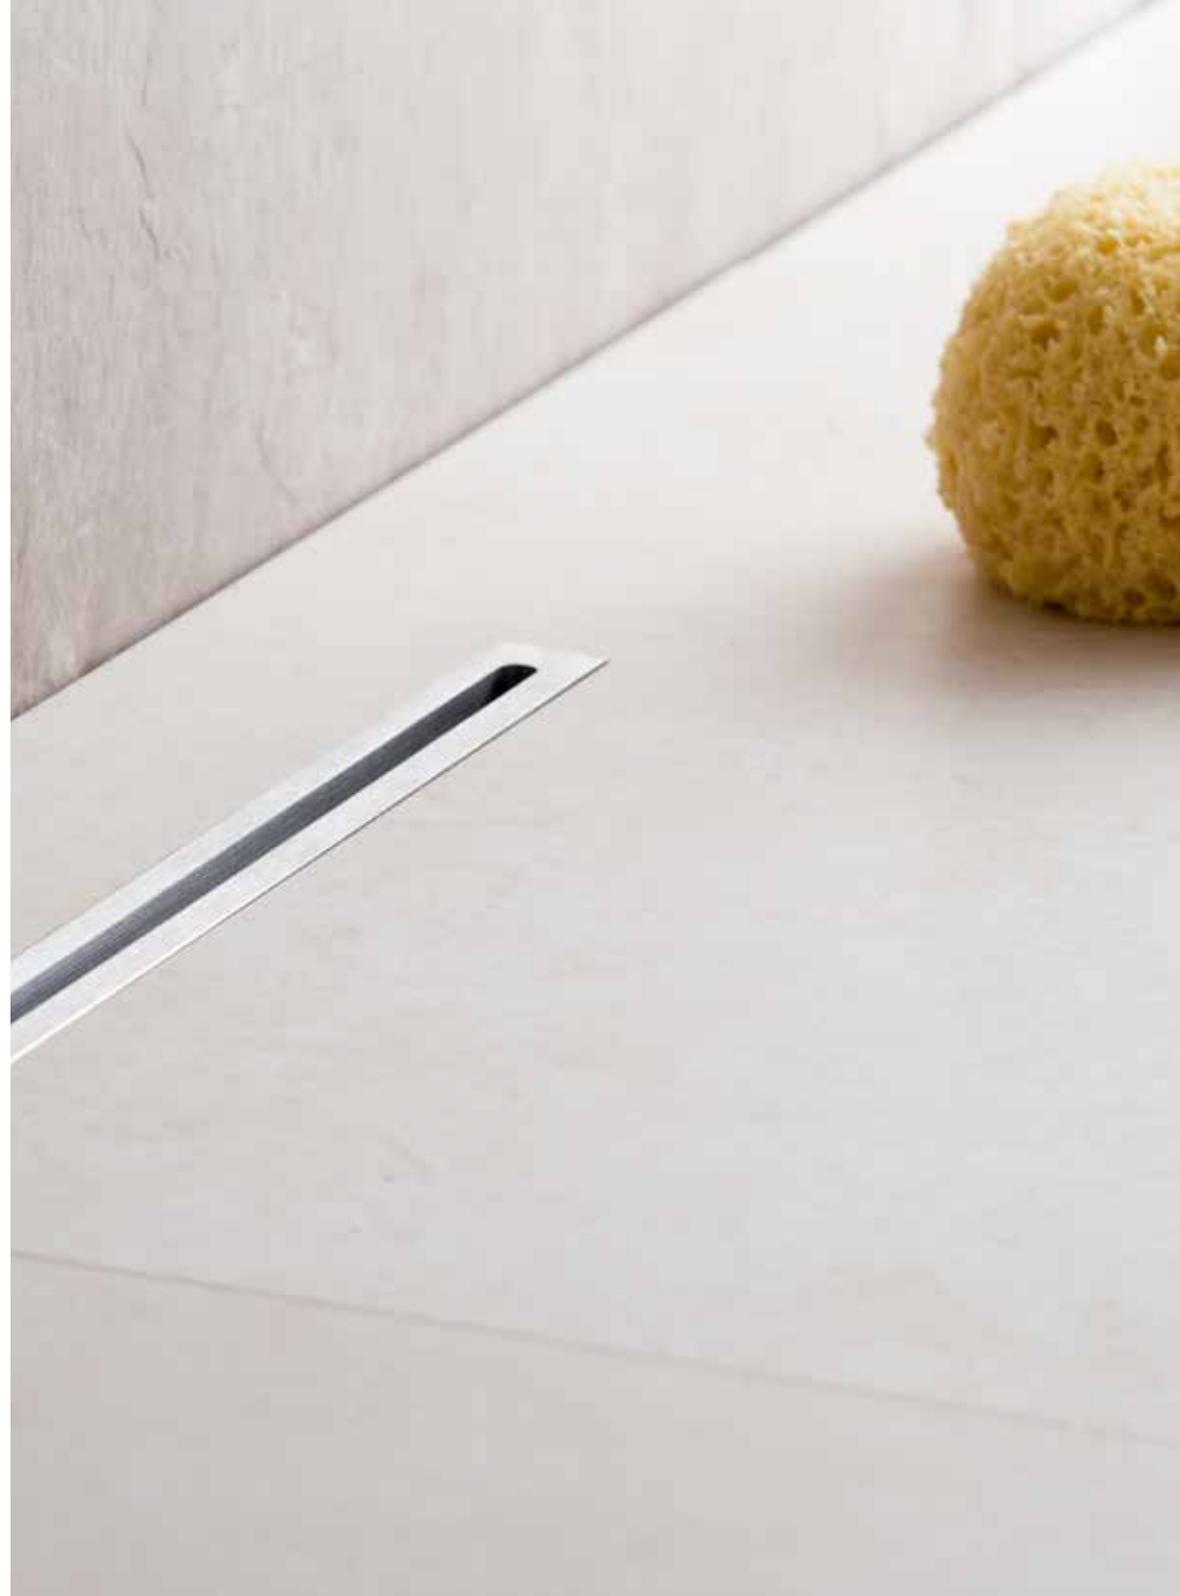

## EVO Ultra Thin Line parts & specs

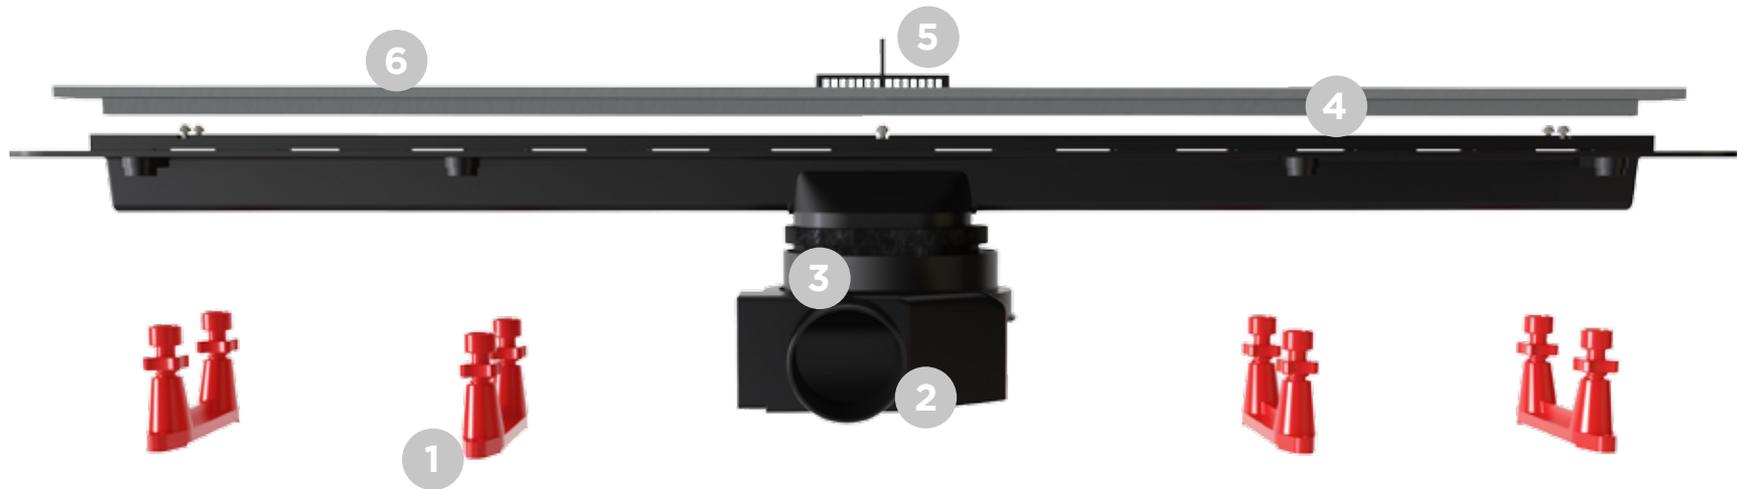

77 mm	Ø50 mm	E2C	K3
48 L/min	360°	ALS	25mm
10 Years	14mm-20mm	AISI 304	

### Variants of grid finishing:


Brushed Chrome  
24k Gold plated

### Legend:

1. Height adjustment legs.
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Stainless steel "Line" grid




## EVO Ultra Thin Line main advantages

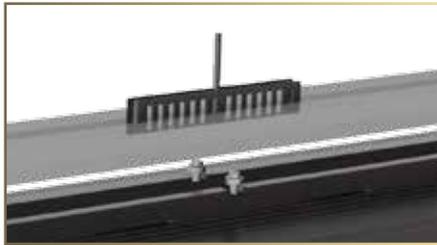

### Easy To Clean

Easy cleaning of drain without removing stainless steel grid.

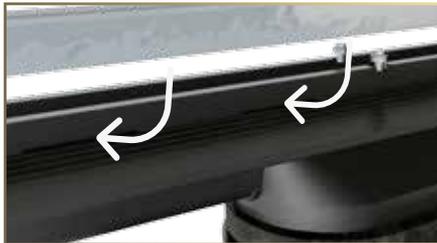

### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of grid

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 14mm up to 20mm of distance between the holder of the grid and the top of the grid.




### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.



## EVO Ultra Thin Line Technical

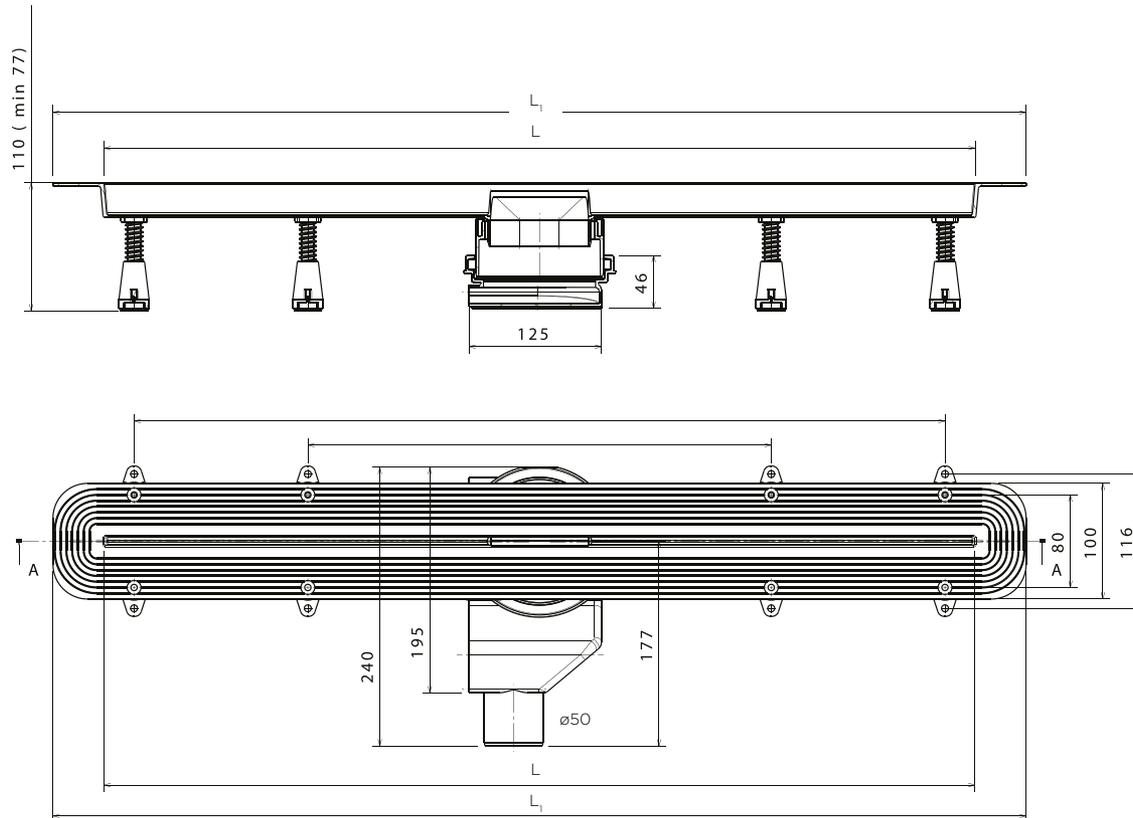

Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO ULTRA THIN shower drain have possibility of installation in both renovation and new building bathroom projects. Minimal installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Height adjustment legs enables extra security during installation and use.

EVO ULTRA THIN shower drain is manufactured in different sizes. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm, 1050mm and 1150mm.

Size	EUTL 650	EUTL 750	EUTL 850	EUTL 950	EUTL 1050	EUTL 1150
L	650	750	850	950	1050	1150
L <sub>1</sub>	748	848	948	1048	1148	1248





EVO

Ultra thin Square



### EUTS 650

Product code  
Chrome: 13700030  
Gold: 13700040

### EUTS 750

Product code  
Chrome: 13700031  
Gold: 13700041

### EUTS 850

Product code  
Chrome: 13700032  
Gold: 13700042

### EUTS 950

Product code  
Chrome: 13700033  
Gold: 13700043

### EUTS 1050

Product code  
Chrome: 13700034  
Gold: 13700044

### EUTS 1150


Product code  
Chrome: 13700035  
Gold: 13700045

## EVO Ultra Thin Square

EVO Ultra Thin Square is available in 650mm, 750mm, 850mm, 950mm, 1050mm & 1150mm sizes with design piece "Square" grid made from AISI 304 stainless steel. Grid also have K3 load class and set for levelling of ceramic. Minimum installation height is 77mm and maximum flow rate is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him "Easy 2 Clean" and consist "All you need set" so client have in box everything needed for the installation. Model is available with 24 carat gold finish grid.



## EVO Ultra Thin Square parts & specs

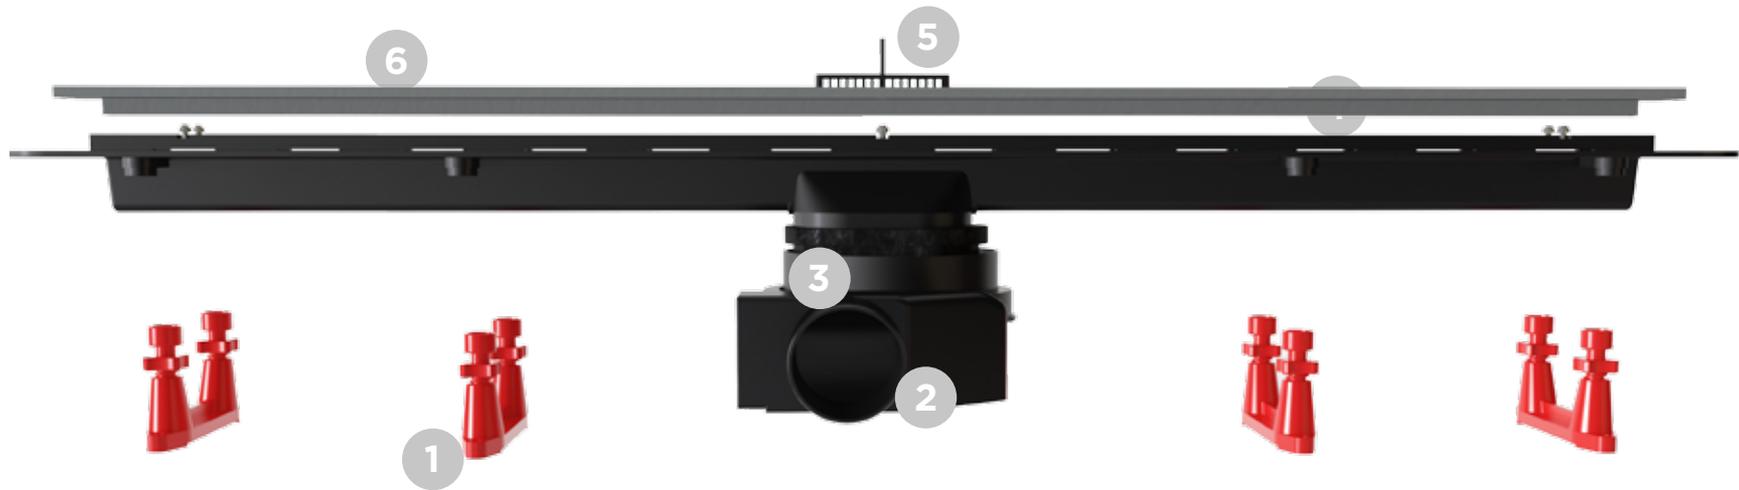

 77 mm	 $\text{Ø}50$ mm	 E2C	K3
 48 L/min	 360°	 ALS	 25mm
 10 Years	 14mm-20mm	AISI 304	

### Variants of grid finishing:


Brushed Chrome  
24k Gold plated

### Legend:

1. Height adjustment legs.
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Stainless steel "Square" grid




## EVO Ultra Thin Square main advantages

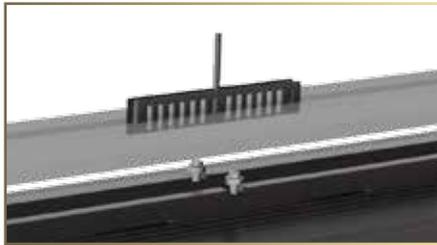

### Easy To Clean

Easy cleaning of drain without removing stainless steel grid.

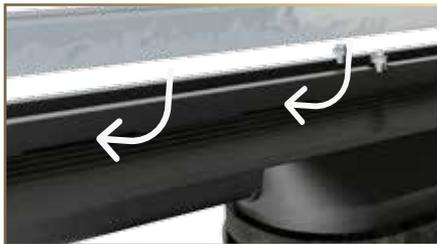

### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of grid

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 14mm up to 20mm of distance between the holder of the grid and the top of the grid.




### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.



## EVO Ultra Thin Square Technical

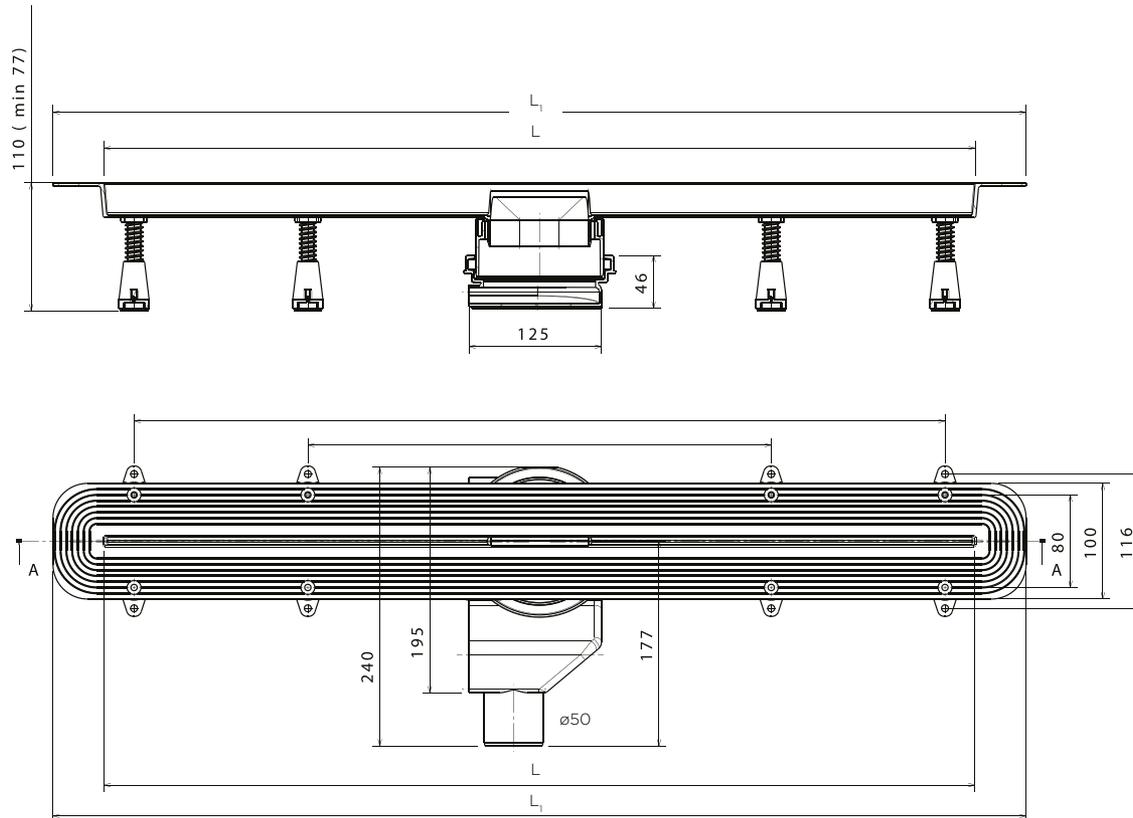

Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO ULTRA THIN shower drain have possibility of installation in both renovation and new building bathroom projects. Minimal installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Height adjustment legs enables extra security during installation and use.

EVO ULTRA THIN shower drain is manufactured in different sizes. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm, 1050mm and 1150mm.

Size	EUTS 650	EUTS 750	EUTS 850	EUTS 950	EUTS 1050	EUTS 1150
L	650	750	850	950	1050	1150
L <sub>1</sub>	748	848	948	1048	1148	1248





 **EVO**  
Ultra thin Wave



### EUTW 650

Product code  
Chrome: 13700050  
Gold: 13700060

### EUTW 750

Product code  
Chrome: 13700051  
Gold: 13700061

### EUTW 850

Product code  
Chrome: 13700052  
Gold: 13700062

### EUTW 950

Product code  
Chrome: 13700053  
Gold: 13700063

### EUTW 1050

Product code  
Chrome: 13700054  
Gold: 13700064

### EUTW 1150


Product code  
Chrome: 13700055  
Gold: 13700065

## EVO Ultra Thin Wave

EVO Ultra Thin Wave is available in 650mm, 750mm, 850mm, 950mm, 1050mm & 1150mm sizes with design piece “Wave” grid made from AISI 304 stainless steel. Grid also have K3 load class and set for levelling of ceramic. Minimum installation height is 77mm and maximum flow rate is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him “Easy 2 Clean” and consist “All you need set” so client have in box everything needed for the installation. Model is available with 24 carat gold finish grid.



## EVO Ultra Thin Wave parts & specs

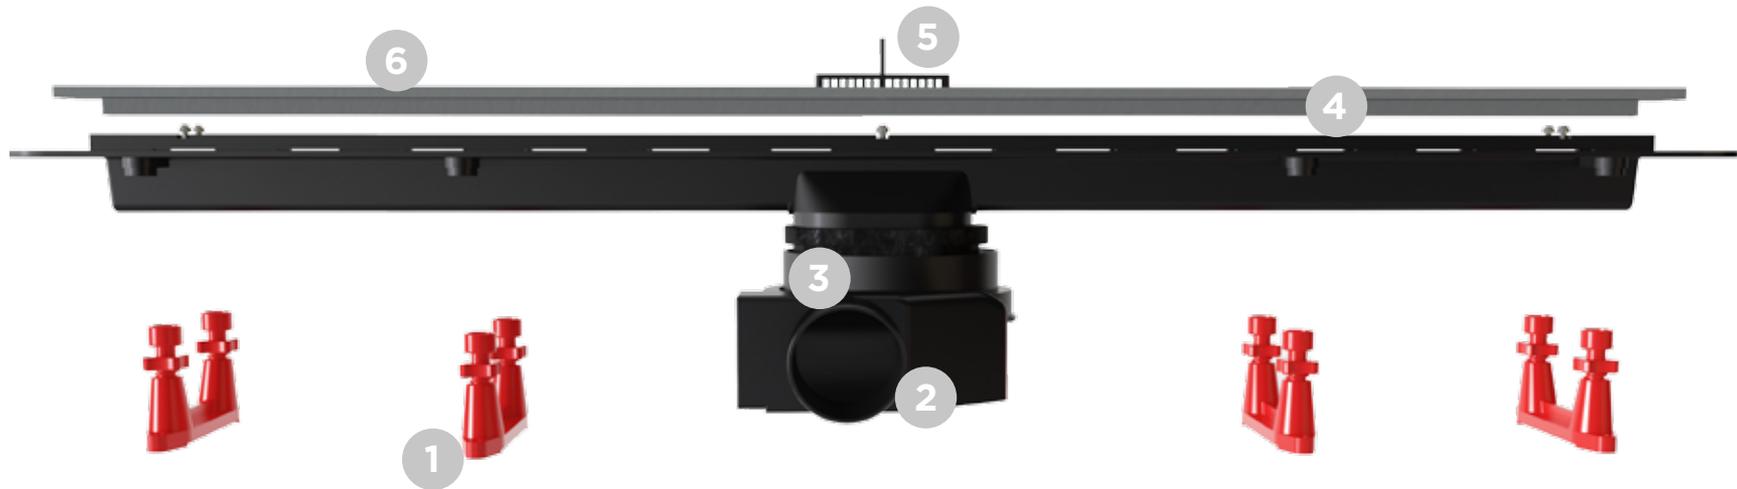

77 mm	$\text{Ø}50$ mm	E2C	K3
48 L/min	360°	ALS	25mm
10 Years	14mm-20mm	AISI 304	

### Variants of grid finishing:


Brushed Chrome  
24k Gold plated

### Legend:

1. Height adjustment legs.
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Stainless steel "Wave" grid




## EVO Ultra Thin Wave main advantages

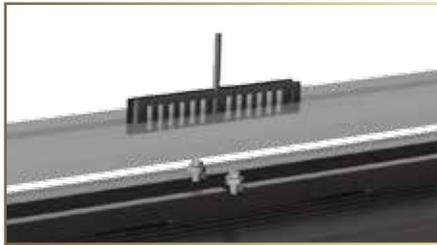

### Easy To Clean

Easy cleaning of drain without removing stainless steel grid.

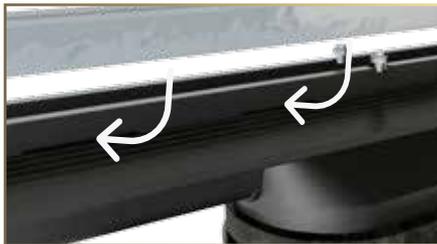

### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of grid

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 14mm up to 20mm of distance between the holder of the grid and the top of the grid.




### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.




## EVO Ultra Thin Wave Technical

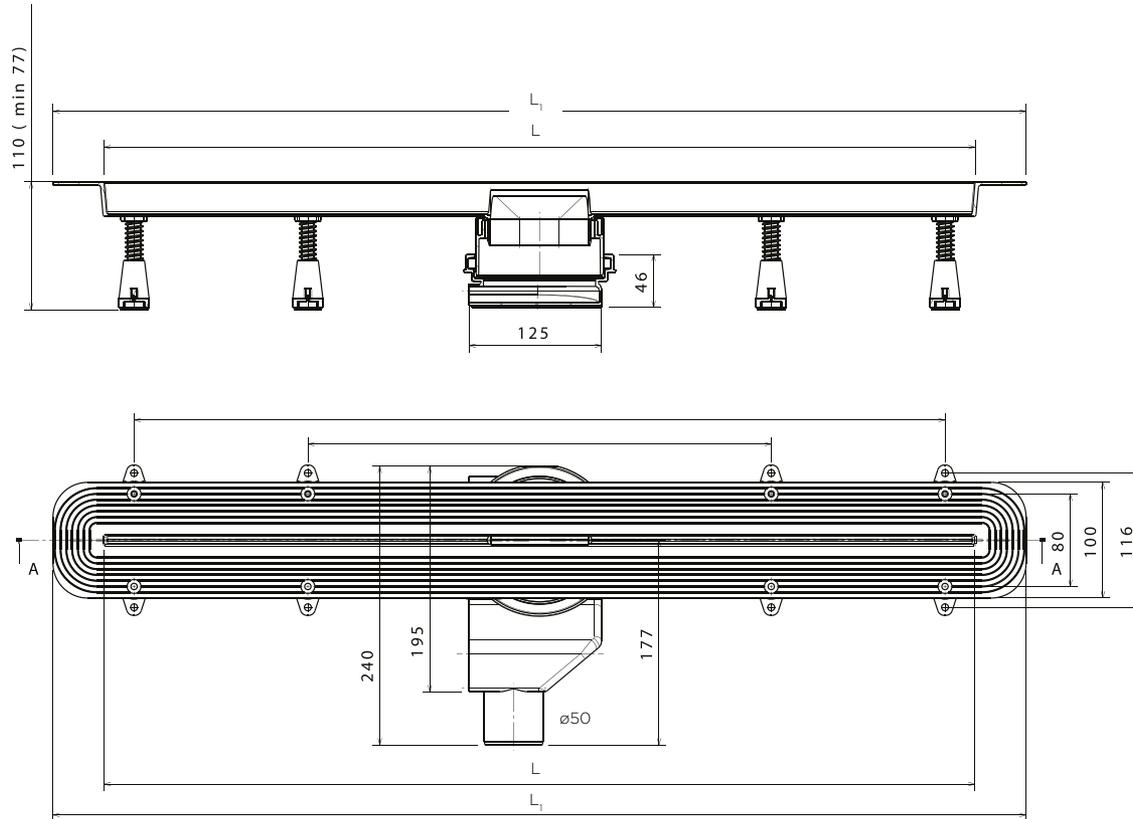

Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO ULTRA THIN shower drain have possibility of installation in both renovation and new building bathroom projects. Minimal installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Height adjustment legs enables extra security during installation and use.

EVO ULTRA THIN shower drain is manufactured in different sizes. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm, 1050mm and 1150mm.

Size	EUTW 650	EUTW 750	EUTW 850	EUTW 950	EUTW 1050	EUTW 1150
L	650	750	850	950	1050	1150
L <sub>1</sub>	748	848	948	1048	1148	1248





EVO  
Line

## ≡ EVO Line Models

### EVO Line Glass White

EVO Line Glass White is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm, 1150mm sizes with chamfered edge grid made from White tempered glass. In this model you can chose 2 different

base, depending are you gonna use it in renovation projects or in new building. Product consist "All you need set" so client have in box everything needed for the installation.

### EVO Line Glass Black

EVO Line Glass Black is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm, 1150mm sizes with chamfered edge grid made from Black tempered glass. In this model you can chose 2 different base, depending are you gonna use it in renovation projects or in new building. Product consist "All you need set" so client have in box everything needed for the installation.

### EVO Line Invisible

EVO LINE Invisible is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm, 1150mm sizes with stainless steel holder of ceramic who provides invisibility of shower drain, unlimited leveling of ceramic and has K3 load class. In this model you can chose 2 different base, depending are you gonna use it in renovation projects or in new building. Model consist "All you need set" so client have in box everything needed for the installation.

### EVO Line Chrome

EVO LINE Chrome is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm, 1150mm sizes with perfect final touch 2 in 1 grid made from AISI 304 stainless steel and K3 load class. In this model you can chose 2 different base, depending are you gonna use it in renovation projects or in new building. Model consist "All you need set" so client have in box everything needed for the installation and it is available also with 24k gold finish grid.









 **EVO**  
Line Glass White



## ELGW 300

Product code  
Glass: 13700070

## ELGW 450

Product code  
Glass: 13700071

## ELGW 550

Product code  
Glass: 13700072

## ELGW 650

Product code  
Glass: 13700073

## ELGW 750

Product code  
Glass: 13700074

## ELGW 850

Product code  
Glass: 13700075

## ELGW 950

Product code  
Glass: 13700076

## ELGW 1050

Product code  
Glass: 13700077

## ELGW 1150



Product code  
Glass: 13700078

## EVO Line Glass White

EVO Line Glass White is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm, 1150mm sizes with chamfered edge grid made from White tempered glass. In this model you can chose 2 different base, depending are you gonna use it in renovation projects or in new building. Model with Ultra Low S base have 62mm installation height, 25mm water seal and DN 50 mm horizontal outlet and it is used mainly for renovation projects. Model with Standard base have 125mm installation height, 50mm water seal and DN 50 mm horizontal outlet and it is in accordance with EN 1253 and recommended to use in new building projects. Product consist "All you need set" so client have in box everything needed for the installation.




## EVO Line Glass White parts & specs



### Legend:

1. Height adjustment legs
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Bridges for leveling of ceramic
7. White glass grid



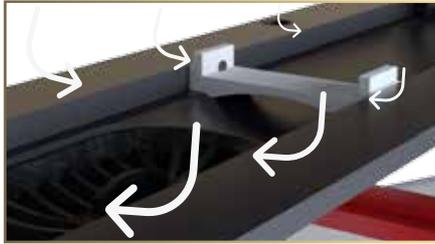


### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of ceramic

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 16mm up to 30mm of distance between the holder of the grid and the top of the grid.

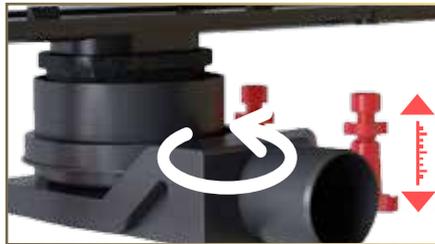

### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.




### 5 cm water seal set

As all of the Evolution shower drains are modular, the client can, by changing the Ultra low S base with this 2-part set, adjust all of our EVOLUTION LINE models to have 5 cm of water seal and in that way to be in accordance with EN 1253. Benefits of this model are: 15° rotatable adapter on the base. The adapter on the base is made from ABS so it can be connected both with push fit and solvent cement piping systems. The product is in accordance with EN 1253 and this makes it perfect for new building projects. The siphon can be cleaned very easily with simple pulling out of the cover of the siphon.



## EVO Line Glass White Technical

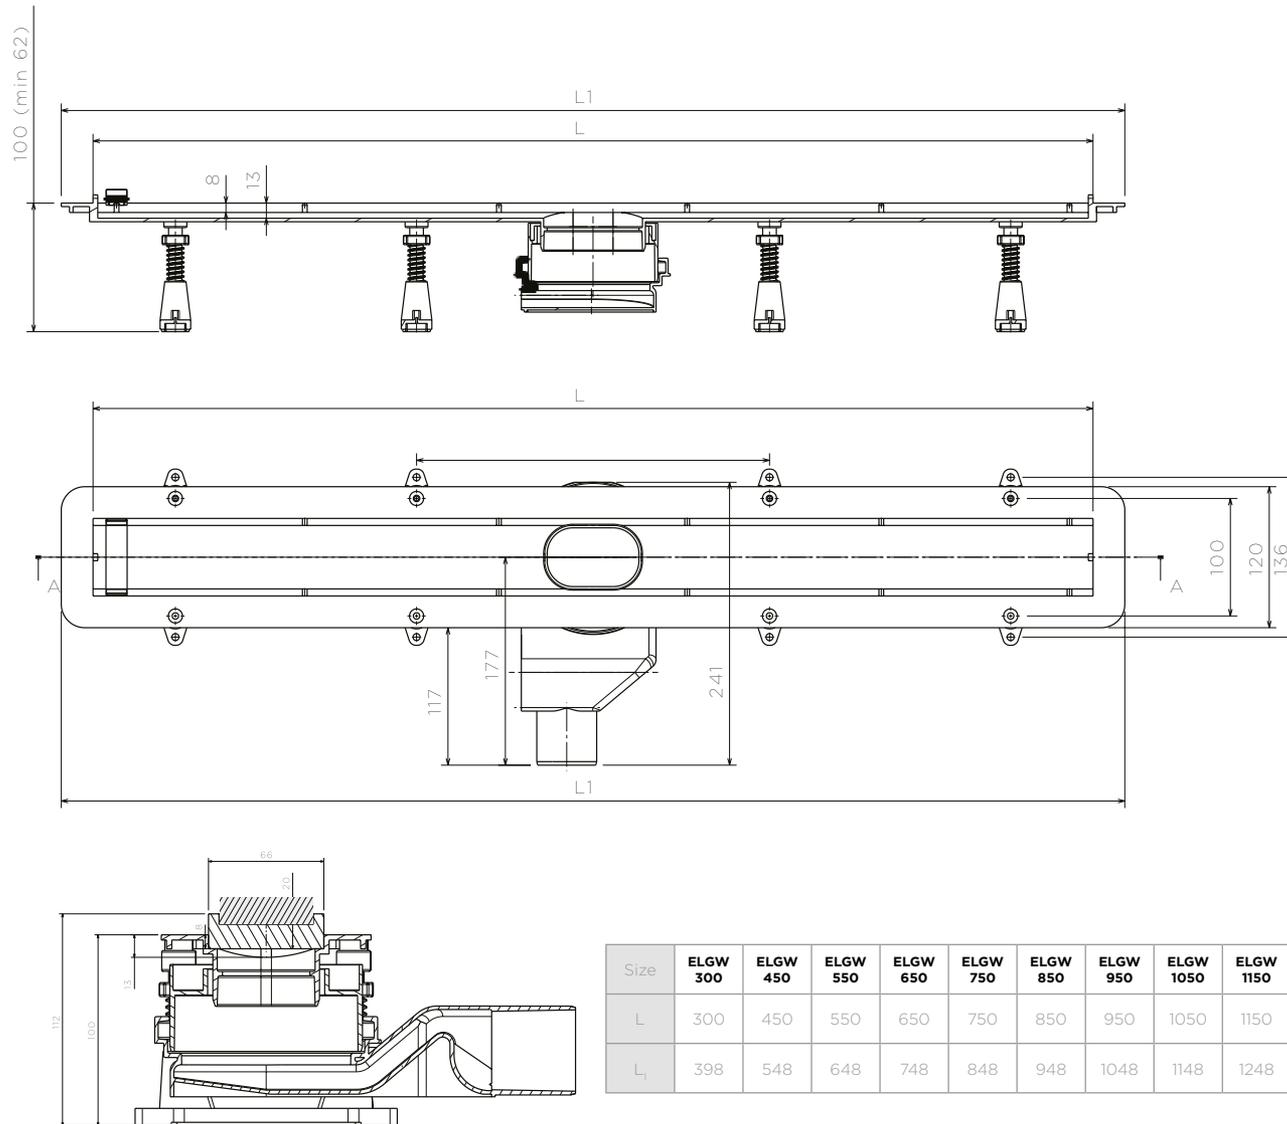

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds it way back to the drain. In complete with self - adhesive butyl tape comes with product and makes Anti Leaking System.

Uniquesolutionforlevelingofgridofdrain in dependence of thickness of chosen ceramic by choosing different bridges for leveling. From 16mm up to 30mm.

Universal solution for adjustment of installation height of drain and possibility of rotation of base for 360 degrees. Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO LINE shower drain have possibility of installation in both renovation and new building bathroom projects. Minimum installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Heigh adjustment legs enables extra security during instalation and use.

EVO LINE shower drain is manufactured in different sizes and is designed to satisfy most demanding customers regarding of their length. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm and 1050mm.





 EVO  
Line Glass Black



## ELGB 300

Product code  
13700090

## ELGB 450

Product code  
13700091

## ELGB 550

Product code  
13700092

## ELGB 650

Product code  
13700093

## ELGB 750

Product code  
13700094

## ELGB 850

Product code  
13700095

## ELGB 950

Product code  
13700096

## ELGB 1050

Product code  
13700097

## ELGB 1150

Product code  
13700098

## EVO Line Glass Black

EVO LINE Invisible is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm 1150mm sizes with stainless steel holder of ceramic who provides invisibility of shower drain, unlimited leveling of ceramic and has K3 load class. In this model you can chose 2 different base, depending are you gonna use it in rennovation projects or in new building. Model with Ultra Low S base have 62mm installation height, 25mm water seal and DN 50 mm horizontal outlet and it is used mainly for rennovation projects. Model with Standard base have 125mm installation height, 50mm water seal and DN 50 mm horizontal outlet and it is in accordance with EN 1253 and recomended to use in new building projects. Model consist "All you need set" so client have in box everything needed for the installation.



## EVO Line Glass Black parts & specs




<b>RENOVATION</b> 62mm 25mm	<b>NEW BUILDING</b> 125mm 50mm	<b>ALS</b> 	<b>K3</b>
48 L/min	360°	16mm-30mm	<b>Ø50 mm</b>
10 Years			

### LEGEND:

1. Height adjustment legs
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Bridges for leveling of ceramic
7. Black Glass grid



## EVO Line Glass Black main advantages

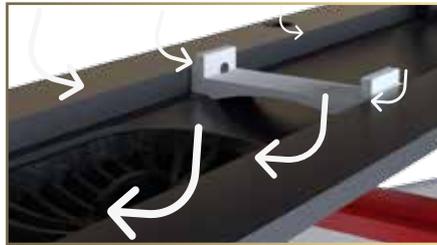


### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of ceramic

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 16mm up to 30mm of distance between the holder of the grid and the top of the grid.

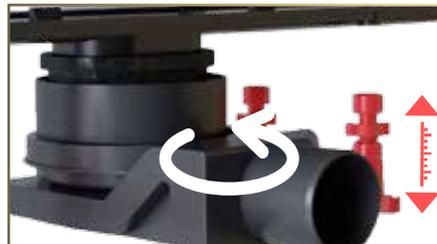

### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.




### 5 cm water seal set

As all of the Evolution shower drains are modular, the client can, by changing the Ultra low S base with this 2-part set, adjust all of our EVOLUTION LINE models to have 5 cm of water seal and in that way to be in accordance with EN 1253. Benefits of this model are: 15° rotatable adapter on the base, the adapter on the base is made from ABS so it can be connected both with push fit and solvent cement piping systems, the product is in accordance with EN 1253 and this makes it perfect for new building projects, the siphon can be cleaned very easily with simple pulling out of the cover of the siphon.



## EVO Line Glass Black Technical

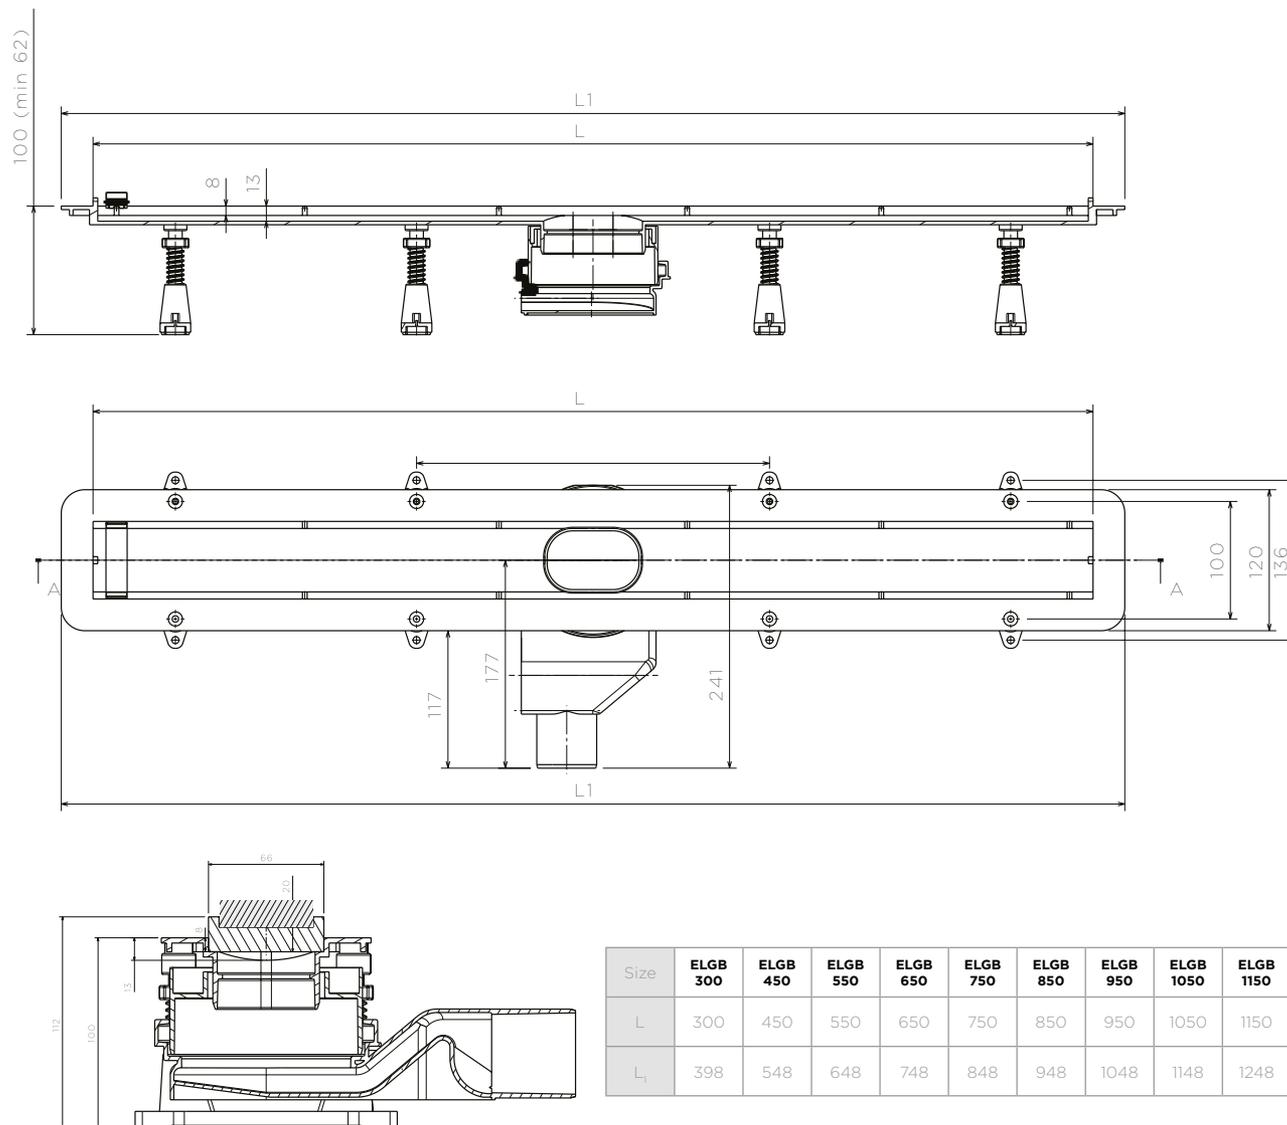

Size	ELGB 300	ELGB 450	ELGB 550	ELGB 650	ELGB 750	ELGB 850	ELGB 950	ELGB 1050	ELGB 1150
L	300	450	550	650	750	850	950	1050	1150
L <sub>1</sub>	398	548	648	748	848	948	1048	1148	1248

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds it way back to the drain. In complete with self - adhesive butyl tape comes with product and makes Anti Leaking System.

Uniquesolutionforlevelingofgridofdrain in dependence of thickness of chosen ceramic by choosing different bridges for leveling. From 16mm up to 30mm.

Universal solution for adjustment of installation height of drain and possibility of rotation of base for 360 degrees. Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO LINE shower drain have possibility of installation in both renovation and new building bathroom projects. Minimum installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Heigh adjustment legs enables extra security during instalation and use.

EVO LINE shower drain is manufactured in different sizes and is designed to satisfy most demanding customers regarding of their length. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm and 1050mm.





 EVO  
Line Invisible



## ELIN 300

Product code:  
13700120

## ELIN 450

Product code:  
13700121

## ELIN 550

Product code:  
13700122

## ELIN 650

Product code:  
13700123

## ELIN 750

Product code:  
13700124

## ELIN 850

Product code:  
13700125

## ELIN 950

Product code:  
13700126

## ELIN 1050

Product code:  
13700127

## ELIN 1150



Product code:  
13700128

## EVO Line Invisible

EVO LINE Invisible is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm 1150mm sizes with stainless steel holder of ceramic who provides invisibility of shower drain, unlimited leveling of ceramic and has K3 load class. In this model you can chose 2 different base, depending are you gonna use it in rennovation projects or in new building. Model with Ultra Low S base have 62mm installation heigh, 25mm water seal and DN 50 mm horizontal outlet and it is used mainly for rennovation projects. Model with Standard base have 125mm installation height, 50mm water seal and DN 50 mm horizontal outlet and it is in accordance with EN 1253 and recomended to use in new building projects. Model consist "All you need set" so client have in box everything needed for the installation.




## EVO Line Invisible parts & specs



### LEGEND:

1. Height adjustment legs
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Bridges for leveling of ceramic
7. Ceramic



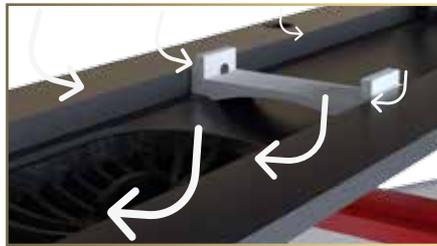


### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.



### Leveling of ceramic

Model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 16mm up to 30mm of distance between the holder of the grid and the top of the grid.

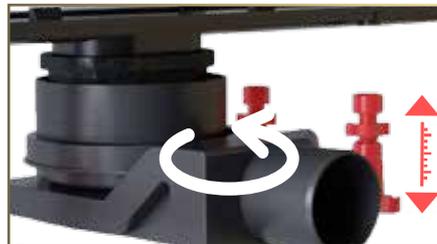

### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.




### 5 cm water seal set

As all of the Evolution shower drains are modular, the client can, by changing the Ultra low S base with this 2-part set, adjust all of our EVOLUTION LINE models to have 5 cm of water seal and in that way to be in accordance with EN 1253. Benefits of this model are: 15° rotatable adapter on the base, the adapter on the base is made from ABS so it can be connected both with push fit and solvent cement piping systems, the product is in accordance with EN 1253 and this makes it perfect for new building projects, the siphon can be cleaned very easily with simple pulling out of the cover of the siphon.



## EVO Line Invisible Technical

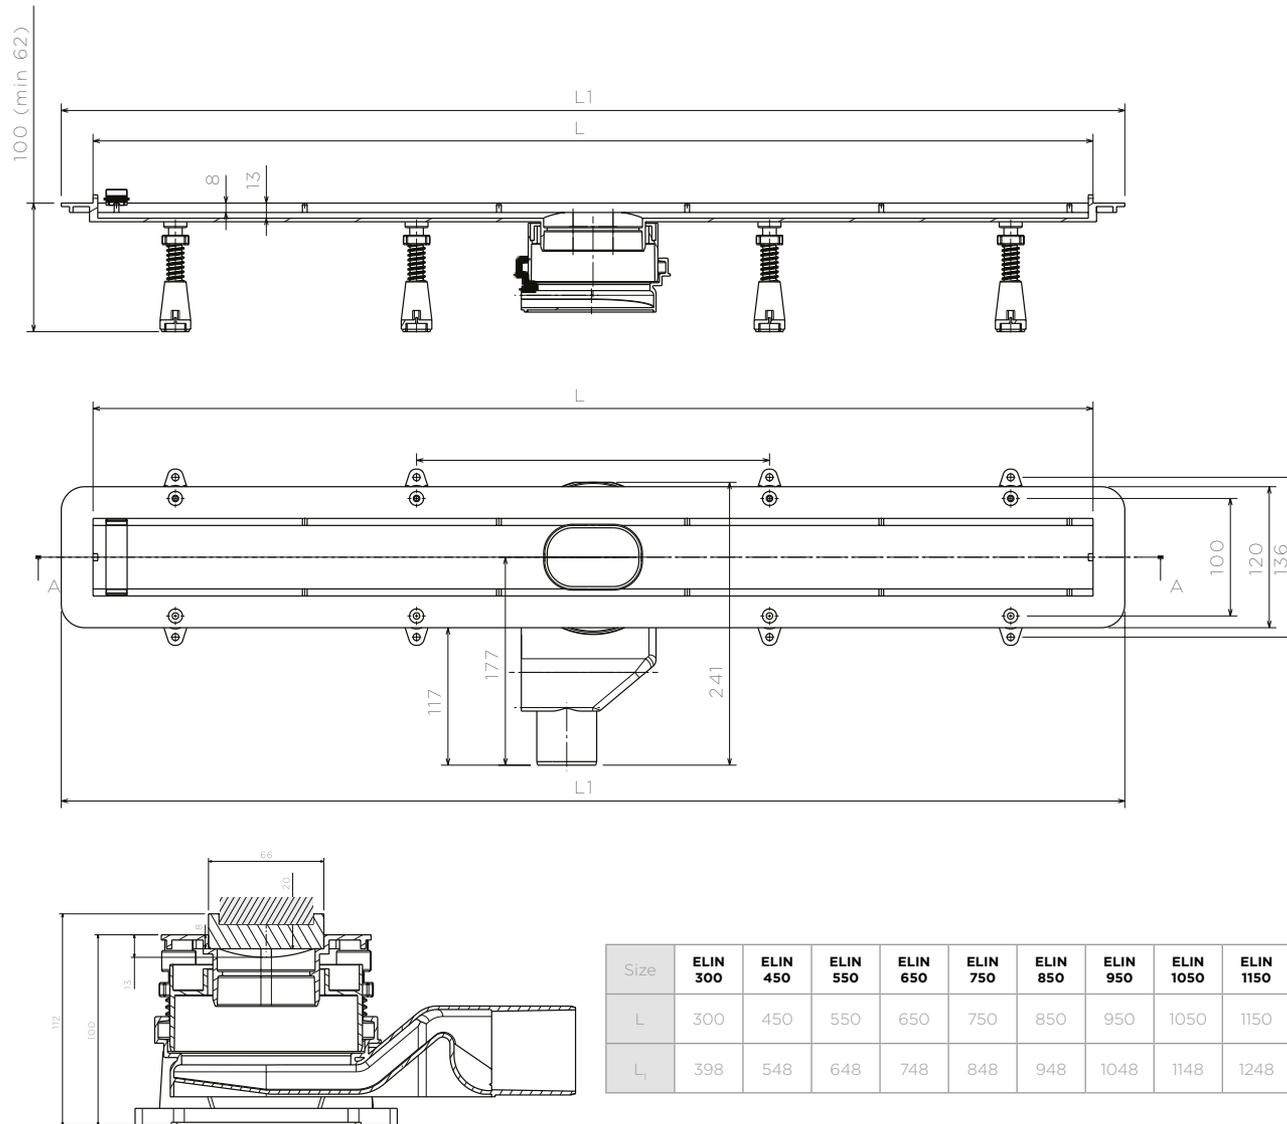

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds it way back to the drain. In complete with self - adhesive butyl tape comes with product and makes Anti Leaking System.

Uniquesolutionforlevelingofgridofdrain in dependence of thickness of chosen ceramic by choosing different bridges for leveling. From 16mm up to 30mm.

Universal solution for adjustment of installation height of drain and possibility of rotation of base for 360 degrees. Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO LINE shower drain have possibility of installation in both renovation and new building bathroom projects. Minimum installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Heigh adjustment legs enables extra security during instalation and use.

EVO LINE shower drain is manufactured in different sizes and is designed to satisfy most demanding customers regarding of their length. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm and 1050mm.





 **EVO**  
Line Chrome

## ELCH 300

Product code:  
Chrome: 13700140  
Gold: 13700110

## ELCH 450

Product code:  
Chrome: 13700141  
Gold: 13700111

## ELCH 550

Product code:  
Chrome: 13700142  
Gold: 13700112

## ELCH 650

Product code:  
Chrome: 13700143  
Gold: 13700113

## ELCH 750

Product code:  
Chrome: 13700144  
Gold: 13700114

## ELCH 850

Product code:  
Chrome: 13700145  
Gold: 13700115

## ELCH 950

Product code:  
Chrome: 13700146  
Gold: 13700116

## ELCH 1050

Product code:  
Chrome: 13700147  
Gold: 13700117

## ELCH 1150

Product code:  
Chrome: 13700148  
Gold: 13700118

## EVO Line Chrome


EVO LINE Chrome is available in 300mm, 450mm, 550mm, 650mm, 750mm, 850mm, 950mm, 1050mm 1150mm sizes with perfect final touch 2 in 1 grid made from AISI 304 stainless steel and K3 load class. In this model you can chose 2 different base, depending are you gonna use it in renovation projects or in new building. Model with Ultra Low S base have 62mm installation heigh, 25mm water seal and DN 50 mm horizontal outlet and it is used mainly for renovation projects. Model with Standard base have 125mm installation height, 50mm water seal and DN 50 mm horizontal outlet and it is in accordance with EN 1253 and recomended to use in new building projects. Model consist "All you need set" so client have in box everything needed for the installation and it is available also with 24k gold finish grid.





## EVO Line Chrome parts & specs



### RENOVATION



### NEW BUILDING



### Variants of grid finishing:


Brushed Chrome  
24k Gold plated

### LEGEND:

1. Height adjustment legs
2. Ultra low S Base
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Bridges for leveling of ceramic
7. Chrome



## EVO Line Chrome main advantages

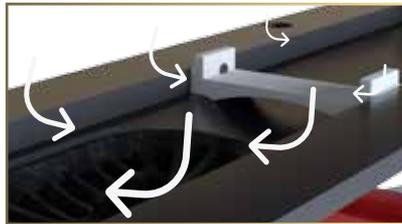

### Anti Leaking System

Thanks to new design of holder of grid, all condensed and leaked water under the tile finds its way back to the drain. In complete with self-adhesive butyl tape which comes with the product represents the Anti Leak System.




### Leveling of ceramic

The model has a system for grid leveling so the client can have flexibility in choosing the surface in the bathroom. Adjusting is performed by tightening and loosening of leveling screws in the grid carrier. The grid can be leveled from 16mm up to 30mm of distance between the holder of the grid and the top of the grid.



### Adjustment of drain height and base position

Universal solution for adjustment of installation height of the drain and possibility of rotation of the base for 360 degrees.

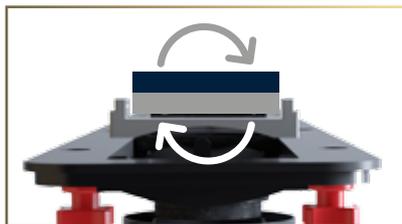

### 2 in 1 System

The grid of the drain can be turned and used both for stainless steel and ceramic finishes.




### 5 cm water seal set

As all of the Evolution shower drains are modular, the client can, by changing the Ultra low S base with this 2-part adapter, adjust all of our EVOLUTION LINE models to have 5 cm of water seal and in that way to be in accordance with EN 1253. Benefits of this model are: 15° rotatable adapter on the base. The adapter on the base is made from ABS so it can be connected both with push fit and solvent cement piping systems. The product is in accordance with EN 1253 and this makes it perfect for new building projects. The siphon can be cleaned very easily with simple pulling out of the cover of the siphon.



## EVO Line Glass Black Techincal

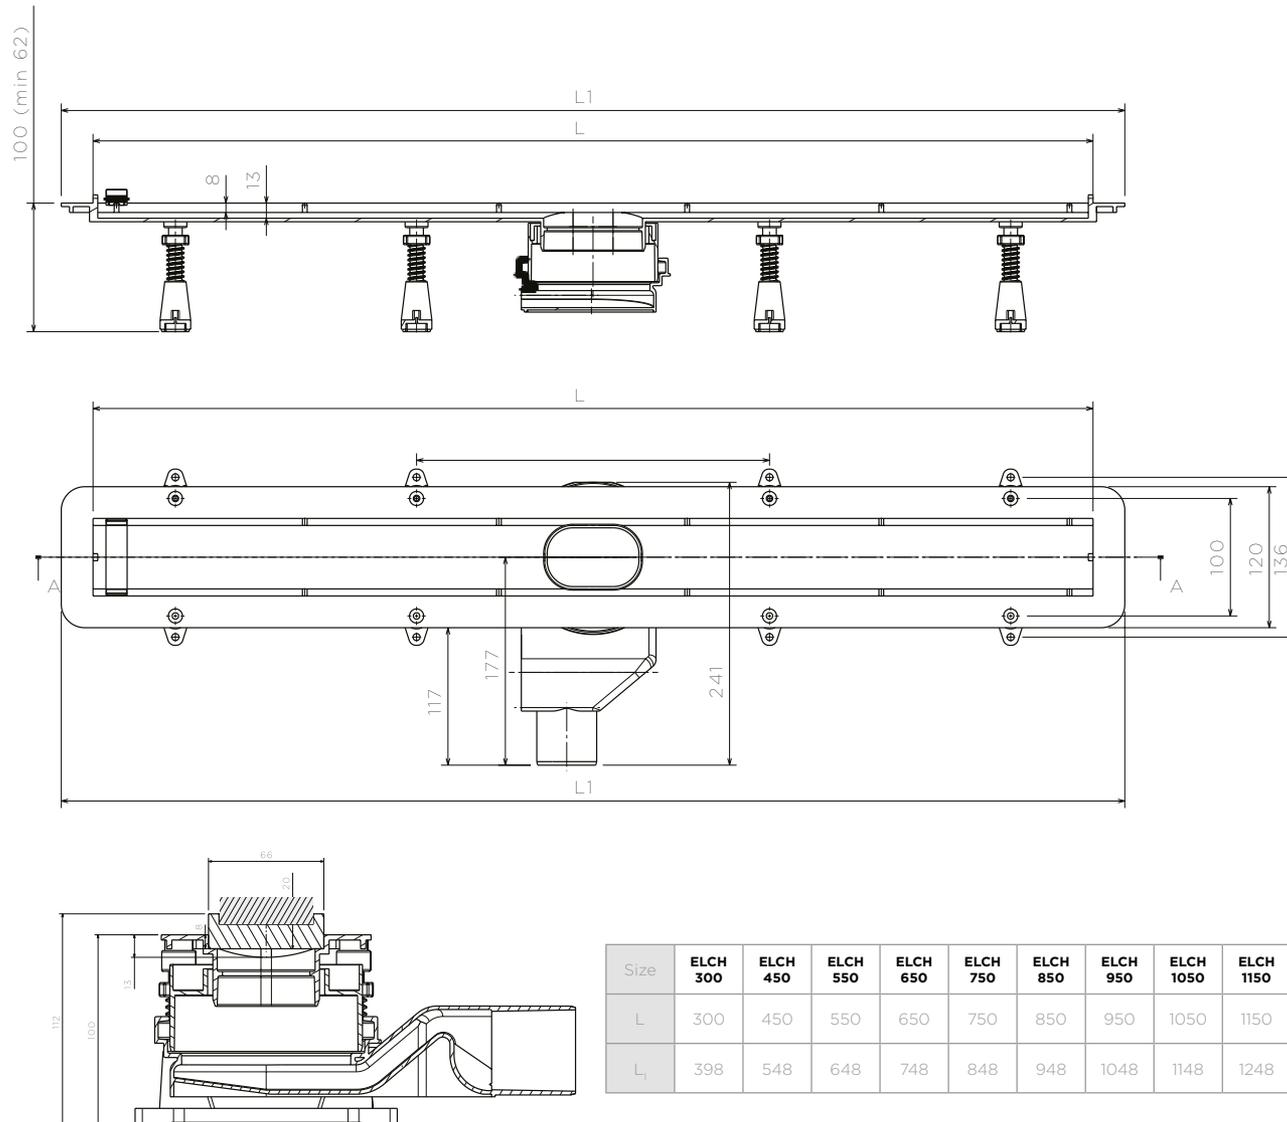

Size	ELCH 300	ELCH 450	ELCH 550	ELCH 650	ELCH 750	ELCH 850	ELCH 950	ELCH 1050	ELCH 1150
L	300	450	550	650	750	850	950	1050	1150
L <sub>1</sub>	398	548	648	748	848	948	1048	1148	1248


Thanks to new design of holder of grid, all condensed and leaked water under the tile finds it way back to the drain. In complete with self - adhesive butyl tape comes with product and makes Anti Leaking System.

Uniquesolutionforlevelingofgridofdrain in dependence of thickness of chosen ceramic by choosing different bridges for leveling. From 16mm up to 30mm.

Universal solution for adjustment of installation height of drain and possibility of rotation of base for 360 degrees. Thanks to universal solution for adjustment height of drain (DN 110mm cuttable reducer) EVO LINE shower drain have possibility of installation in both renovation and new building bathroom projects. Minimum installation height is 77mm and maximum is 110mm which fulfills all requests of modern buildings. Heigh adjustment legs enables extra security during instalation and use.

EVO LINE shower drain is manufactured in different sizes and is designed to satisfy most demanding customers regarding of their length. In dependence of your needs we offer following sizes: 650mm, 750mm, 850mm, 950mm and 1050mm.





EVO  
Unlimited

  
**EUNLTD**

Set  
13700160

**EUNLTD**

Set Light  
13700161

## EVO Unlimited

EVO Unlimited is a linear shower drain from Evolution line of products and represents a innovation in the world of shower drains. Inspiration for this model was minimalistic design and unlimited flexibility which puts ceramic in first plan. It consist multiple pieces with who you can fulfill any requirement of your bathroom and it is packed with complete set for hydro isolation and protective plastic who have dual role. "Unlimited" is characterized by unlimited & minimalistic design, unlimited height of ceramic, unlimited flow rate, unlimited length, anti-leaking system, 360 degrees rotatable base and low installation height. Minimum installation height is 77mm and maximum flow rate per base is 48 l/min which is provided by ultra low 360 degrees rotatable base with 25mm water seal height and output DN 50mm. Model can be cleaned without removing grid so it makes him "Easy 2 Clean" and consist "All you need set" so client have in box everything needed for the installation. In dependence of your needs in EVO UNLIMITED set you can find the ideal solution for your bathroom.



## EVO Unlimited parts & specs



### LEGEND:

1. Height adjustment legs
2. Ultra low S Base
3. Reducer with rubber ring
4. Grid holder with vertical output
5. Grid holder without vertical output
6. Grid for hair
7. Straight connector
8. Corner connector
9. End of drain

77 mm	Ø50 mm	Unltd	360°
10 Years	Unltd	E2C	↓
Unltd	25mm	Unltd	



**Holder of the grid with vertical output**




**Holder of the grid without vertical output**



**Corner connector**



**End of drain**

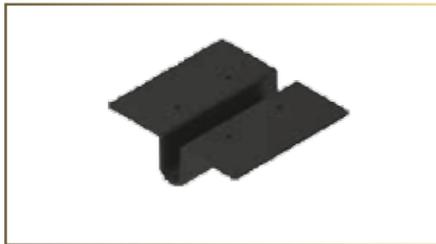

**Straight connector**




**Rubber ring**




**Reducer of drain**



**Ultra Low S base**

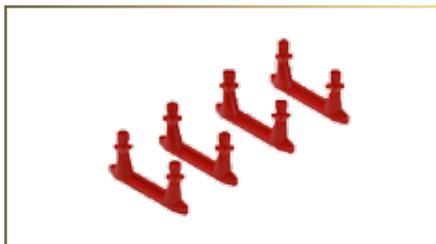

**Height adjustment legs**

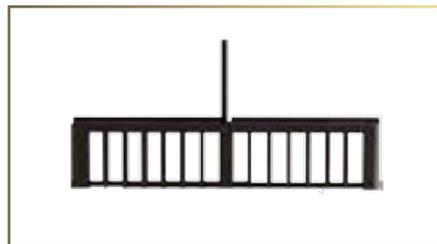



**Grid for hair**




**Screws**




**Special adhesive for bonding parts of drains**

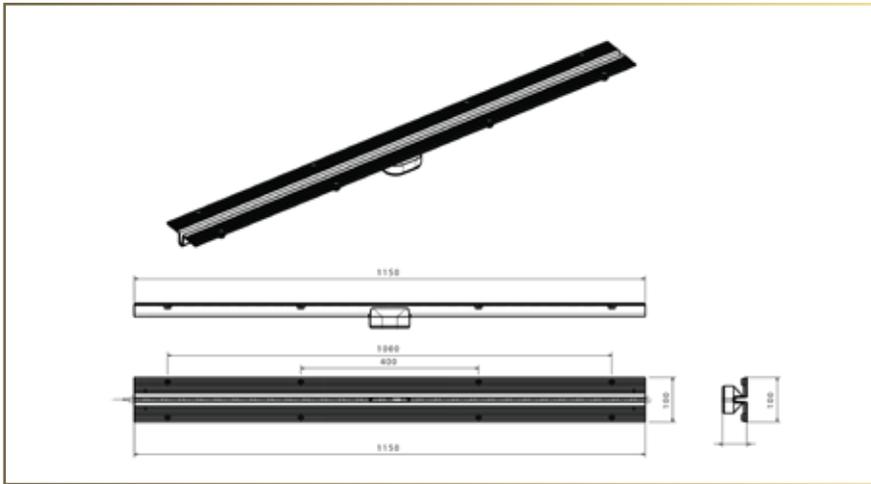


**Holder of the grid with vertical output**

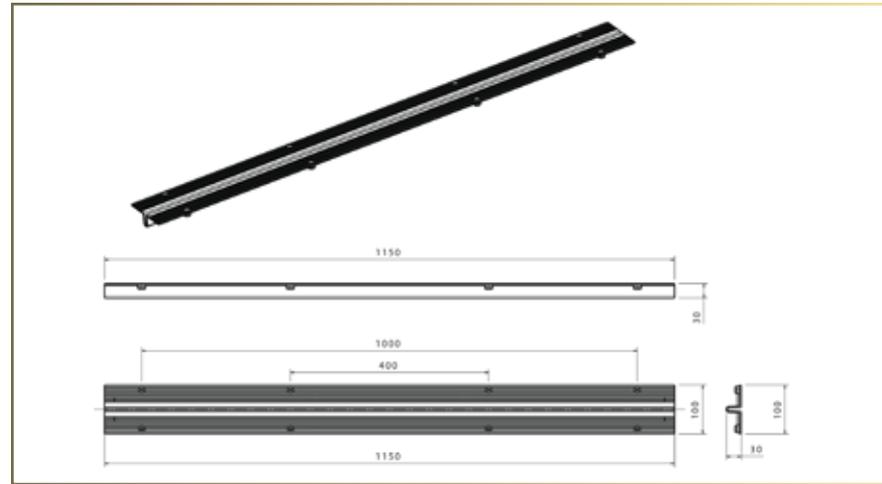


**Holder of the grid without vertical output**

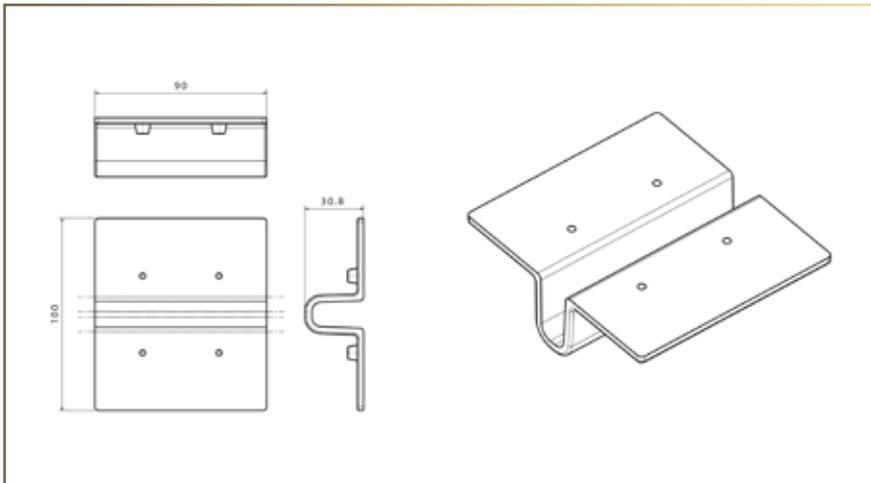


**Straight connector**

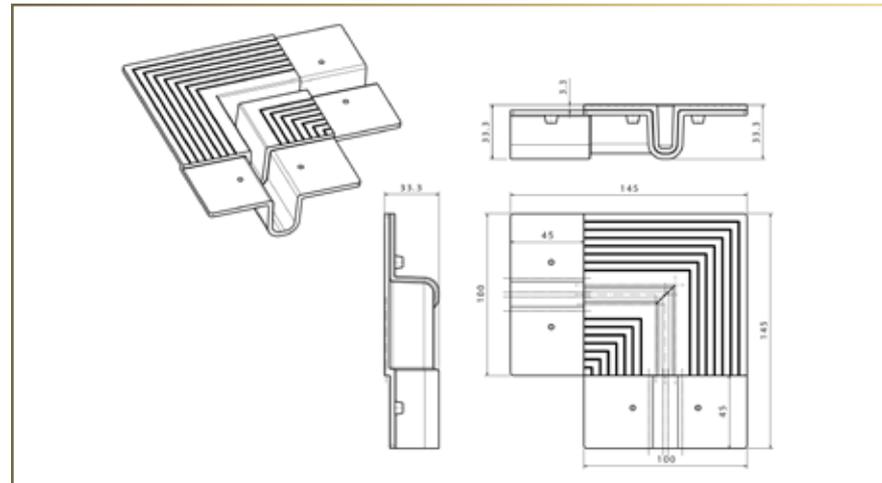


**Corner connector**

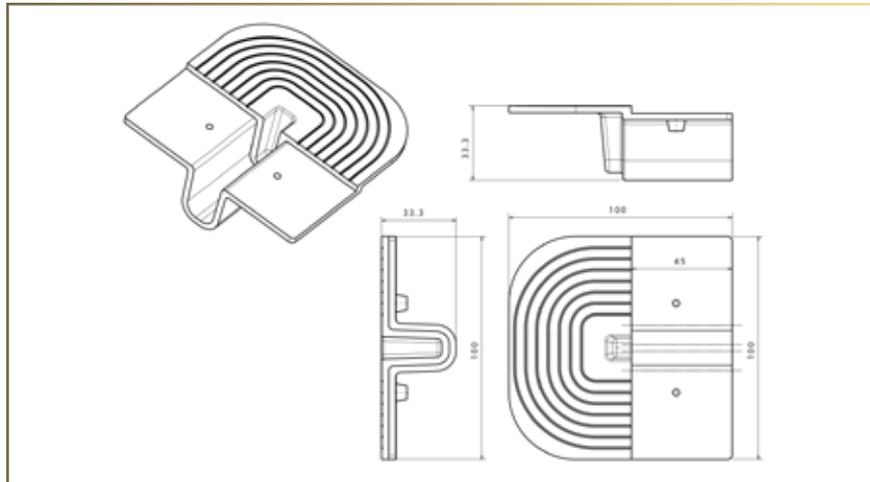


End of drain

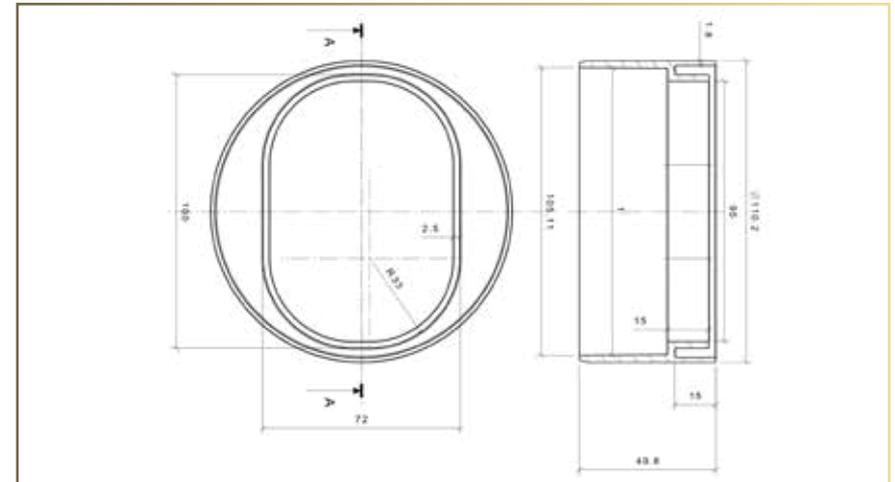

Rubber ring

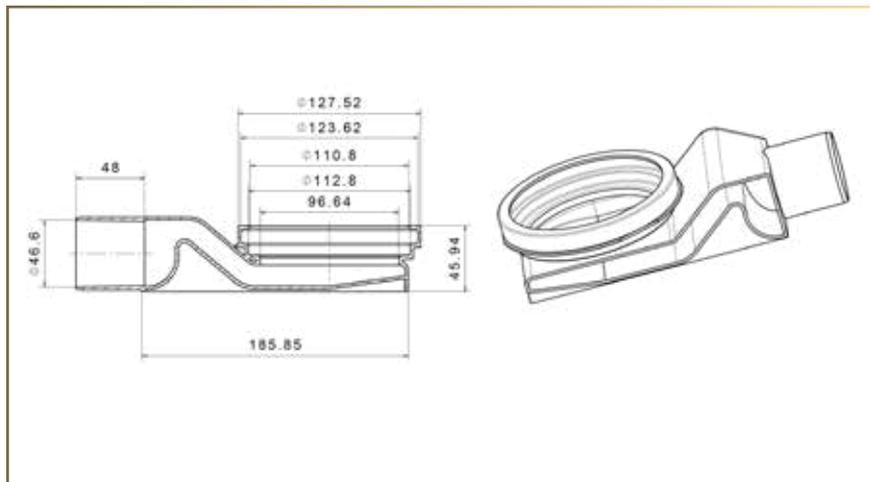

Base of drain

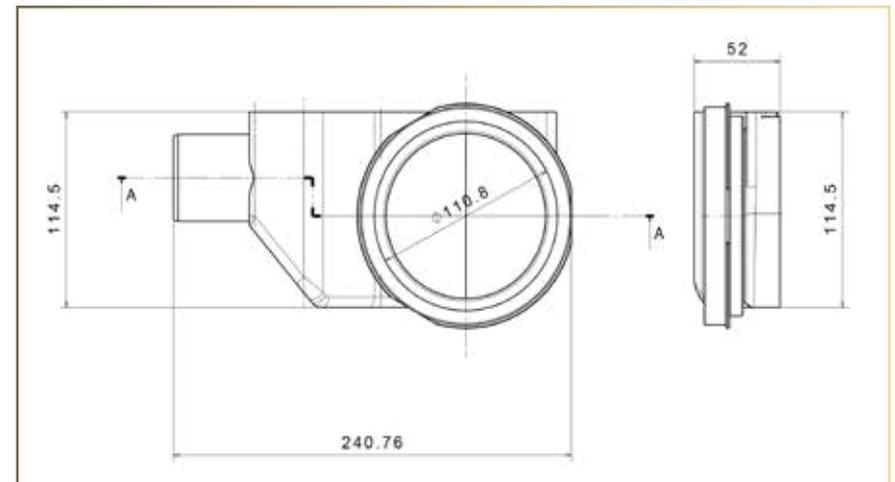

Base of drain





### Easy To Clean

Easy cleaning of drain with just simple pulling out of grid for hair from interior of drain.



### Anti Leaking System



Thanks to new design of holder of grid, all condensed and leaked water under the tile finds it way back to the drain. In complete with self - adhesive butyl tape who comes with product represent Anti Leak System.



### UNLIMITED ceramic height

Thanks to innovative technical solution of "Unlimited" model, customer can install product on any desired bathroom surface.



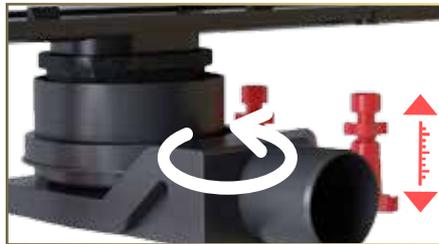


### Adjustment of drain height and base position

Universal solution for adjustment of installation height of drain and possibility of rotation of base for 360 degrees.



### UNLIMITED drain length


Thanks to the universal solution length of drain can be adjusted from 190mm up to UNLIMITED length.

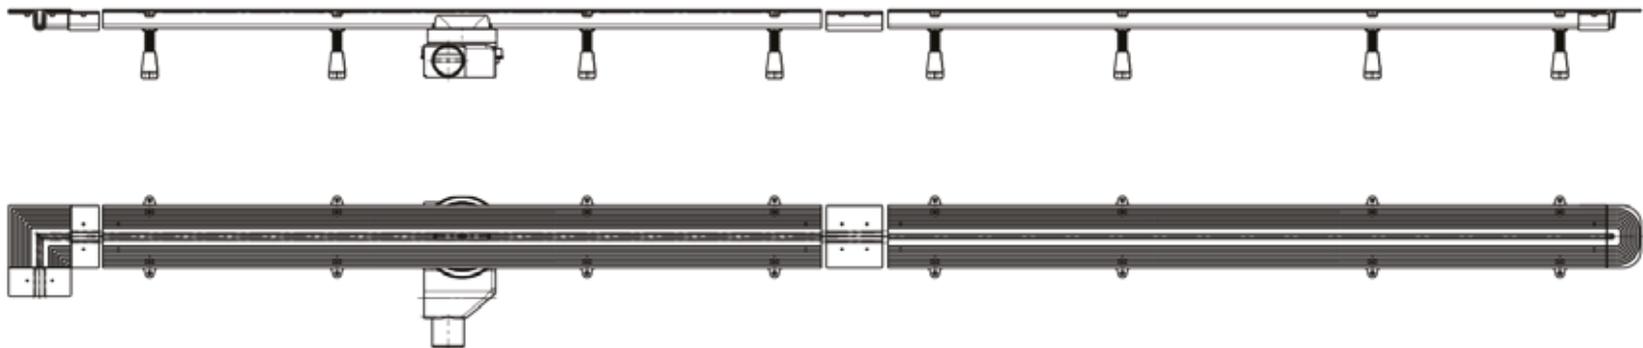





≡ EVO  
Unlimited


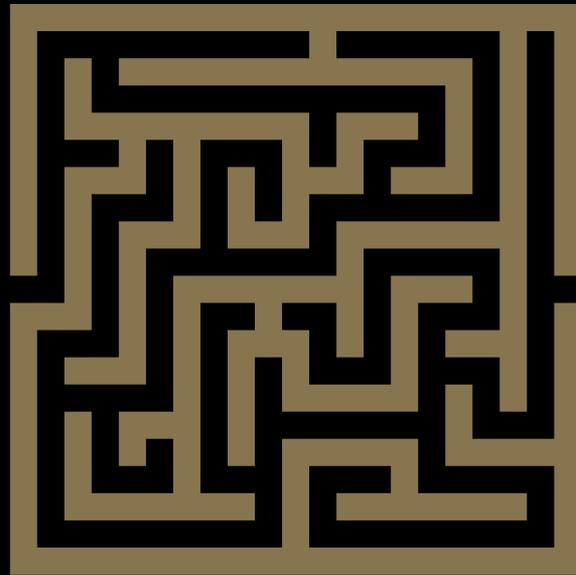



UNLIMITED DESIGN

EVO Unlimited basic design



EVO Unlimited basic design

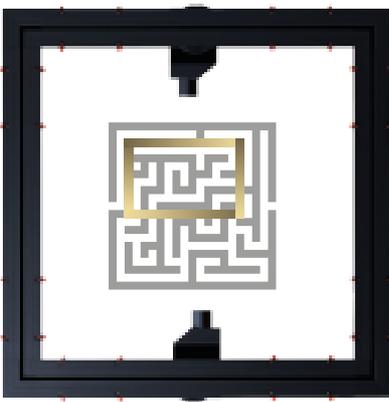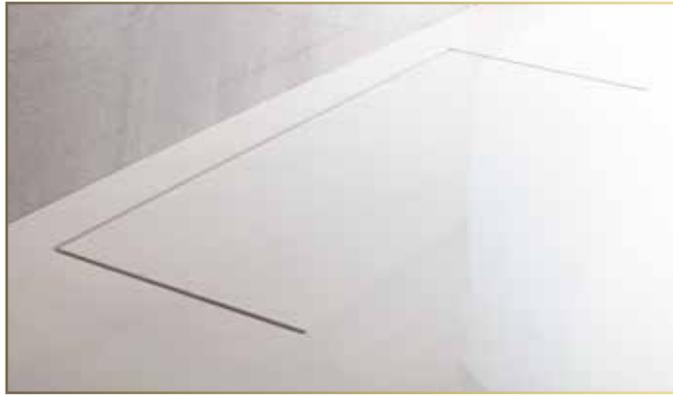

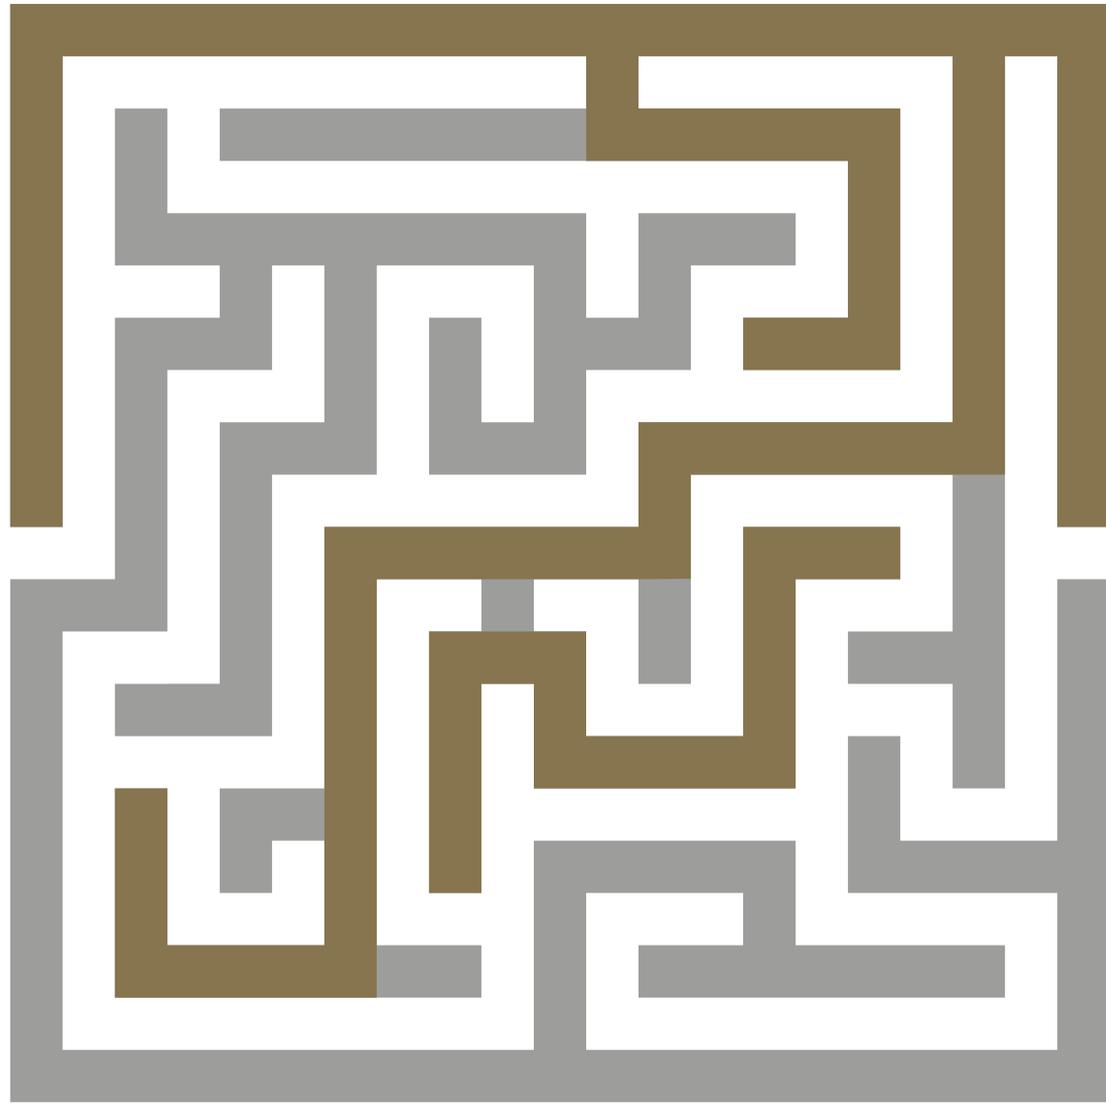

FIND **YOUR DRAIN**  
LABYRINTH OF POSSIBILITIES



## Drain Instalation



### 1. CUTTING

Cutting of EVO UNLIMITED shower drain to appropriate size can be done using a cutting kit which is packed with the product. After cutting, it is obligated to do final process of cutted parts.



### 3. CHANGING DIRECTION OF DRAIN

For changing of direction of drain, you should use angle connector and special glue which comes with product. After infliction of the glue, it is necessary to do additional tightening of connection with screws who comes with the product.



### 2. GLUING - CONTINUATION OF DRAIN

For continuation of EVO UNLIMITED shower drain until unlimited length, you should use flat connector and special glue which comes with product. After infliction of the glue, it is necessary to do additional tightening of connection with screws who comes with the product.



### 4. COMPLETION OF DRAIN

For completion of drain, you should use end piece and special glue which comes with product. After infliction of the glue, it is necessary to do additional tightening of connection with screws who comes with the product.



## EVO Unlimited Set

EVO Unlimited set contains:

- 2 holder of the grid with vertical output
- 2 holder of the grid without vertical output
- 2 base
- 4 straight connectors
- 4 corner connectors
- 4 ends of drain
- 16 Height adjustment legs
- Set of screws
- Glue

Also all parts can be ordered separately and in combination with cutting kit allows client to have unlimited flexibility regarding shape of drain, surface in bathroom and flow rate.



## EVO Unlimited Set Light

EVO Unlimited Set Light contains:

- 1 holder of the grid with vertical output
- 1 base
- 2 ends of drain
- Set of screws
- Glue
- 4 Height adjustment legs

Also all parts can be ordered separately and in combination with cutting kit allows client to have unlimited flexibility regarding shape of drain, surface in bathroom and flow rate.







## Content

Introduction.....	3.
Evo Icons.....	4.
Evo Models.....	5.
EVO Ultra Thin.....	7.
Ultra Thin Line.....	11.
Ultra Thin Square.....	19.
Ultra Thin Wave.....	27.
EVO Line.....	35.
EVO Line Glass White.....	39.
EVO Line Glass Black.....	47.
EVO Line Invisible.....	55.
EVO Line Chrome.....	63.
EVO Unlimited.....	71.
Who We Are.....	94.

## Who We are

Private company Peštan, leader in the Balkans in the production and distribution of products and solutions from the polymers.

Company was founded in in 1989 and has been producing water pipes made of polyethylene. Over time, we introduced new materials (polypropylene and PVC) and expanded product range. Today, in our offer you may find more than 6500 products, divided into four categories:



**PIPING  
SOLUTIONS**



**DRAIN  
SOLUTIONS**



**AGRO CULTURE  
SOLUTIONS**



**HOUSEHOLD  
SOLUTIONS**



+381 034 700 300  
OFFICE@PESTAN.NET

1300 KAPLARA 189  
ARANĐELOVAC  
34300 SRBIJA

---

[WWW.PESTAN.NET](http://WWW.PESTAN.NET)