


















INSTALLATION METHOD

- Installation in prefabricated walls;
- It is installed as a stand-alone element for pre-wall installation in drywalls;
- For universal installation into solid walls.

TECHNICAL CHARACTERISTICS

- Installation depth 80 mm;
- Supporting frame was tested in accordance with NF Standards (XP D12-208) at 400 kg and resistance testing methods on corrosion;
- Dual flush volume adjustable; Small quantity: 2,5 4/Big quantity: 3 6 L;
- Styrofoam insulation against condensation;
- Silent hydraulic fill valve class II, EN 14124;
- Each sample was tested separately during the work;
- Pre-assembled discharge elbow Ø90 mm with reducer Ø110 mm or Ø100 mm;
- Clamps for easy pipe fastening on the cistern frame;
- The set includes all the necessary elements for installation;
- 5 years guarantee on all parts, except rubber parts;
- The set does not contain a flushing plate.



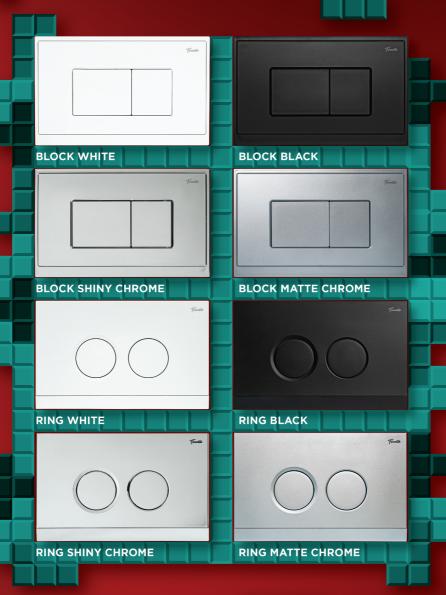



IN BUDGET, IN LIMITED SPACE AND MODERN BATHROOM DESIGN

Fluenta FIT is a concealed flushing cistern with a depth of only 80 mm. Due to the dimensions, it is suitable for fitting in the limited space, whether it is equipping a new bathroom or renovating the old one.

Fluenta FIT has a strong metal construction (complete frame), and a silent hydraulic valve with a recognized NF certificate is for the rinsing. With a great quality-price ratio, Fluenta FIT is affordable and it fits into a limited budget, with elegant and simple lines of the flushing plates fits perfectly in the modern-designed bathroom.

With one of the Ring and Block flushing plates in several colors, your bathroom will exude a dose of elegance and harmony.



More informations at: www.pestan.net