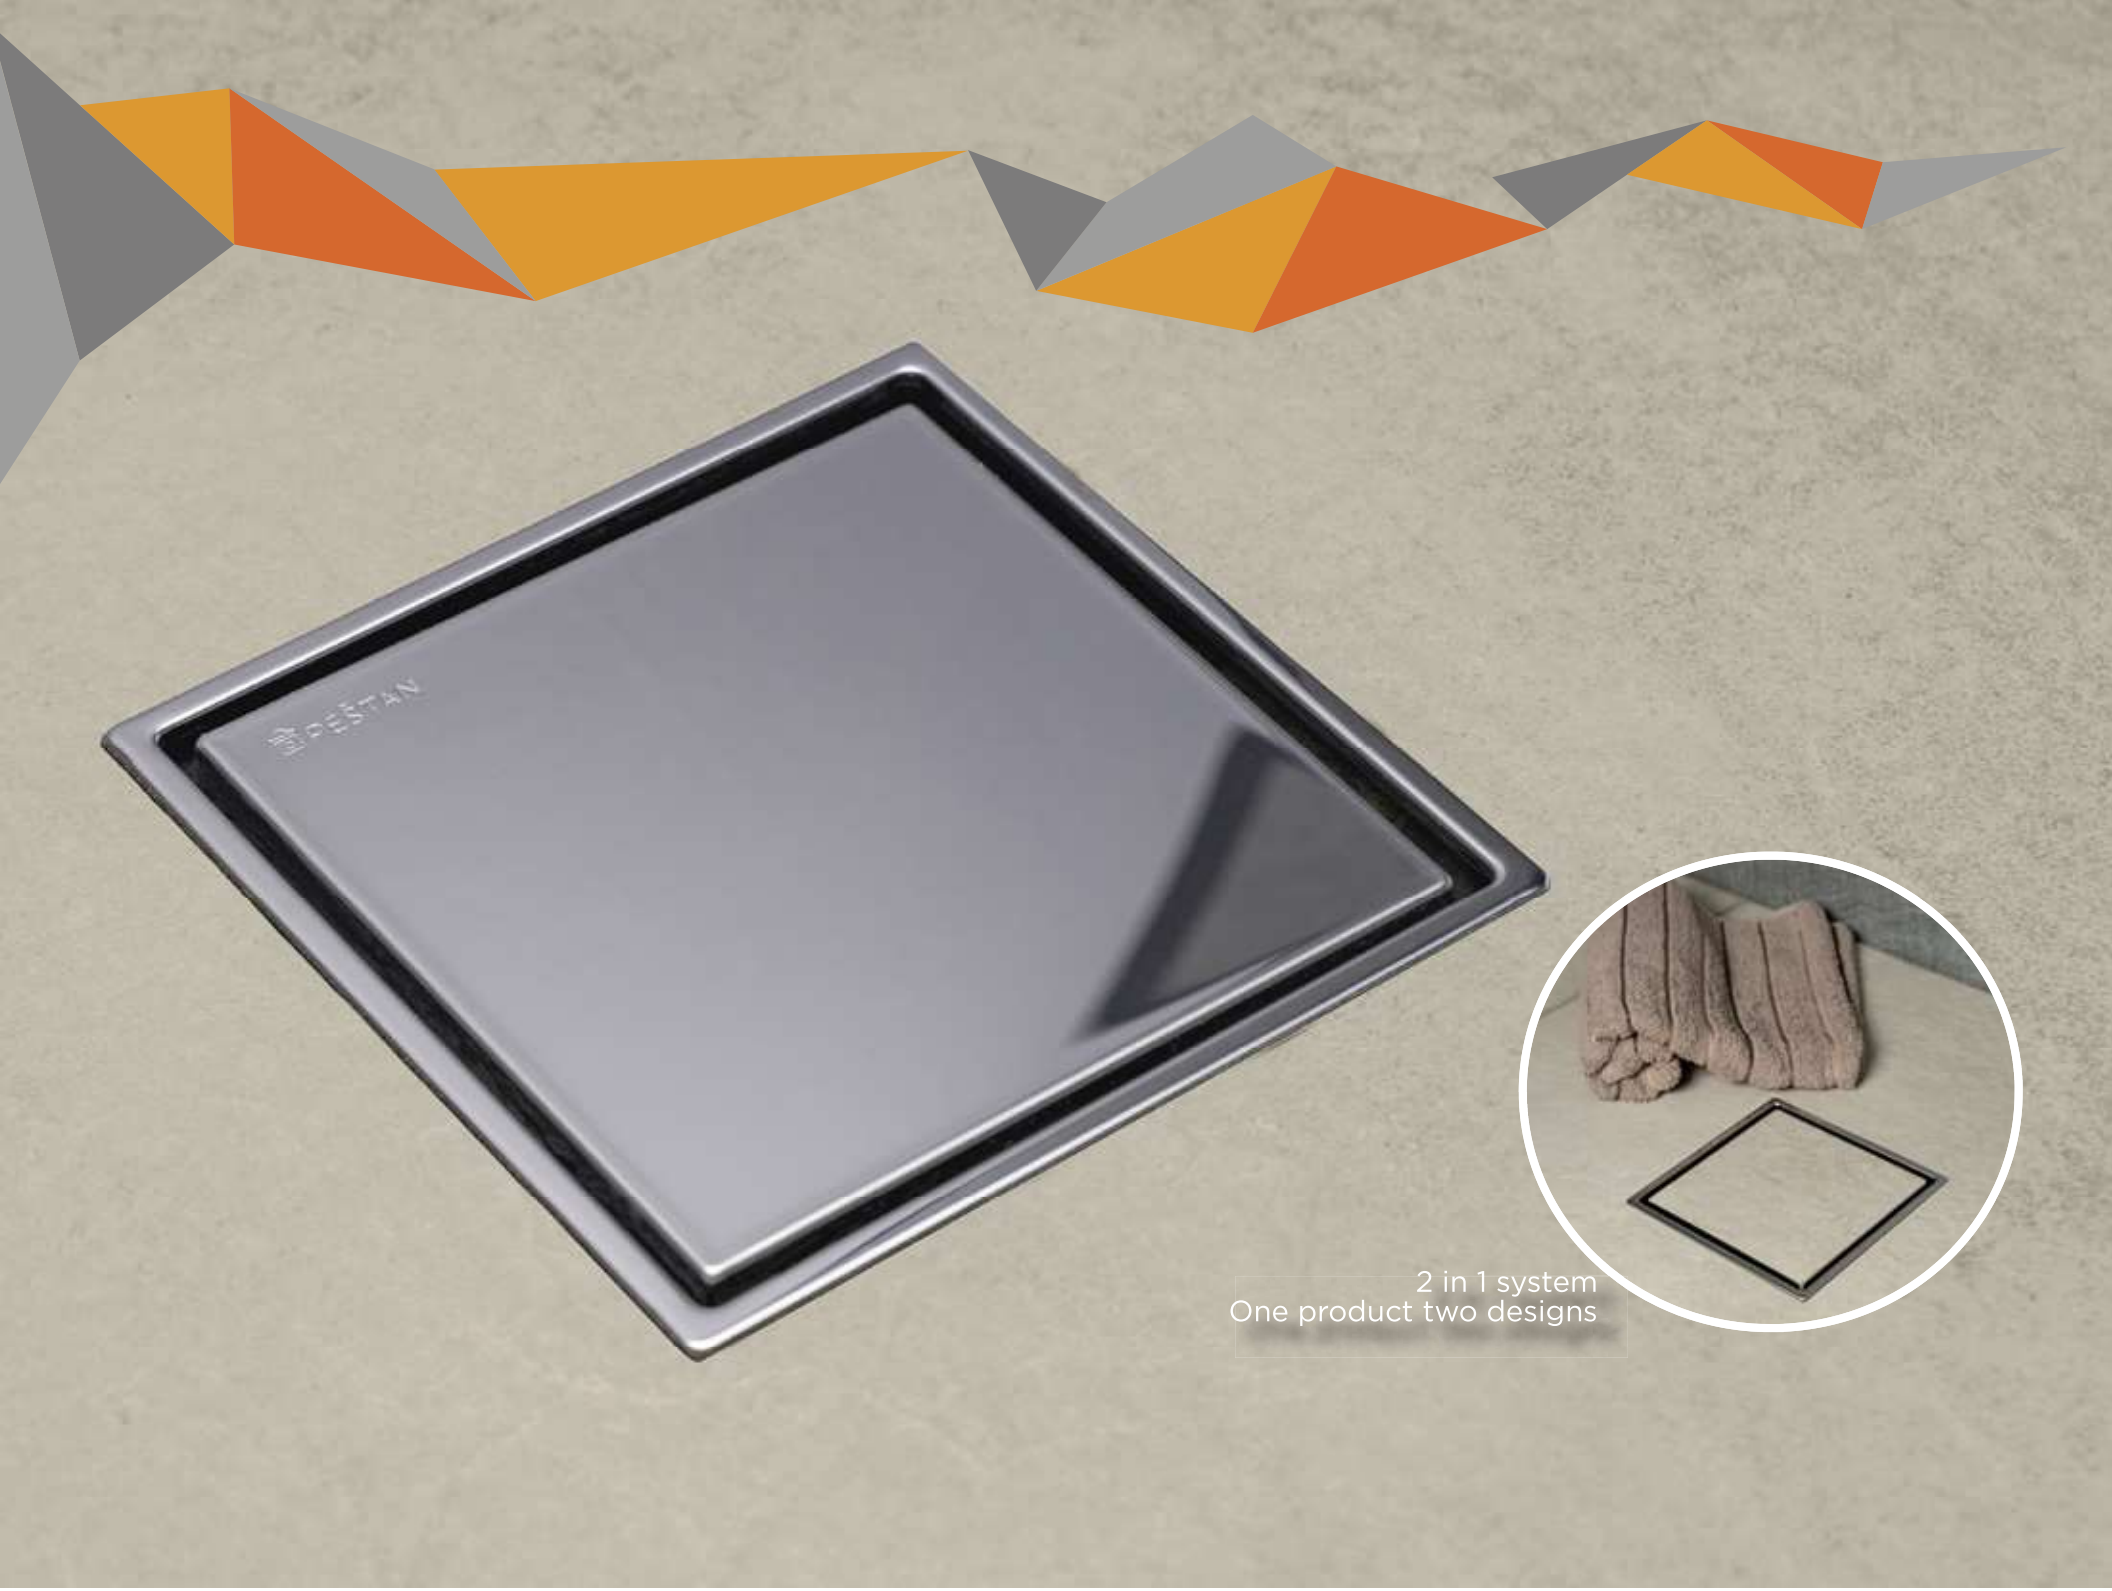
2 in 1 system
One product two designs

Confluo
Standard Plate 2 in 1

Models with 15x15 grid

Optional

Grid design

Models with 10x10 grid - Dry

48l/min
Maximum flow rate

ø50 output
Base diameter outlet

2 in 1 system
2 in 1 system

ø40 inlet
Base inlet diameter

360° base rotation
Base rotation

easy access
Handicapped accessible

15°
Fine output adjustment

Unltd
Ceramic adjustment

AISI 304
Material of grid