









bathroom solutions

## WE ARE

We are a privately held company Peštan, the leader in the Balkans in production and distribution of products and solutions from polymers.

The company was founded in 1989 and has been producing water pipes made of polyethylene. Over time, we introduced new materials (polypropylene and PVC) and an expanded product range. Today, in our offer you may find more than 8.500 products, divided into four categories:



PIPING SOLUTIONS




BATHROOM SOLUTIONS



AGRICULTURE SOLUTIONS



HOUSEHOLD SOLUTIONS

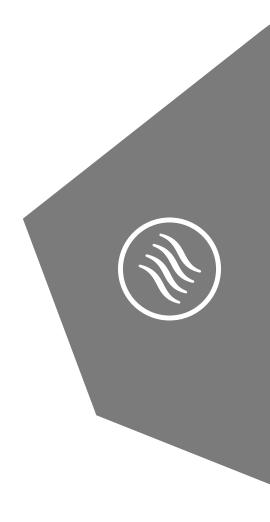

Edition 4

Production facilities of company Peštan are located in Arandjelovac, Serbia. Annual revenue exceeding 150 million €, which is realized with the help of 1.200 employees. Peštan has a direct presence, through its daughter companies, in Bosnia and Herzegovina, as well as in Romania and through its representative offices in Albania, Croatia and the United Arab Emirates. Peštan operates in more than 80 countries worldwide through a global network of agents and distributors. Primarily export-oriented, the company is present in the market of Europe, Russia, Middle East, North Africa, Latin America and the United States.

The entire production is adjusted to European standards which is proved by international certificates for quality products:

IGH, Bulgarkontrola, INSTA-CERT-DANCERT, MPA, DVGW, ITC, EBETAM, EMI, GOST, ICC, IAMPO, KIWA, SKZ, SPSC, VUPS, VUSAPL, BENOR, BELNIIS, HESSEL, TZW, FRAUNHOFER, CSI, MIRTEC and certificates of quality process ISO 9001, ISO 14001, ISO 45001, ISO/IEC 27001, ISO 50001. For maximum satisfaction of customer needs, the company is constantly innovating and improving personnel and equipment. Since 2009, the company introduced the SAP ERP modules MM, SD, PP, FI CO, and since 2012 have extended functionality and WMS was included. The introduction of WCM and WMS system has increased the efficiency, contributed to the allocation of costs and professional maintenance. Central warehouse is located in Serbia, Arandjelovac, which is sized

and designed to meet the requirements of the most demanding customers who want efficient and reliable delivery of products.

To respond to these requirements, Peštan has 15.000 m² of closed storage space for finished and semi-finished products, 10.000 m² warehouse for raw materials and intermediate goods, and approximately 150.000 m² of open storage space. Our vision is to be recognized as a leader in the Balkans, which provides customers with diversified solutions and products in one place. Our mission is creating a competitive advantage in our customers' businesses with the help of first-class solutions, services and products. We provide our company's success by consistently meeting the needs of clients, stakeholders and employees.



## BATHROOM SOLUTIONS

Peštan bathroom solutions program contains 2 product groups under two brands: Confluo shower drains, Fluenta build-in cisterns, and Fluenta toilet bowls.

Confluo is a shower drain brand that has been recognizing Pešan company as a globally well-known drainage expert in the bathroom industry for a long time. Fluenta build-in cistern and toilet bowls are the newest product in our bathroom portfolio and represent our desire to offer complete and top quality solutions for the bathroom.







#### Confluo icons



#### Min. installation height

Minimal construction height of drain, from bottom of the base up to the holder.



#### Base diameter outlet

Diameter of base outlet.



#### Maximum flow rate

Maximum flow rate with 20 mm




#### Base inlet diameter

Diameter of base inte



#### Anti-leaking system

Anti-Leaking System represents combination of drain construction and proper installation which allow all leaked and condensated water to be health to drain.



#### 2 in 1 system

Grid of drain can be turned and used both for stainles steel/gold and ceramic/glass finish.



#### Base rotation

Base of drain can be rotated 360°



#### Fine output adjustment

Output of drain can be adjusted by 15°.



#### Water seal height



#### Fine ceramic adjustment

Model have system for ceramic height leveling, so clients have flexibility in choosing surface in hathroom



#### Self-cleaning base

The output of drain is constructer in a way that whatever goes through the grid for hair will also go trough output for sure, and then through the sewage system.



#### Handicapped accessible

Easy access to the shower



#### Material of grid

Grid is made of stainless steel AISI 304. Optionaly, we can produce grid from stainless stee AISI 316.



#### Load class of grid

Grid is classified as K3, which means that it can withstand 300 kg of pressure



#### Ceramic adjustment

Unlimited ceramic height leveling

#### Confluo Linear drains

We produce our Confluo Linear drains in 4 different models (Premium Line, Compact Line, Slim Line and Frameless Line), 9 different sizes (300, 450, 550, 650, 750, 850 and 950 mm) and 4 different grid finishes (Stainless Steel, Black Matte, Glass and Gold). All models, except Slim, have 2 in 1 system where the same model can be used both with Stainless Steel/Gold and Tile/Glass finish and are characterized as ultra low 360 degrees rotable self-cleaning S base.



#### Confluo Wall drain

As Peštan Company always follows trends on world market, we have prepared for our customers the latest model in world of shower drains — Wall drain. This model represents innovation in industry and, besides its new and modern design, it is perfect model for renovations and bathrooms with concealed cisterns. Wall drain has body made of plastic and it is supplied with 2 different grids (Stainless Steel and Gold).



#### Confluo Board

Peštan "Board" program of preinstalled shower drains represents the result of constant searching for better and more efficient solutions for our customers worldwide. With this product, we made a big step ahead concerning waterproofing, safety and aesthetics, as we have minimized possibility of mistake and significantly reduced the time and effort for installation. With this product, as a producer, we have taken responsibility on our side and made modern, quality and time effective solutions for our clients.



#### Confluo Standard drains

Peštan Company offers to clients more than 150 different models of Confluo Standard drains. All models have body made of plastic and grid made of stainless steel, glass or gold, which we possess in various designs (Tide, Square, Drops, Plate 2 in 1, Black & White Glass, Ceramic and Gold) and sizes (10x10 cm, 15x15 cm and 20x20 cm). Main advantages are: Big variety of models, maximum flow rate, modular and flexible systems with 6 different outputs, 3 different types of siphons. You can make your own floor drain system easy for installation and maintenance.






## Ultra low S base

#### Main advantages:

- 1. 360° rotation
- 2. Superior flow rate 48 l/min
  - DN 50 mm output
- 3. Ultra low -50 mm
- 4. Acute angle of siphon  $-40^{\circ}$
- 5. Self-cleaning
  - Smooth plastic
  - Wide channel for water, without any obstacles

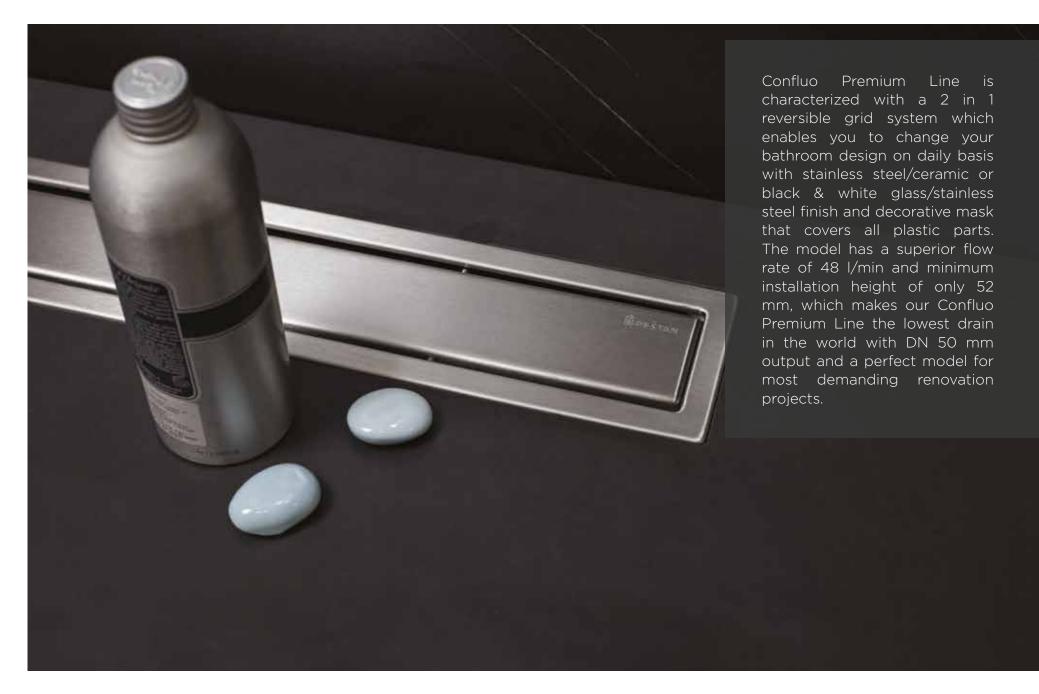

## Confluo Premium Line

#### Main advantages:

- Minimum installation height 52 mm
- Maximum flow rate 48 I/min
- Reversible grid 2 in 1 system
- 360° rotatable self-cleaning S base
- Without visible plastic parts

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm

#### **Grid Design**















#### CONFLUO PREMIUM LINE

Premium **300** Premium **450** Premium **550** Premium **650** Premium **750** Premium **850** Premium **950** 





#### Min. installation height



#### Maximum flow rate



2 in 1 system



#### Self-cleaning base



#### Load class of grid



#### Base diameter outlet



#### **Base rotation**



#### Water seal height


AISI 304


Material of grid



White Glass/ 24k Gold Plated

# 2 in 1 System & Grid design options

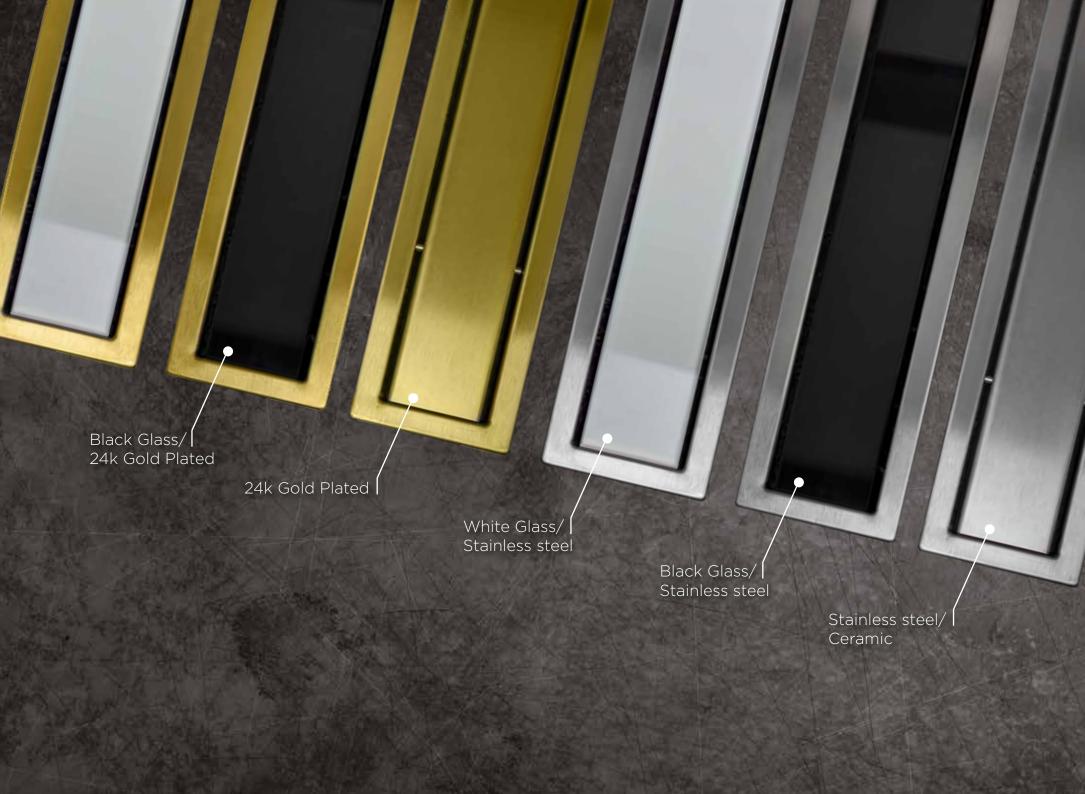

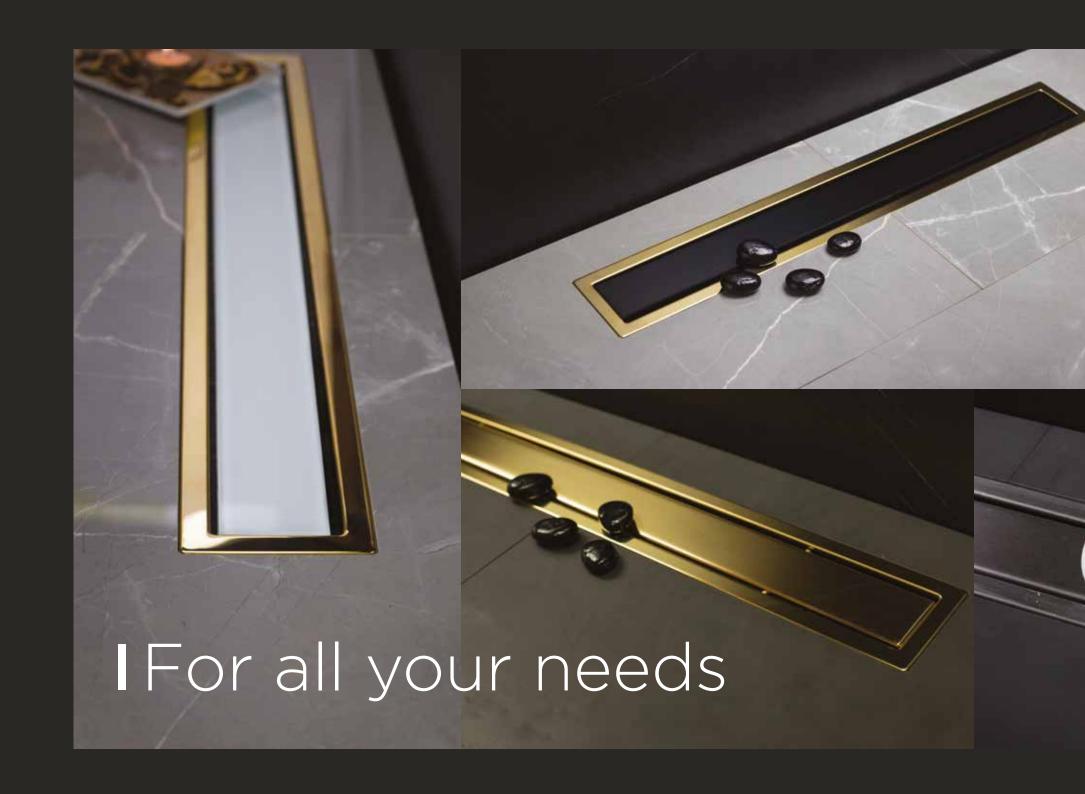





# Confluo Compact Line Premium

#### Main advantages:

- Minimum installation height 52 mm
- Maximum flow rate 48 l/min
- Combined siphon wet + dry
- Reversible grid 2 in 1 system
- 360° rotatable self-cleaning S base
- Without visible plastic parts

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm

#### **Grid Design**











#### CONFLUO COMPACT NET LINE PREMIUM



#### Min. installation height



#### Maximum flow rate



2 in 1 system



#### Self-cleaning base



#### Load class of grid



#### Base diameter outlet



Base rotation



Water seal height

AISI 304

Material of grid














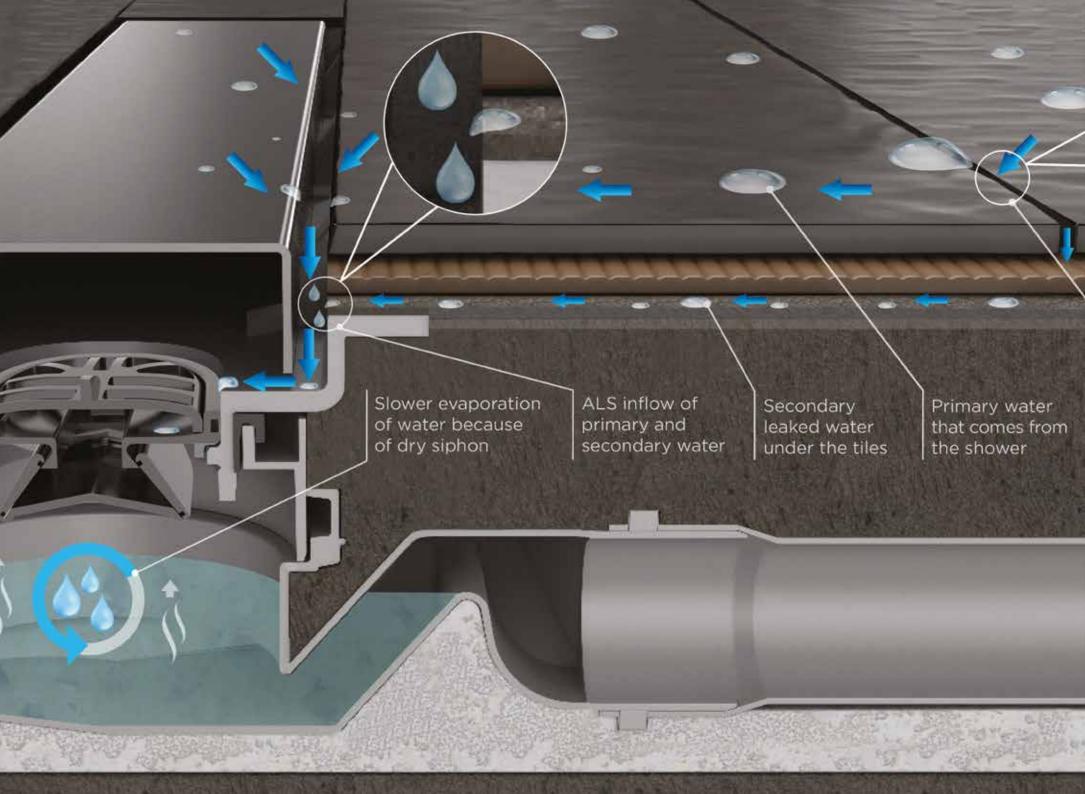


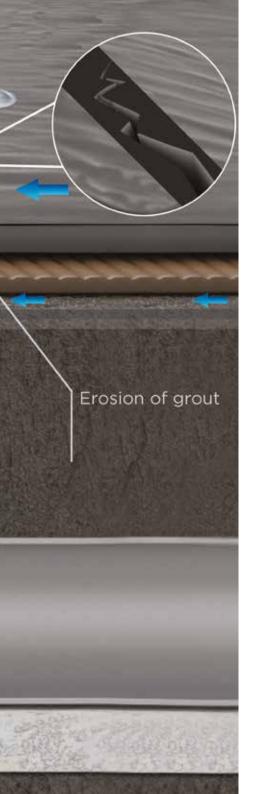

## ALS Anti-Leaking System

ALS — Anti-Leaking System represents combination of drain construction and proper installation, which allows all leaked and condensated water under the tiles to go back to the drain.

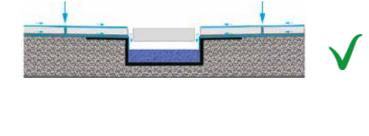






moisture in the bathroom. Usually it takes 5-7 years until this problem happens and then a leakage shows up in a place where waterproofing was finished. We have solved this problem with our construction of grid holder, where you have no barrier for water under the tiles. Also, in order that this system works properly, it is very important to do correct slope screed and proper waterproofing as per our instruction manual.

During the years, water in bathroom has tendency to build under the tiles as consequence of erosion of grout and

Cross section of linear drain

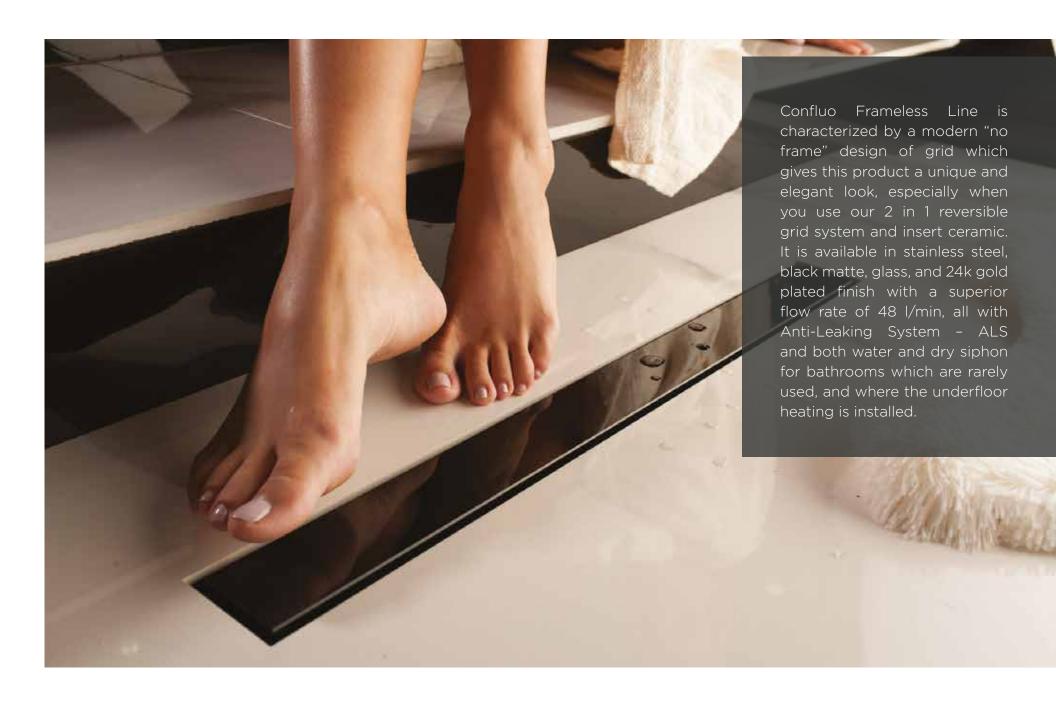

### Confluo Frameless Line

#### Main advantages:

- Minimum installation height 62 mm
- Maximum flow rate 48 l/min
- ALS Anti-Leaking System
- Reversible grid 2 in 1 system
- 360° rotatable self-cleaning S base
- Combined siphon wet + dry

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm

#### **Grid Design**













#### 62 mm

#### Min. installation height



Maximum flow rate



#### Self-cleaning base



Load class of grid



#### Anti-leaking system



#### **Base diameter outlet**



#### **Base rotation**



#### Water seal height



Material of grid


#### CONFLUO FRAMELESS LINE





#### Legend:

- 1 I Iltra low S Raso
- 2. Height adjustment legs
- 3. Reducer with rubber ring
- 4. Grid holder
- 5.1 Grid for hair flow rate 48l/min
- 5.2 Dry siphon flow rate 26l/min 6. Grid
- 7. Protective styrofoam
- 8. Mapei waterproofing butyl tape



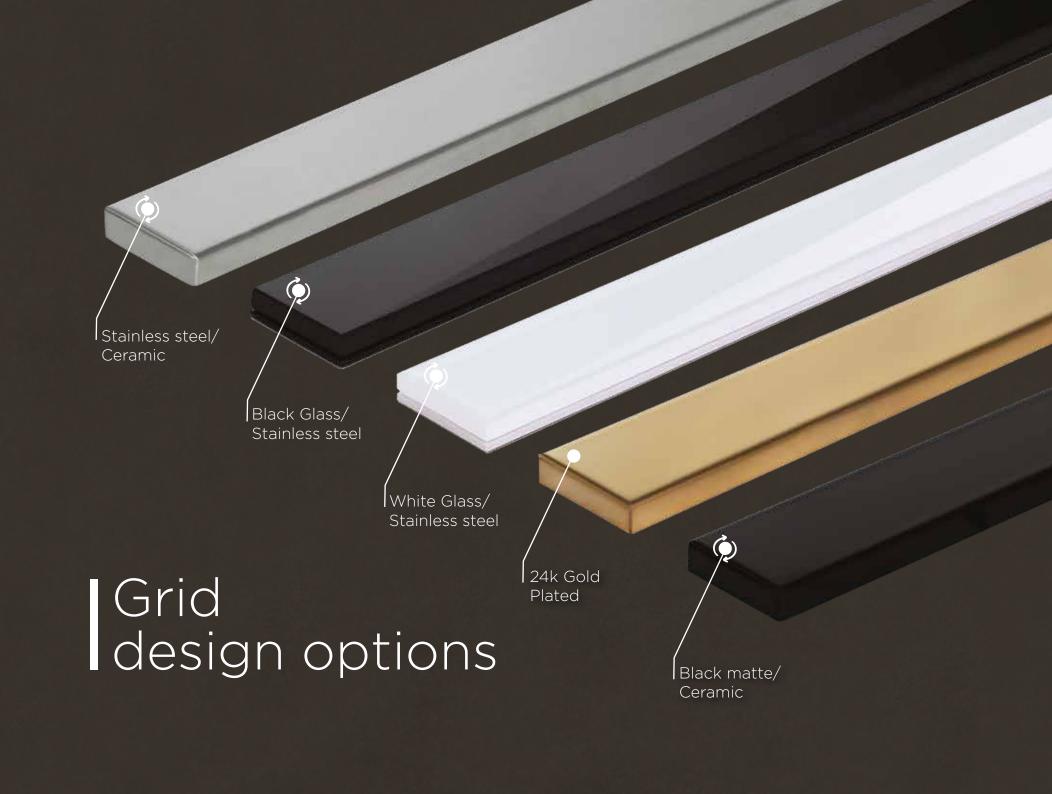


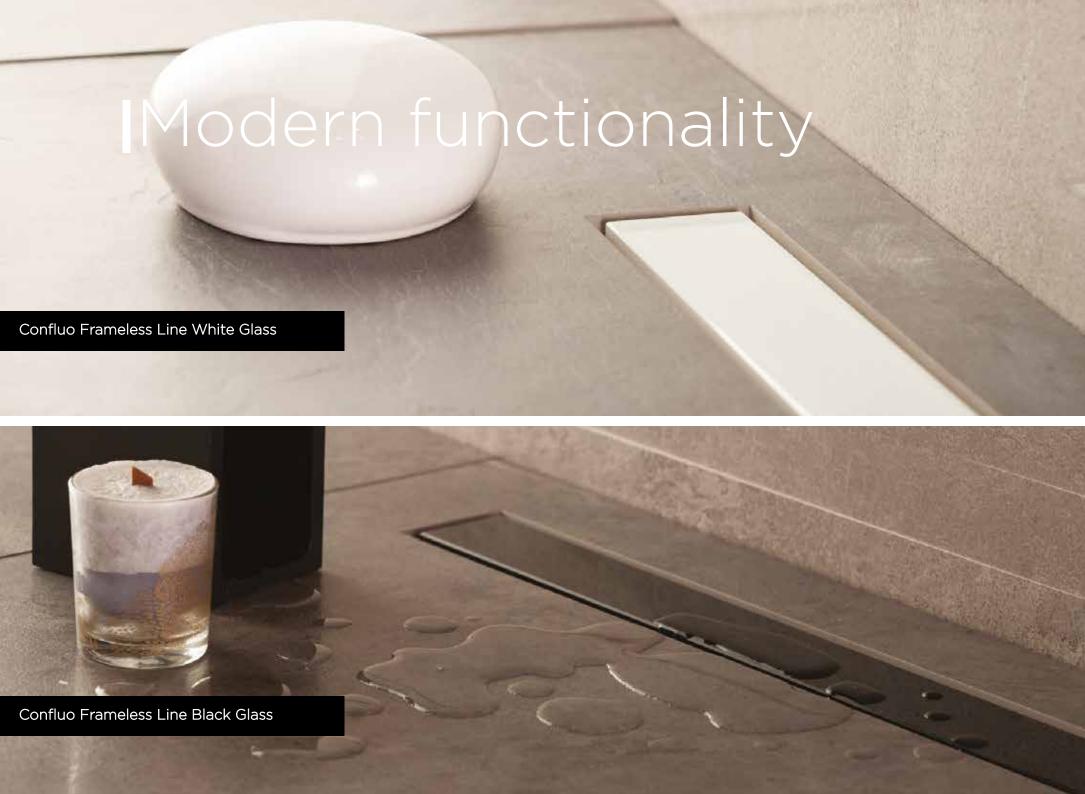

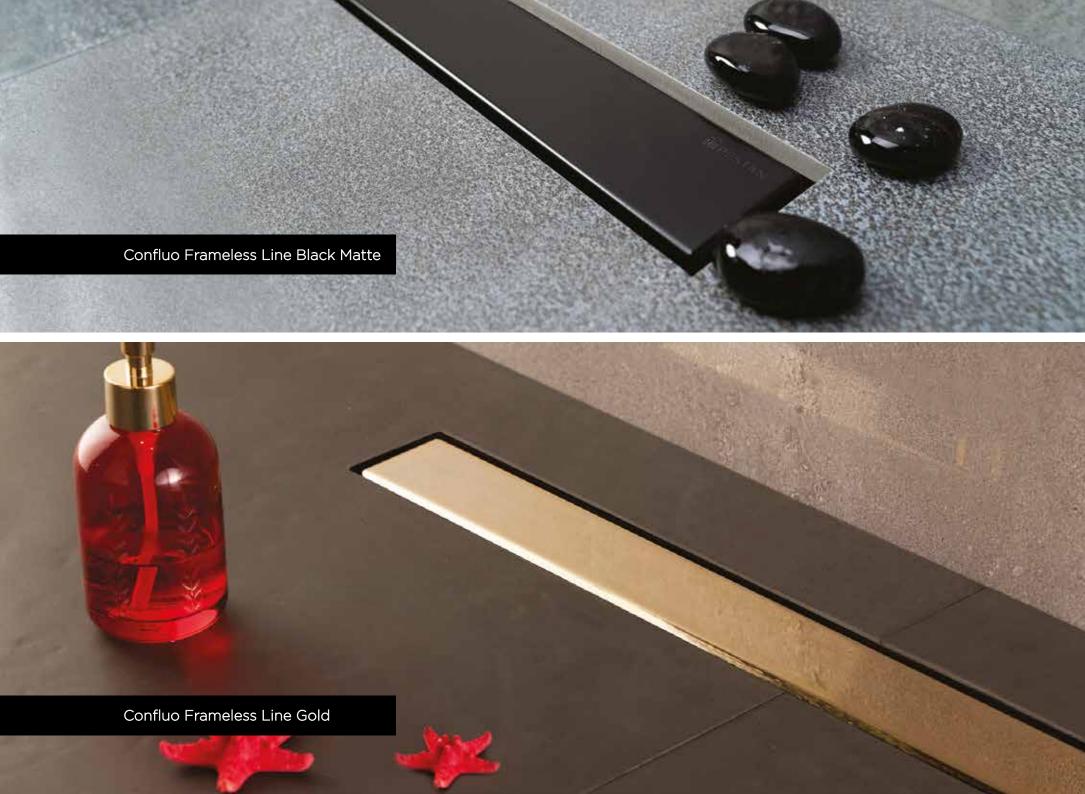





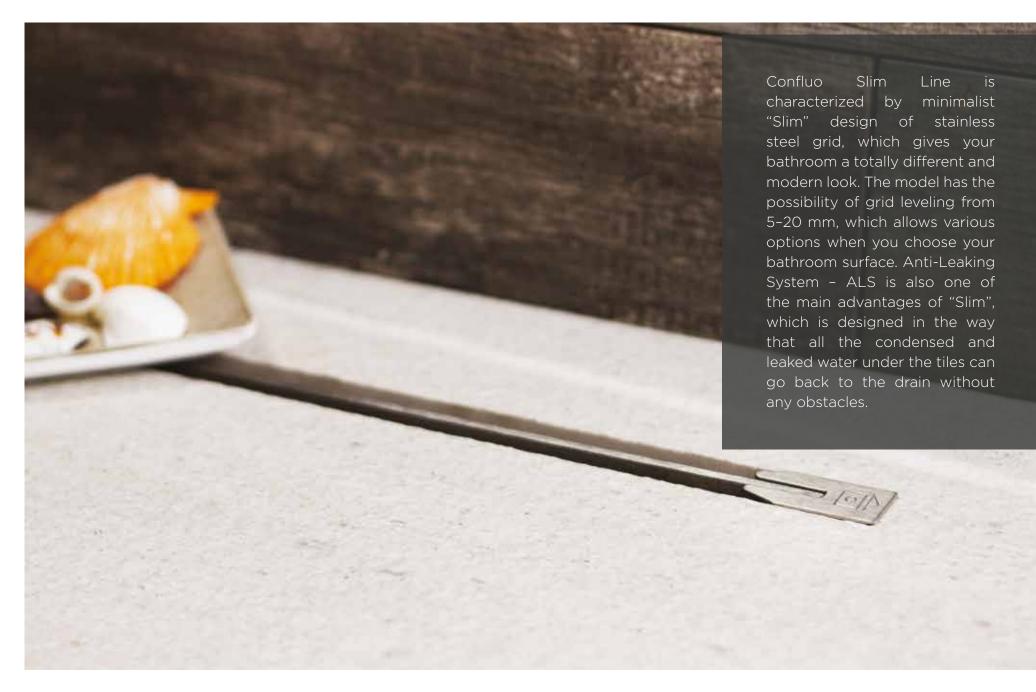

# Confluo Slim Line

## Main advantages:

- Minimum installation height 72 mm
- ALS Anti-Leaking System
- Unique and minimalist design of grid
- 360° rotatable self-cleaning S base
- Height adjustable grid 5—20 mm

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm


#### **Grid Design**





## 72 mm

#### Min. installation height



Maximum flow rate



Self-cleaning base



Water seal height



Handicapped accessible



Anti-leaking system



**Base diameter outlet** 



Fine ceramic adjustment



**Base rotation** 



CONFLUO SLIM LINE

#### Legend:

- 1 Ultra low S Base
- 2. Height adjustment legs
- 3. Reducer with rubber ring
- 4. Grid holder
- 5. Grid for hair
- 6. Decorative plate
- 7 Grid
- 8. Aluminium profile for ceramic
- 9. Mapei waterproofing butyl tape



# Confluo Wall drain

## Main advantages:

- Minimum installation height 56 mm
- Maximum flow rate 48 l/min
- ALS Anti-Leaking System
- 360° rotatable self-cleaning S base
- Perfect model for renovations and bathrooms with concealed cistern

Dimensions: 300 mm

#### **Grid Design**

Stainless steel

24k GOLD PLATED



## 56 E

#### Min. installation height



Maximum flow rate



Self-cleaning base



Water seal height



Handicapped accessible



**Anti-leaking system** 



Base diameter outlet



**Base rotation** 




CONFLUO WALL DRAIN


WALL **300** 

#### Legend:

- 1 Ultra low S Bas
- 2. Height adjustment legs
- 3. Reducer with rubber ring
- 4. Grid
- 5. Grid holder
- 6. ALS chambers
- 7. Mapei waterproofing butyl tape



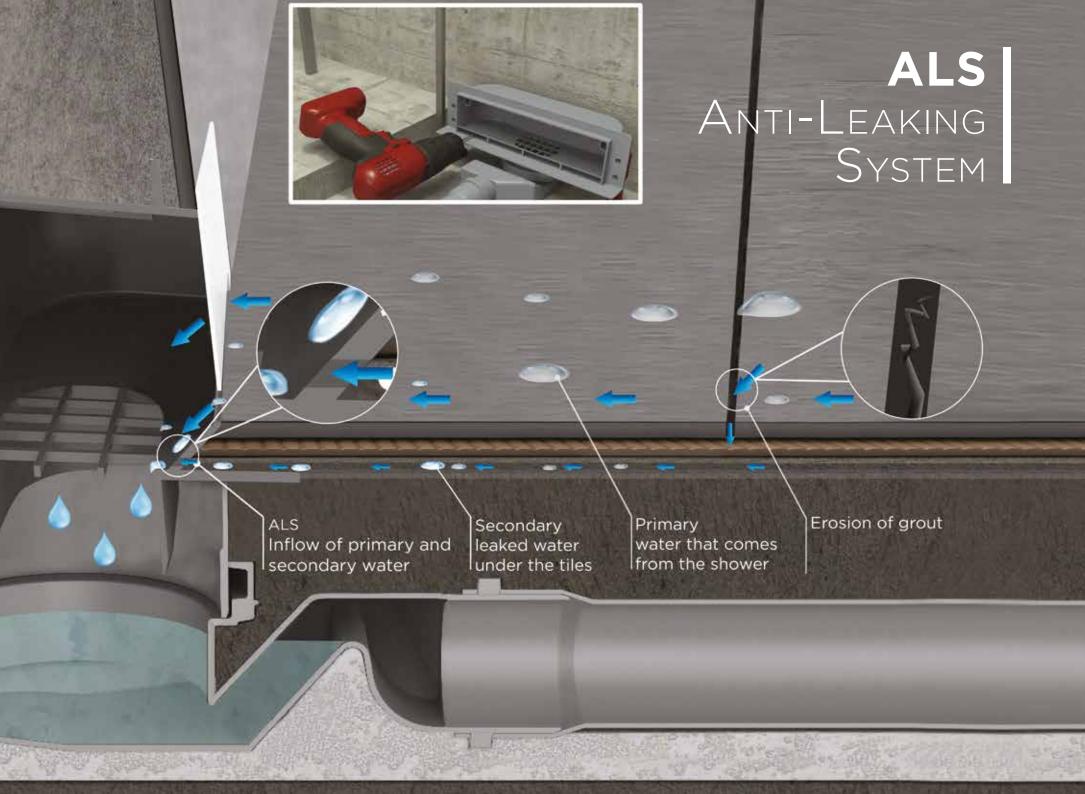

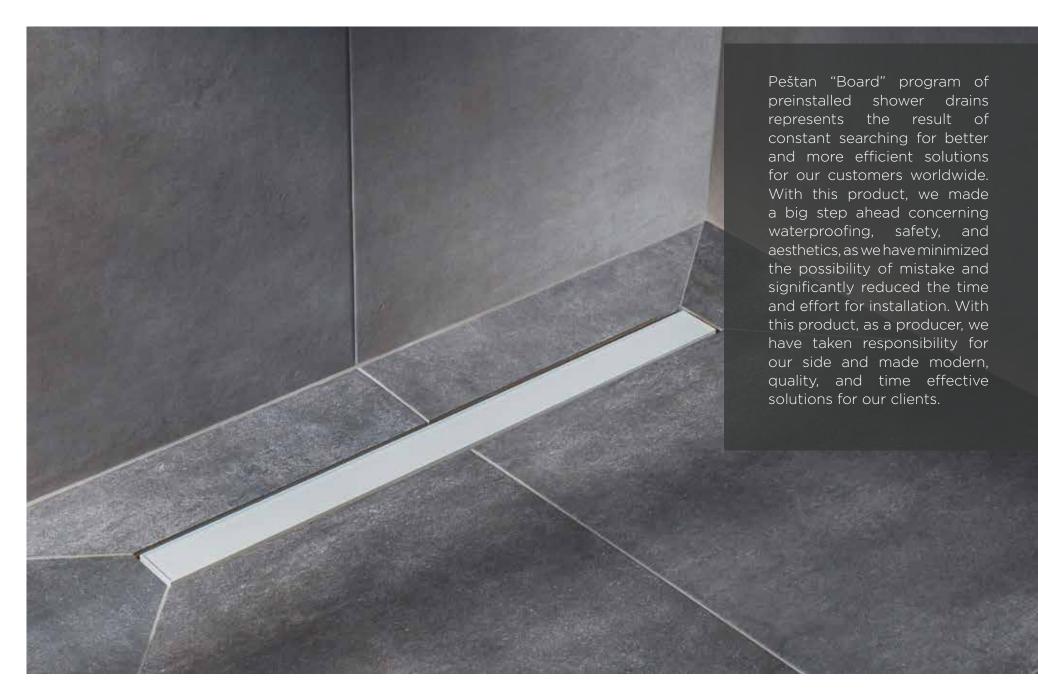

# Confluo **Board**

### Main advantages:

- Peripor Board 45 kg/m³
- MAPEI waterproofing
- Time and cost effective
- High Flow Rate 48 I/min
- ALS Anti-Leaking System
- Combined siphon wet + dry

### Board dimensions:

- UNI 900
- UNI 1200
- 900X900X80/95 mm
- 900X900X38/52 mm
- 1200X1200X80/95 mm
- 1200X1200X35/54 mm

#### **Grid Design**













# 48I/min

#### Maximum flow rate

2 in 1 system

#### 2 in 1 system



#### Self-cleaning base



#### Water seal height



#### Load class of grid



#### Handicapped accessible



#### Anti-leaking system



#### Base diameter outlet



#### **Base rotation**

AISI 304

Material of grid




- \* Board and grid are sold separately
- In both UNI 900 and UNI 1200 is integrated Frameless Line 550 mm
- In 1200x1200 mm Confluo Board is integrated Frameless Line 850 mm
- In 900x900 mm Confluo Board is integrated Frameless Line 750 mm

#### Legend:

- Peripor board with integrate waterproofing
- 2. Grid holder
- 3. Ultra low S base
- 4. MAPEBAND tape
- 5. Protective cap
- 6. Maintenance key
- 7. Reducer with rubber ring
- 8.1 Dry siphon
- 8.2 Grid for hair
- 9. Grid
- 10. Protective styrofoam

## Confluo Board benefits:

- 1. **Peripor Board** Peripor is expandable polystyrene (EPS) that is particularly suitable for applications exposed to compressive load. The most important properties of Peripor are:
  - Excellent thermal insulation capacity
  - High density 45 kg/m<sup>3</sup>
  - Outstanding impact absorption
  - Low weight
  - Imperviousness to moisture
- 2. **MAPEI waterproofing** On Confluo Board is factory applied one of the most quality waterproofings, MAPELASTIC Turbo two-components rapid-drying elastic cementitious mortar and MAPEI waterproofing butyl tape which guarantees 100% water tightness of our system.
- 3. **Dovetail Joint** This method of joining the plates provides the strength of a joint that is resistant to all possible stresses. Also, it prevents entering concrete between the plates.
- 4. **Time and cost-effective** A great benefit of the Confluo "Board" preinstall shower drains is that installation time and price is significantly reduced as a board have integrated slopes and applied MAPEI waterproofing.
- 5. **High Flow Rate** System provides a flow rate of 48l/min, which is in accordance with the highest standards.

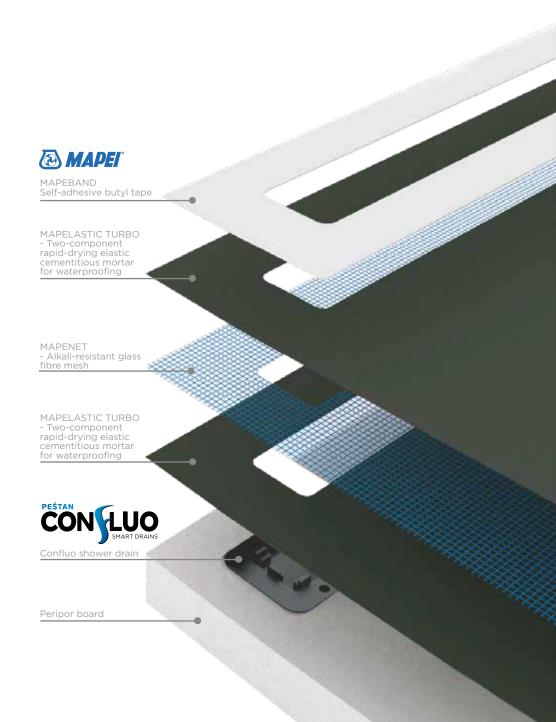

# Confluo UNI Board

#### **Board dimensions:**

- 900 x 900 mm
- 1200 x 1200 mm


#### **Grid dimensions:**

• 550 mm

### 1st layer thickness:

- 38 52 mm Board UNI 900 35 54 mm Board UNI 1200

### 1st + 2nd layer total thickness:

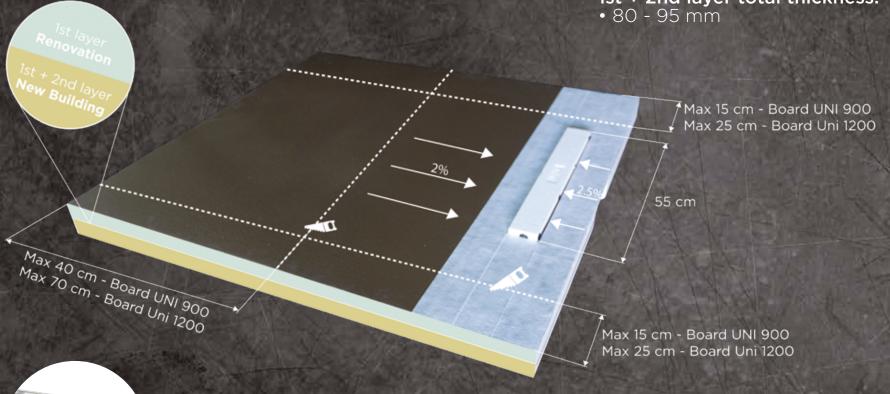



The product box contains already cut Confluo board on 2 thicknesses. If you use only the top layer it is a perfect model for renovation with under 40mm board height in the lowest point. If you use both layers it transforms Confluo Board Uni in an ideal solution for bathrooms with only concrete slab and replaces screed in shower area 100%.



# Confluo Standard

## Main advantages:

- Minimum installation height 56—78 mm
- Maximum flow rate 48 l/min
- Unlimited leveling of ceramic
- Modularity 7 different output options,
   4 different siphons, 11 grid options
- Rotable 360° base rotation + 15° angle rotation

#### **Grid finish**



# Types of Confluo **Standard** Grids



SQUARE 15x15



TIDE 15x15 AND 10x10



Drops 15x15



PLATE 2 IN 1 15x15 AND 10x10



ANGLE 20x20



BLACK GLASS 15x15 AND 10x10



WHITE GLASS 15x15 AND 10x10



Ceramic 15x15 and 10x10

# Types of bases for Confluo **Standard** drains



Base with 1 horizontal outlet



Base with 1 horizontal outlet/1 inlet



Base with 1 horizontal outlet/3 inlets




VERTICAL BASE



VERTICAL BASE FOR DRY SIPHON MODELS



S BASE WITH 28 MM OF WATER SEAL AND ADJUSTABLE OUTPUT



Ultra low S base with 25 mm of water seal



# Confluo Standard drains with metal grid




Maximum flow rate



Grid design Models with 15x15 grid Optional







**Base diameter outlet** 

Base inlet diameter



**Base rotation** 



78

mm

38 mm



78

1 mm

Models with 10x10 grid







56

1 mm



69

] mm

78

mm

mm

34 mm





Grid design

24k



Handicapped accessible



1 mm

28

78

mm

38 mm






Fine output adjustment



Ceramic adjustment

**AISI 304** 

Material of grid

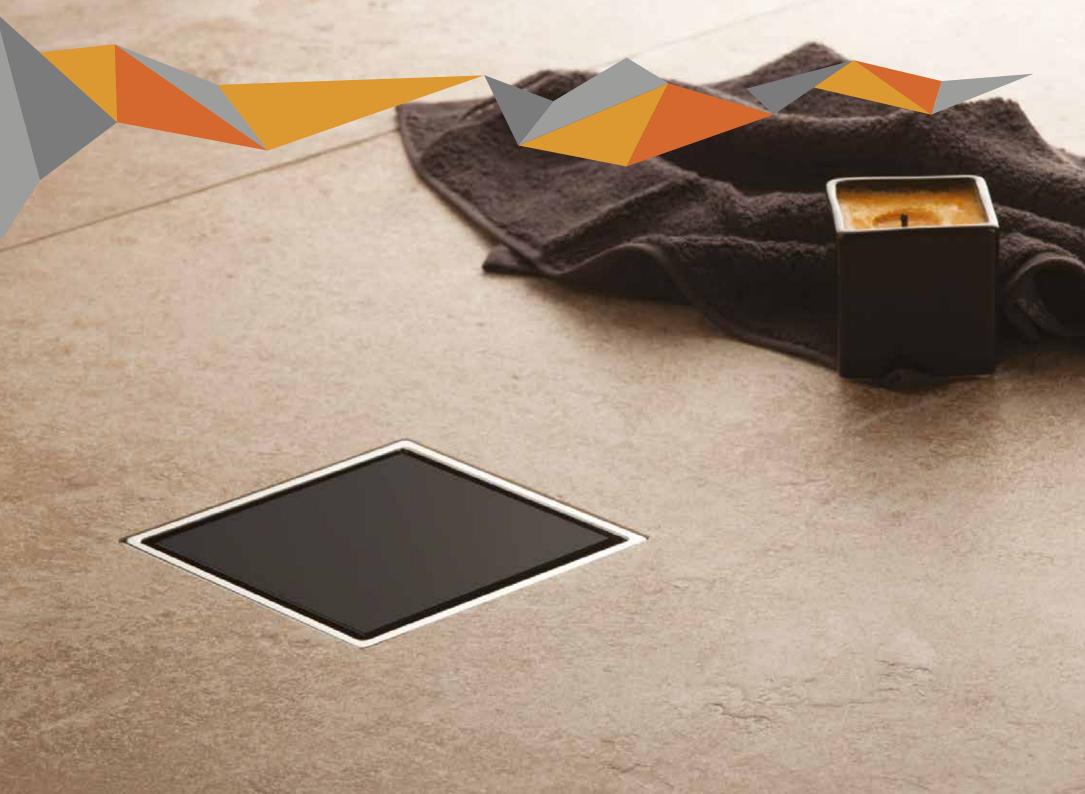

# Confluo **Standard** Glass drains



Maximum flow rate

#### Models with 15x15 grid









Grid design







ø**50** output

**Base diameter outlet** 



**Base inlet diameter** 



Base rotation

#### Models with 10x10 grid






Handicapped accessible



Fine output adjustment



Ceramic adjustment

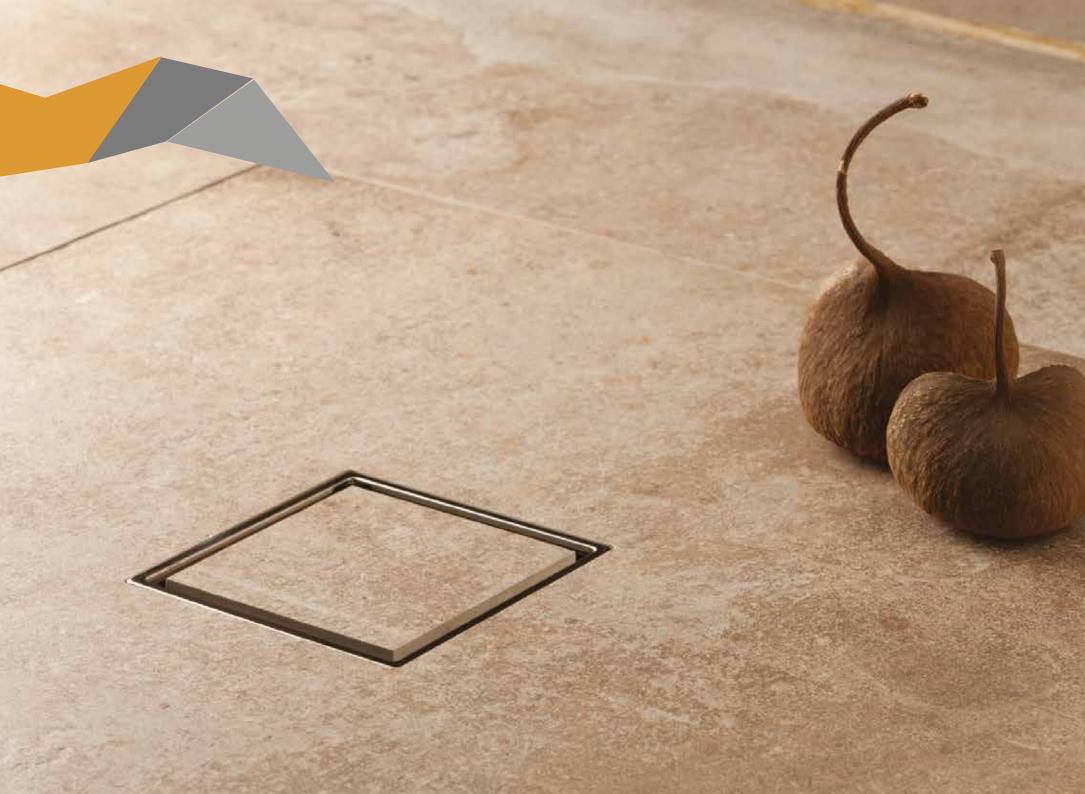


# Confluo **Standard** Ceramic drains



Maximum flow rate



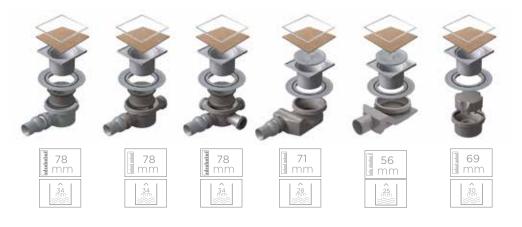



Irretrievable valve

flange

30 mm





**Base diameter outlet** 



Ceramic tile/ Stainless steel



Ø40 inlet

**Base inlet diameter** 



Base rotation

#### Models with 10x10 grid - Dry

38



easy


Handicapped accessible



Fine output adjustment



Ceramic adjustment

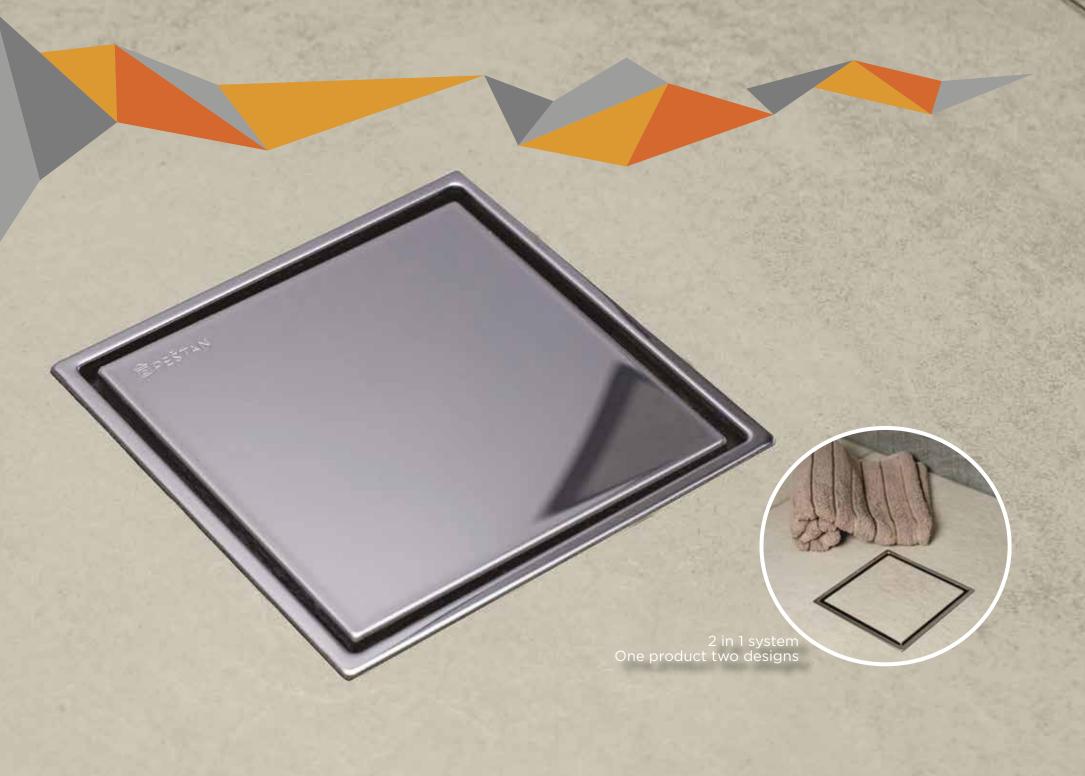

## Confluo Standard Plate 2 in 1



Maximum flow rate

Ø50 output

#### **Base diameter outlet**

Grid design

2 in 1 system

2 in 1 system



#### Base inlet diameter



**Base rotation** 





Fine output adjustment



**Ceramic adjustment** 



Material of grid





78 mm

78 1 mm

















Optional

Models with 10x10 grid - Dry























#### Maximum flow rate




**Base diameter outlet** 



**Base rotation** 







78 mm











Optional







Grid design







Handicapped accessible



Fine output adjustment



**Ceramic adjustment** 

AISI 304

Material of grid



**Confluo Primo** models are a line of products specially made for mass distribution in DIYs and hardware shops all around the world. All the parts are coming in transparent blister packing and this is our line which fits most property common situations in the bathroom making it perfect for the customers who want good relation between design, price, and quality.

### Confluo **Primo**

#### Main advantages:

- Minimum installation height 52 mm
- Maximum flow rate 48 l/min
- Reversible grid 2 in 1 system
- 360° rotable self-cleaning S base
- MAPEI waterproofing

Dimensions: 450, 550, 650, 750, 850 mm

#### **Grid Design**









#### CONFLUO COMPACT LINE PRIMO







#### Maximum flow rate

2 in 1 system

2 in 1 system



#### Self-cleaning base



#### Load class of grid



#### **Base diameter outlet**



#### Base rotation



Water seal height

AISI 304

Material of grid





#### CONFLUO COMPACT LINE BLACK MATTE PRIMO

Compact BM **450** Primo

Compact BM 550 Primo

Compact BM **650** Primo

Compact BM **750** Primo

Compact BM **850** Primo





#### Min. installation height



Maximum flow rate



2 in 1 system



Self-cleaning base



Load class of grid



**Base diameter outlet** 



Base rotation



Water seal height



Material of grid



#### CONFLUO PRIMO LINE

Primo **450** Primo **550** Primo **650** Primo **750** Primo **850** 



**MAPEI** 



#### Min. installation height



Maximum flow rate



2 in 1 system



#### Self-cleaning base



#### Load class of grid



#### Base diameter outlet



Base rotation



Water seal height

5. Grid for hair 7. Grid

8. Mapei waterproofing butyl tape

AISI 304

Material of grid



### Primo **Square** drains

#### Main advantages:


- Minimum installation height 47-82 mm
- High flow rate
- Cost effective
- Easy to install product

#### **Grid finish**

STAINLESS STEEL

PLASTIC



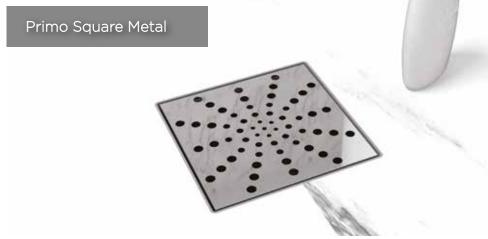





#### Primo **Square** drains

Models for bathroom 15x15 grid



Primo Uno Vertical

Ø50 output

output



Primo Uno Horizontal



Ø75 output



Primo Square Metal Vertical Primo Square Metal Horizontal

Ø50

Ø75 output



Ø75 output Models for garage 20x20 and 25x25 grid



Primo Square Plastic Vertical Primo Square Plastic Horizontal

Ø50 output

output



Ø75 output



Primo Round Plastic Vertical

Ø110 output

## Confluo **POS Displays**



Confluo Big Display



Confluo Combo Display



## Confluo Webshop Packages

Listening to the needs of our associates, online shop owners, we have created webshop packages with the complete content needed to implement the Confluo range in any online store.

Webshop packages include:

- Photos of installed drains,
- Photographs and rendering of products and all drain elements,
- Text descriptions,
- Technical drawings and technical specifications for all products in the assortment.



Scan QR code for more info and download Confluo webshop packages.



### **ADAPTERS**



USA 2" vertical adapter for American plumbing p-trap systems made of ABS and PVC.



MENA DN 90, 75, 63, 50, 40 mm vertical adapter made of PP for plumbing systems with siphon in dropped ceiling.



MENA DN 50 MM VERTICAL ADAPTER



Mena DN 100 mm adapter



Horizontal S base 5 cm water seal as per EN 1253




PVC DN 50 mm to 2" REDUCER. Reducer between DIN and BS piping systems.



5 cm water seal adapter as per EN 1253

#### Compatibility of adapters with Confluo models:

	Confluo Premium Line	Confluo Compact Premium	Confluo Frameless Line	Confluo Slim Line	Confluo Wall Drain	Confluo Standard	Confluo Compact Primo
1.	√	<b>√</b>	<b>√</b>	<b>√</b>	>		√
2.	√	√	<b>√</b>	<b>√</b>	<b>√</b>	<b>√</b>	<b>√</b>
3.	√	√	√	√	√		√
4.	√	√	√	√	<b>~</b>		√
5.	√	√	√	√	<b>~</b>		√
6.	√	√	<b>√</b>	√	<b>√</b>	<b>√</b>	√
7.	√	√	√			√	√

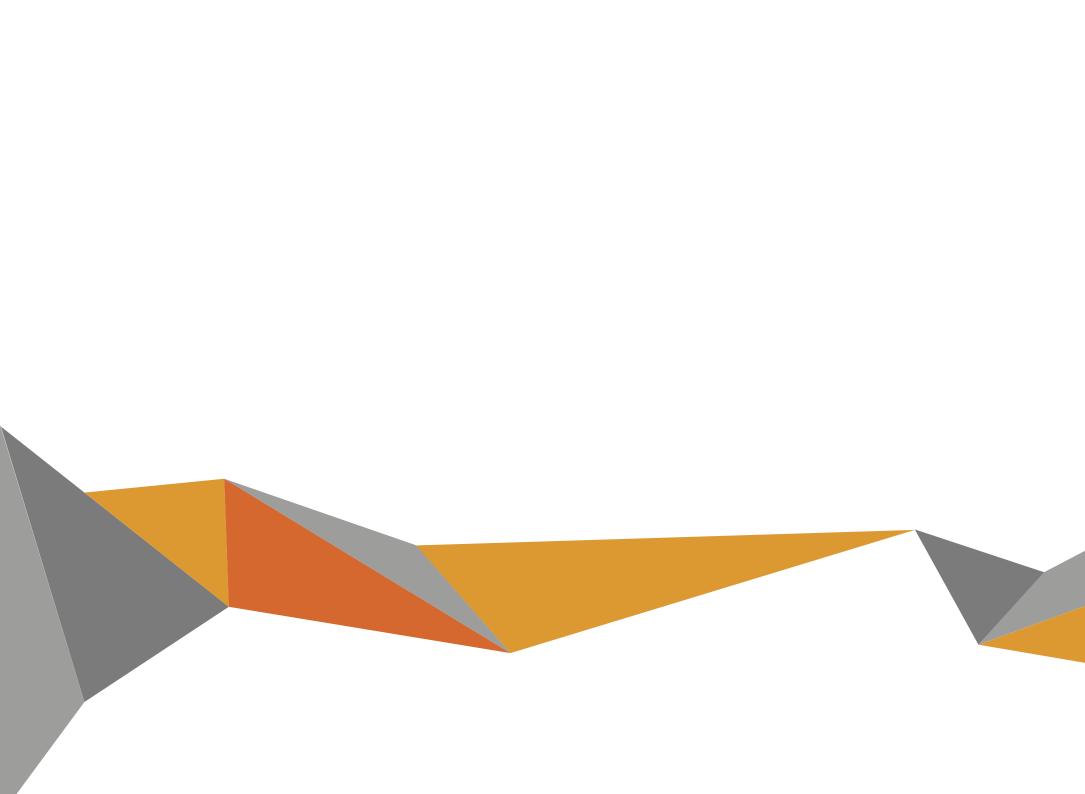

Fluenta



# Fluenta Concealed Flushing Cistern

#### Main advantages:

- $\bullet$  Powder-coated metal construction, square profile 40 x 40 mm with pre-assembled concealed flushing cistern
- Frontal dual flushing (3-6 | default, 4,5-9 | optional)
- Adjustable flushing volume (maximum quantity of water 6-9 I, a minimum quantity of water 3-4,5 I)
- Pre-assembled wall brackets and adjustable support legs (0-200 mm)
- Water connection possibility in two positions
- Fully insulated against condensation
- Silent mechanical filling valve (noise emission class 1 ISO 3822)
- Depth adjustable drain elbow (+/- 10 mm)



#### TO YEAR

10 year guarantee



25 year guarantee on spare parts



400 kg load capacity



Low noise



Easy to maintain



**Dual flush** 



Tested 200.000 times

#### Tehnical information

#### Installation method


- Installation in prefabricated walls, pre-wall installation in dry walls, universal installation into solid walls
- Corner installation

#### The product contains

- Concealed flushing cistern with a pre-mounted angle valve
- Water connection 1/2"
- PE wall drain elbow Ø90/110 mm with a seal
- All parts required for mounting and fixing of the product

#### Packaging

• Pallet: 24 pcs







# Fluenta Flushing Plates





# Fluenta Fit Concealed Flushing Cistern

#### Main advantages:

- Installation depth 80 mm;
- Supporting frame tested according NF Standards (XP D12-208), tested at 400 kg, cataphoresis application against corrosion, 200 hours of resistance to salt spray, with adjustable feet;
- Dual flush volume adjustable; small quantity: 2,5 4/big quantity: 3 6 L;
- Styrofoam insulation aganist condensation;
- Silent hydraulic fill valve Class II, EN 14124;
- Each cistern is tested individually in the works;
- Pre-assembled discharge elbow Ø90 mm with reducer Ø110 mm or Ø100 mm;
- Clip-on collar to simplify the attachment of the pipe to the frame;
- Inculding connecting sleeves for pan inlet and outlet with protective caps, built-in protection box for mortar, fixing materials.



#### Tehnical information

#### Installation method


• Installation in prefabricated walls, pre-wall installation in dry walls, universal installation into solid walls.

#### The product contains:

- Concealed flushing cistern with a pre-mounted angle valve;
- Water connection 1/2";
- PE wall drain elbow Ø90/110 mm with a seal;
- All parts required for mounting and fixing of the product.

#### Packaging:

• Pallet: 24 pcs







5 year guarantee



400 kg load capacity



80 mm ultra thin



Low noise







Dual flush



# Fluenta Fit Flushing Plates

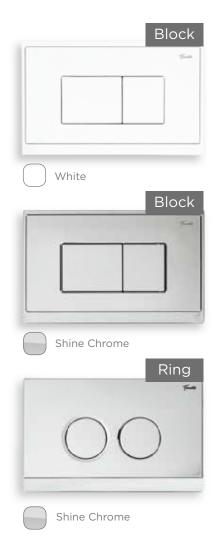

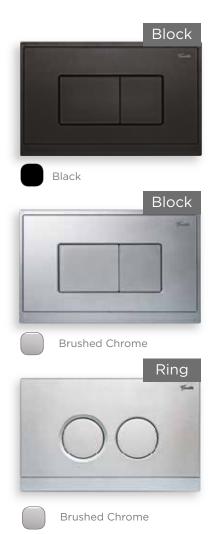






## Fluenta **Bidet** concealed element

#### Installation method:

- Installation in both solid and drywalls
- Concealed element height: 115 cm
- Concealed element width: 50 cm
- For installation of wall-hung bidet with an axial distance of 18 or 23 cm
- $\bullet$  Supporting frame made from 40  $\times$  40 mm profiles, surface protected with powder coating
- Support legs ranging from 0 to 24 cm
- Range of brackets for pre-wall installation: from 12 to 20 cm

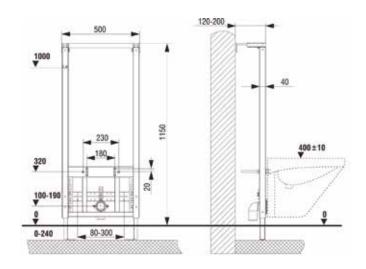





# Fluenta **Rimless**Wall Hung Toilet Bowl

#### Main advantages:

- Ultra-thin duroplast soft close toilet seat is included;
- Rimless flushing technology completely disables retention of bacteria and impurities below the inner edge;
- Mounting set for easy installation is included;
- No visible syphon and mounting parts.

Dimensions: L 555 mm, W 370 mm, H 354 mm



#### Fluenta **Rimless** Wall Hung Toilet Bowl

#### Elegance


Elegant design with modern shape and reduced lines, without visible mounting parts, will fit ideally into your modern bathroom


#### Easy maintenance and cleaning

Innovative rimless toilet bowl flushing technology completely disables retention of bacteria and impurities below inner edges.

#### Ultra slim "soft close" toilet seat

With modern and elegant design, Fluenta toilet seat have "soft close" mechanism, which prevents fast closing, noise, impacts or injuries.

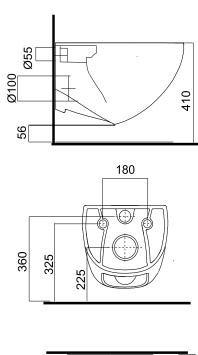






# Fluenta **Basic**Wall Hung Toilet Bowl

**Fluenta Basic** console toilet bowl perfectly fits with its simple design to the Fluenta concealed flushing cisterns and together they make an elegant and functional solution. It is made of a material with exceptional strength, resistant to damage, and easy to clean. Fluenta Basic toilet bowl is available with Classic or Click toilet seat. The Classic toilet seat has a soft-close mechanism for the slow lowering of the hoop and toilet seat without user intervention. The Click toilet seat has a soft-close mechanism for slow lowering and a button that allows easy removal of the toilet seat when you need to clean it.

Both these variants are made of the same material and have exceptional performance in terms of quality, design, and aesthetics. These products are delivered with all elements for quick and easy installation.





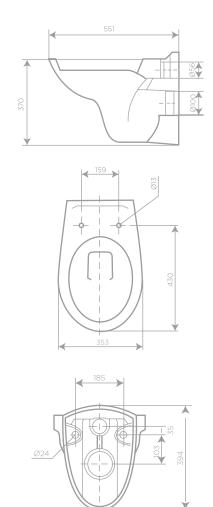



# Fluenta **Surface-mounted** Washbasin

#### Main advantages:

- Scratch resistance surface
- Glossy finish
- Slim design
- No-Spill function







### Fluenta **Round** Washbasin


Dimensions: L 615 mm, W 360 mm, H 115 mm

### Fluenta **Round mini** Washbasin

Dimensions: L 500 mm, W 360 mm, H 115 mm










### Fluenta **Spot** Washbasin

Dimensions: Ø380 mm, H 115 mm



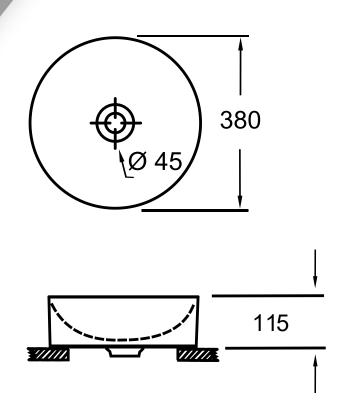

# CONTENT

03	WE ARE	71	CONFLUO STANDARD ANGLE	
07	BATHROOM SOLUTIONS	73	CONFLUO PRIMO LINE MODELS BENEFITS	
09	CONFLUO	75	CONFLUO COMPACT LINE PRIMO	
10	ICONS	77	CONFLUO COMPACT LINE BLACK MATTE PRIMO	
11	CONFLUO MODELS	79	CONFLUO PRIMO LINE	
13	ULTRA LOW S BASE	81	PRIMO SQUARE DRAINS	
15	CONFLUO PREMIUM LINE	84	POS DISPLAYS	
23	CONFLUO COMPACT LINE PREMIUM	85	WEBSHOP	
31	ANTI-LEAKING SYSTEM	87	ADAPTERS	
33	CONFLUO FRAMELESS LINE	89	FLUENTA	
43	CONFLUO SLIM LINE	91	FLUENTA CONCEALED FLUSHING CISTERN	
47	WALL DRAIN	95	FLUENTA FLUSHING PLATES	
53	CONFLUO BOARD	97	FLUENTA FIT CONCEALED FLUSHING CISTERN	
59	CONFLUO STANDARD	101	FLUENTA FIT FLUSHING PLATES	
63	CONFLUO STANDARD WITH METAL GRID	103	FLUENTA BIDET CONCEALED ELEMENT	
65	CONFLUO STANDARD GLASS	105	FLUENTA RIMLESS WALL HUNG TOILET BOWL	
67	CONFLUO STANDARD CERAMIC	109	FLUENTA BASIC WALL HUNG TOILET BOWL	
69	CONFLUO STANDARD PLATE 2 IN 1	111	FLUENTA SURFACE-MOUNTED WASHBASIN	

## BRAND MANIFESTO

We are not oriented just to production, we combine reliability with quality for the ultimate benefit of our clients.

We do not build short-term client relationships, but long-term and genuine partnerships.

Everything we do, we do with one thing in mind - to create ideas to perfectly match all our client needs and the best way for us to achieve this goal is to constantly educate our clients provide solutions that meet their specific needs and support them throughout the entire process.

Because our success is as big as your trust in us.



+381 034 700 300 OFFICE@PESTAN.NET

PUT 1300 KAPLARA 188 ARANDJELOVAC 34300 SERBIA

WWW.PESTAN.NET