PEŠTAN

we build trust







bathroom solutions

WE ARE

The Pestan company is a leader in the Balkans in the production and distribution of polymer products and solutions. Our mission is to improve the quality of life with the help of reliable products and solutions since 1989. Today, over 8,500 products can be found in the offer, divided into two categories: pipe and bathroom solutions. We are present in over 80 countries of the world, through a global network of agents and distributors.

PIPING SOLUTIONS

BATHROOM SOLUTIONS

Jun 2024.

Production facilities of company Peštan are located in Arandjelovac, Serbia. Annual revenue exceeding 150 million €, which is realized with the help of 1.200 employees. Peštan has a direct presence, through its daughter companies, in Bosnia and Herzegovina, as well as in Romania and through its representative offices in Albania, Croatia and the United Arab Emirates. Peštan operates in more than 80 countries worldwide through a global network of agents and distributors. Primarily export-oriented, the company is present in the market of Europe, Russia, Middle East, North Africa, Latin America and the United States.

The entire production is adjusted to European standards which is proved by international certificates for quality products:

IGH, Bulgarkontrola, INSTA-CERT-DANCERT, MPA, DVGW, ITC, EBETAM, EMI, GOST, ICC, IAMPO, KIWA, SKZ, SPSC, VUPS, VUSAPL, BENOR, BELNIIS, HESSEL, TZW, FRAUNHOFER, CSI, MIRTEC and certificates of quality process ISO 9001, ISO 14001, ISO 45001, ISO/IEC 27001, ISO 50001. For maximum satisfaction of customer needs, the company is constantly innovating and improving personnel and equipment. Since 2009, the company introduced the SAP ERP modules MM, SD, PP, FI CO, and since 2012 have extended functionality and WMS was included. The introduction of WCM and WMS system has increased the efficiency, contributed to the allocation of costs and professional maintenance. Central warehouse is located in Serbia, Arandjelovac, which is sized and designed to meet the requirements of the most demanding customers who want efficient and reliable delivery of products.

To respond to these requirements, Peštan has 15.000 m^2 of closed storage space for finished and semi-finished products, 10.000 m^2 warehouse for raw materials and intermediate goods, and approximately 150.000 m^2 of open storage space. Our vision is to be recognized as a leader in the Balkans, which provides customers with diversified solutions and products in one place. Our mission is creating a competitive advantage in our customers' businesses with the help of first-class solutions, services and products. We provide our company's success by consistently meeting the needs of clients, stakeholders and employees.





KEY FACTS

80


AND MORE COUNTRIES WHERE WE EXPORT OUR PRODUCTS

8.500

DIFFERENT PRODUCTS IN OUR PRODUCTION ASSORTMENT

65.000

TONS OF MATERIAL PROCESSED ANNUALLY

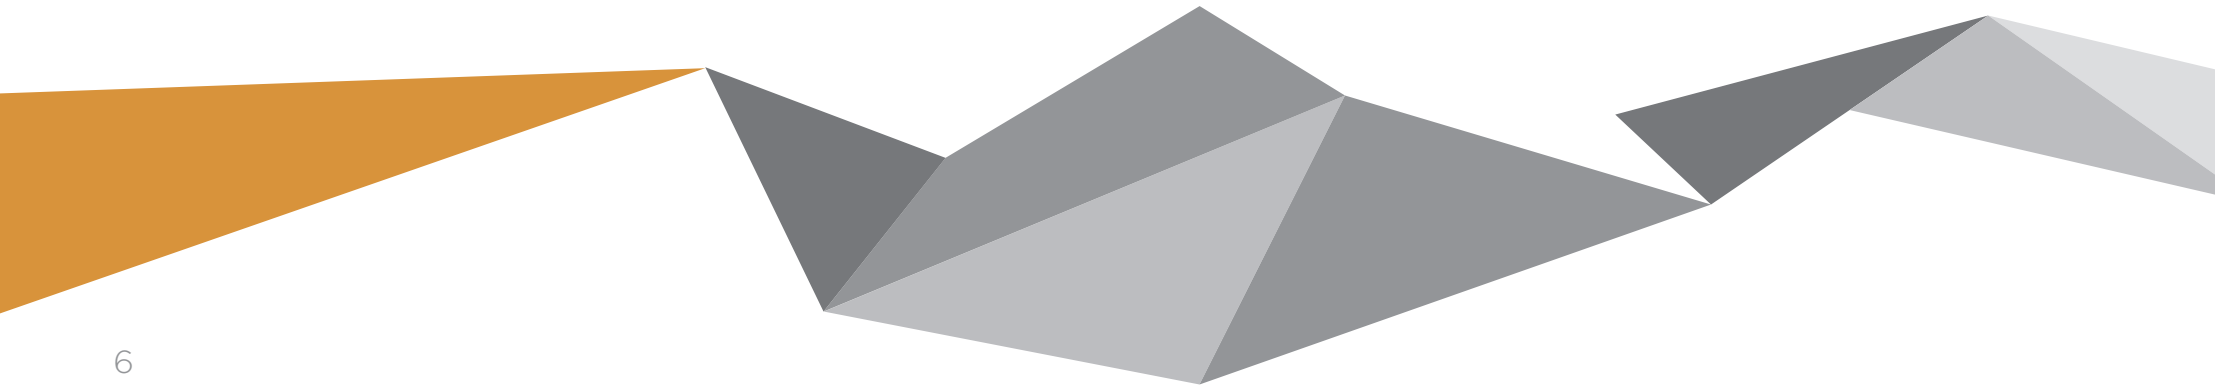

BATHROOM SOLUTIONS


Peštan bathroom solutions program contains 2 product groups under two brands: Confluo shower drains, Fluenta build-in cisterns, and Fluenta toilet bowls.

Confluo is a shower drain brand that has been recognizing Pešan company as a globally well-known drainage expert in the bathroom industry for a long time.

Fluenta build-in cistern and toilet bowls are the newest product in our bathroom portfolio and represent our desire to offer complete and top quality solutions for the bathroom.

PEŠTAN CONFLUO SMART DRAINS

Fluenta

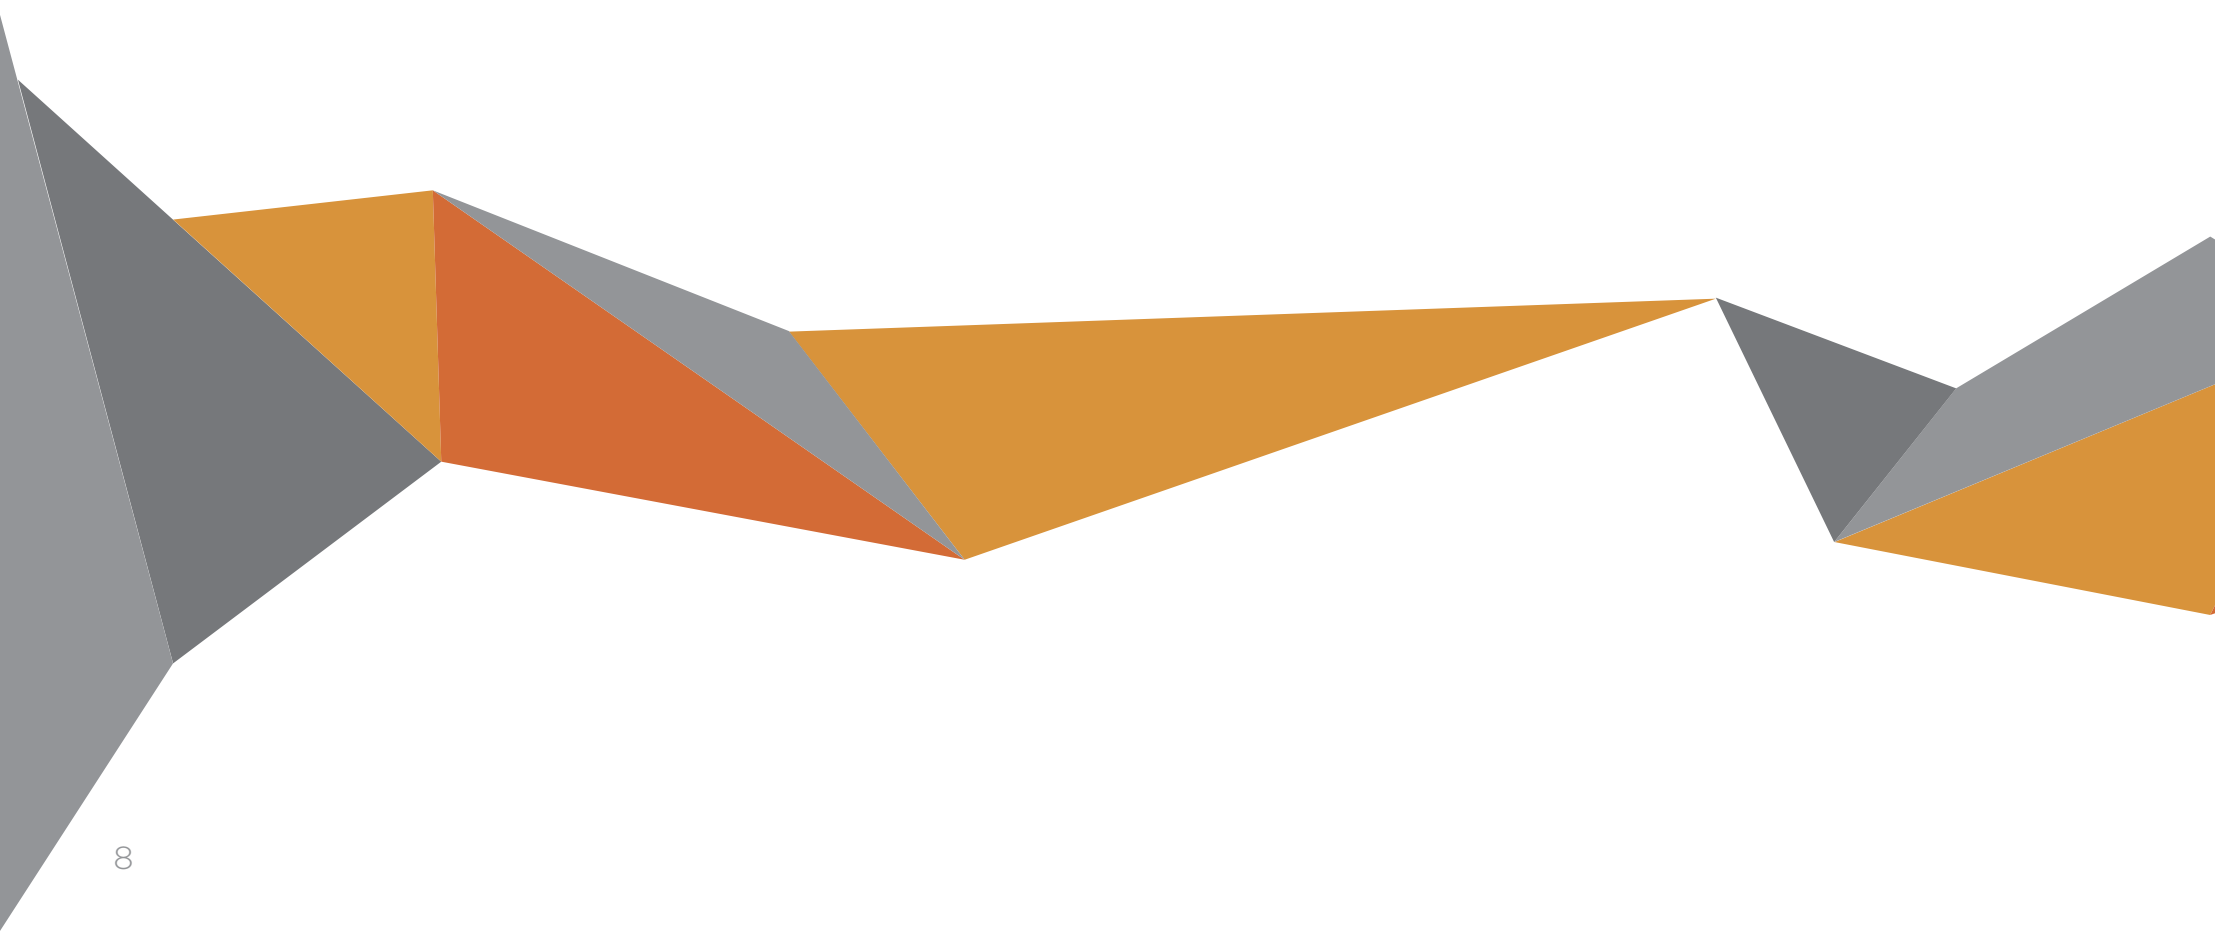

PEŠTAN

CONFLUO

SMART DRAINS

Confluo icons

1



Min. installation height

Minimal construction height of drain, from bottom of the base, up to the holder.

2



Base diameter outlet

Diameter of base outlet.

3



Maximum flow rate

Maximum flow rate with 20 mm threshold.


4



Base inlet diameter

Diameter of base intet.

5



Anti-leaking system

Anti-Leaking System represents combination of drain construction and proper installation which allows all leaked and condensated water to go back to drain.

6



2 in 1 system

Grid of drain can be turned and used both for stainles steel/gold and ceramic/glass finish.


7



Base rotation

Base of drain can be rotated 360°

8



Fine output adjustment

Output of drain can be adjusted by 15°.

9



Water seal height

10



Fine ceramic adjustment

Model have system for ceramic height leveling, so clients have flexibility in choosing surface in bathroom.

11



Self-cleaning base

The output of drain is constructer in a way that whatever goes through the grid for hair will also go trough output for sure, and then through the sewage system.

12



Handicapped accessible

Easy access to the shower.

13



Material of grid

Grid is made of stainless steel AISI 304. Optionaly, we can procuce grid from stainless steel AISI 316.

14



Load class of grid

Grid is classified as K3, which means that it can withstand 300 kg of pressure.

15



Ceramic adjustment

Unlimited ceramic height leveling.


Confluo Linear drains

We produce our Confluo Linear drains in 4 different models (Premium Line, Compact Line, Slim Line and Frameless Line), 9 different sizes (300, 450, 550, 650, 750, 850 and 950 mm) and 4 different grid finishes (Stainless Steel, Black Matte, Glass and Gold). All models, except Slim, have 2 in 1 system where the same model can be used both with Stainless Steel/Gold and Tile/Glass finish and are characterized as ultra low 360 degrees rotable self-cleaning S base.



Confluo Wall drain

As Peštan Company always follows trends on world market, we have prepared for our customers the latest model in world of shower drains — Wall drain. This model represents innovation in industry and, besides its new and modern design, it is perfect model for renovations and bathrooms with concealed cisterns. Wall drain has body made of plastic and it is supplied with 2 different grids (Stainless Steel and Gold).

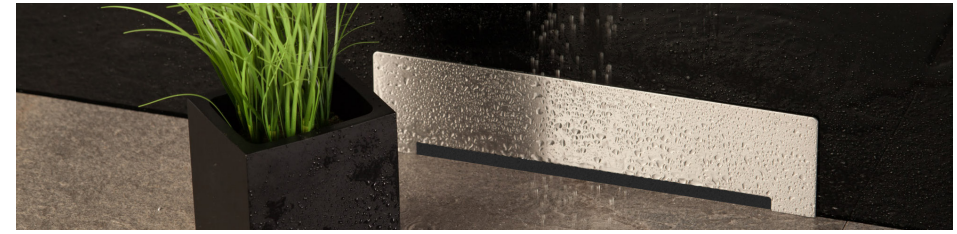

Confluo Board

Peštan "Board" program of preinstalled shower drains represents the result of constant searching for better and more efficient solutions for our customers worldwide. With this product, we made a big step ahead concerning waterproofing, safety and aesthetics, as we have minimized possibility of mistake and significantly reduced the time and effort for installation. With this product, as a producer, we have taken responsibility on our side and made modern, quality and time effective solutions for our clients.



Confluo Standard drains

Peštan Company offers to clients more than 150 different models of Confluo Standard drains. All models have body made of plastic and grid made of stainless steel, glass or gold, which we possess in various designs (Tide, Square, Drops, Plate 2 in 1, Black & White Glass, Ceramic and Gold) and sizes (10x10 cm, 15x15 cm and 20x20 cm). Main advantages are: Big variety of models, maximum flow rate, modular and flexible systems with 6 different outputs, 3 different types of siphons. You can make your own floor drain system easy for installation and maintenance.




360° rotation
Superior flow rate
DN 50 mm
1
2
3
4
5
50mm
40°
Ultra low
Acute angle of siphon
Self cleaning

Ultra low S base

Main advantages:

1. 360° rotation
2. Superior flow rate — 48 l/min
    - DN 50 mm output
3. Ultra low — 50 mm
4. Acute angle of siphon — 40°
5. Self-cleaning
    - Smooth plastic
    - Wide channel for water, without any obstacles



Confluo Premium Line is characterized with a 2 in 1 reversible grid system which enables you to change your bathroom design on daily basis with stainless steel/ceramic or black & white glass/stainless steel finish and decorative mask that covers all plastic parts. The model has a superior flow rate of 48 l/min and minimum installation height of only 52 mm, which makes our Confluo Premium Line the lowest drain in the world with DN 50 mm output and a perfect model for most demanding renovation projects.

Confluo
Premium Line

Main advantages:

- Minimum installation height — 52 mm
- Maximum flow rate — 48 l/min
- Reversible grid — 2 in 1 system
- 360° rotatable self-cleaning S base
- Without visible plastic parts

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm

Grid Design




Dry siphon for linear drains with O-Ring included for extra protection against bad smells and insects when water evaporate from S base.

* Not included in standard product. Needs to be ordered separately.



Confluo **Premium** Line

Premium **300** Premium **450** Premium **550** Premium **650** Premium **750** Premium **850** Premium **950**

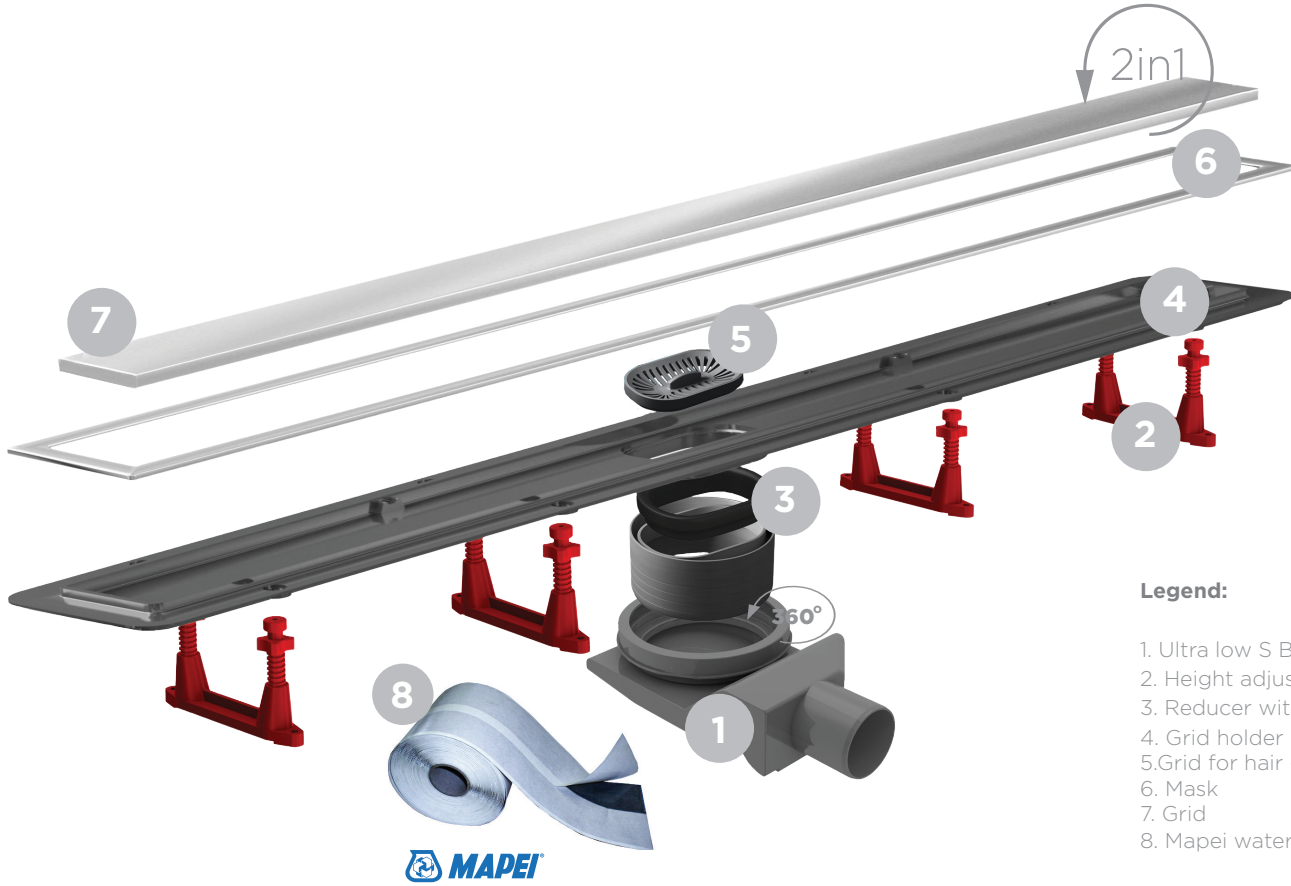

Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid holder
5. Grid for hair - flow rate 48 l/min
6. Mask
7. Grid
8. Mapei waterproofing butyl tape

52 mm
Min. installation height

48l/min
Maximum flow rate

2 in 1 system
2 in 1 system

SC
Self-cleaning base

K3
Load class of grid

∅ 50 output
Base diameter outlet


360° base rotation
Base rotation

25 mm
Water seal height

AISI 304
Material of grid




2 in 1 System & Grid design options

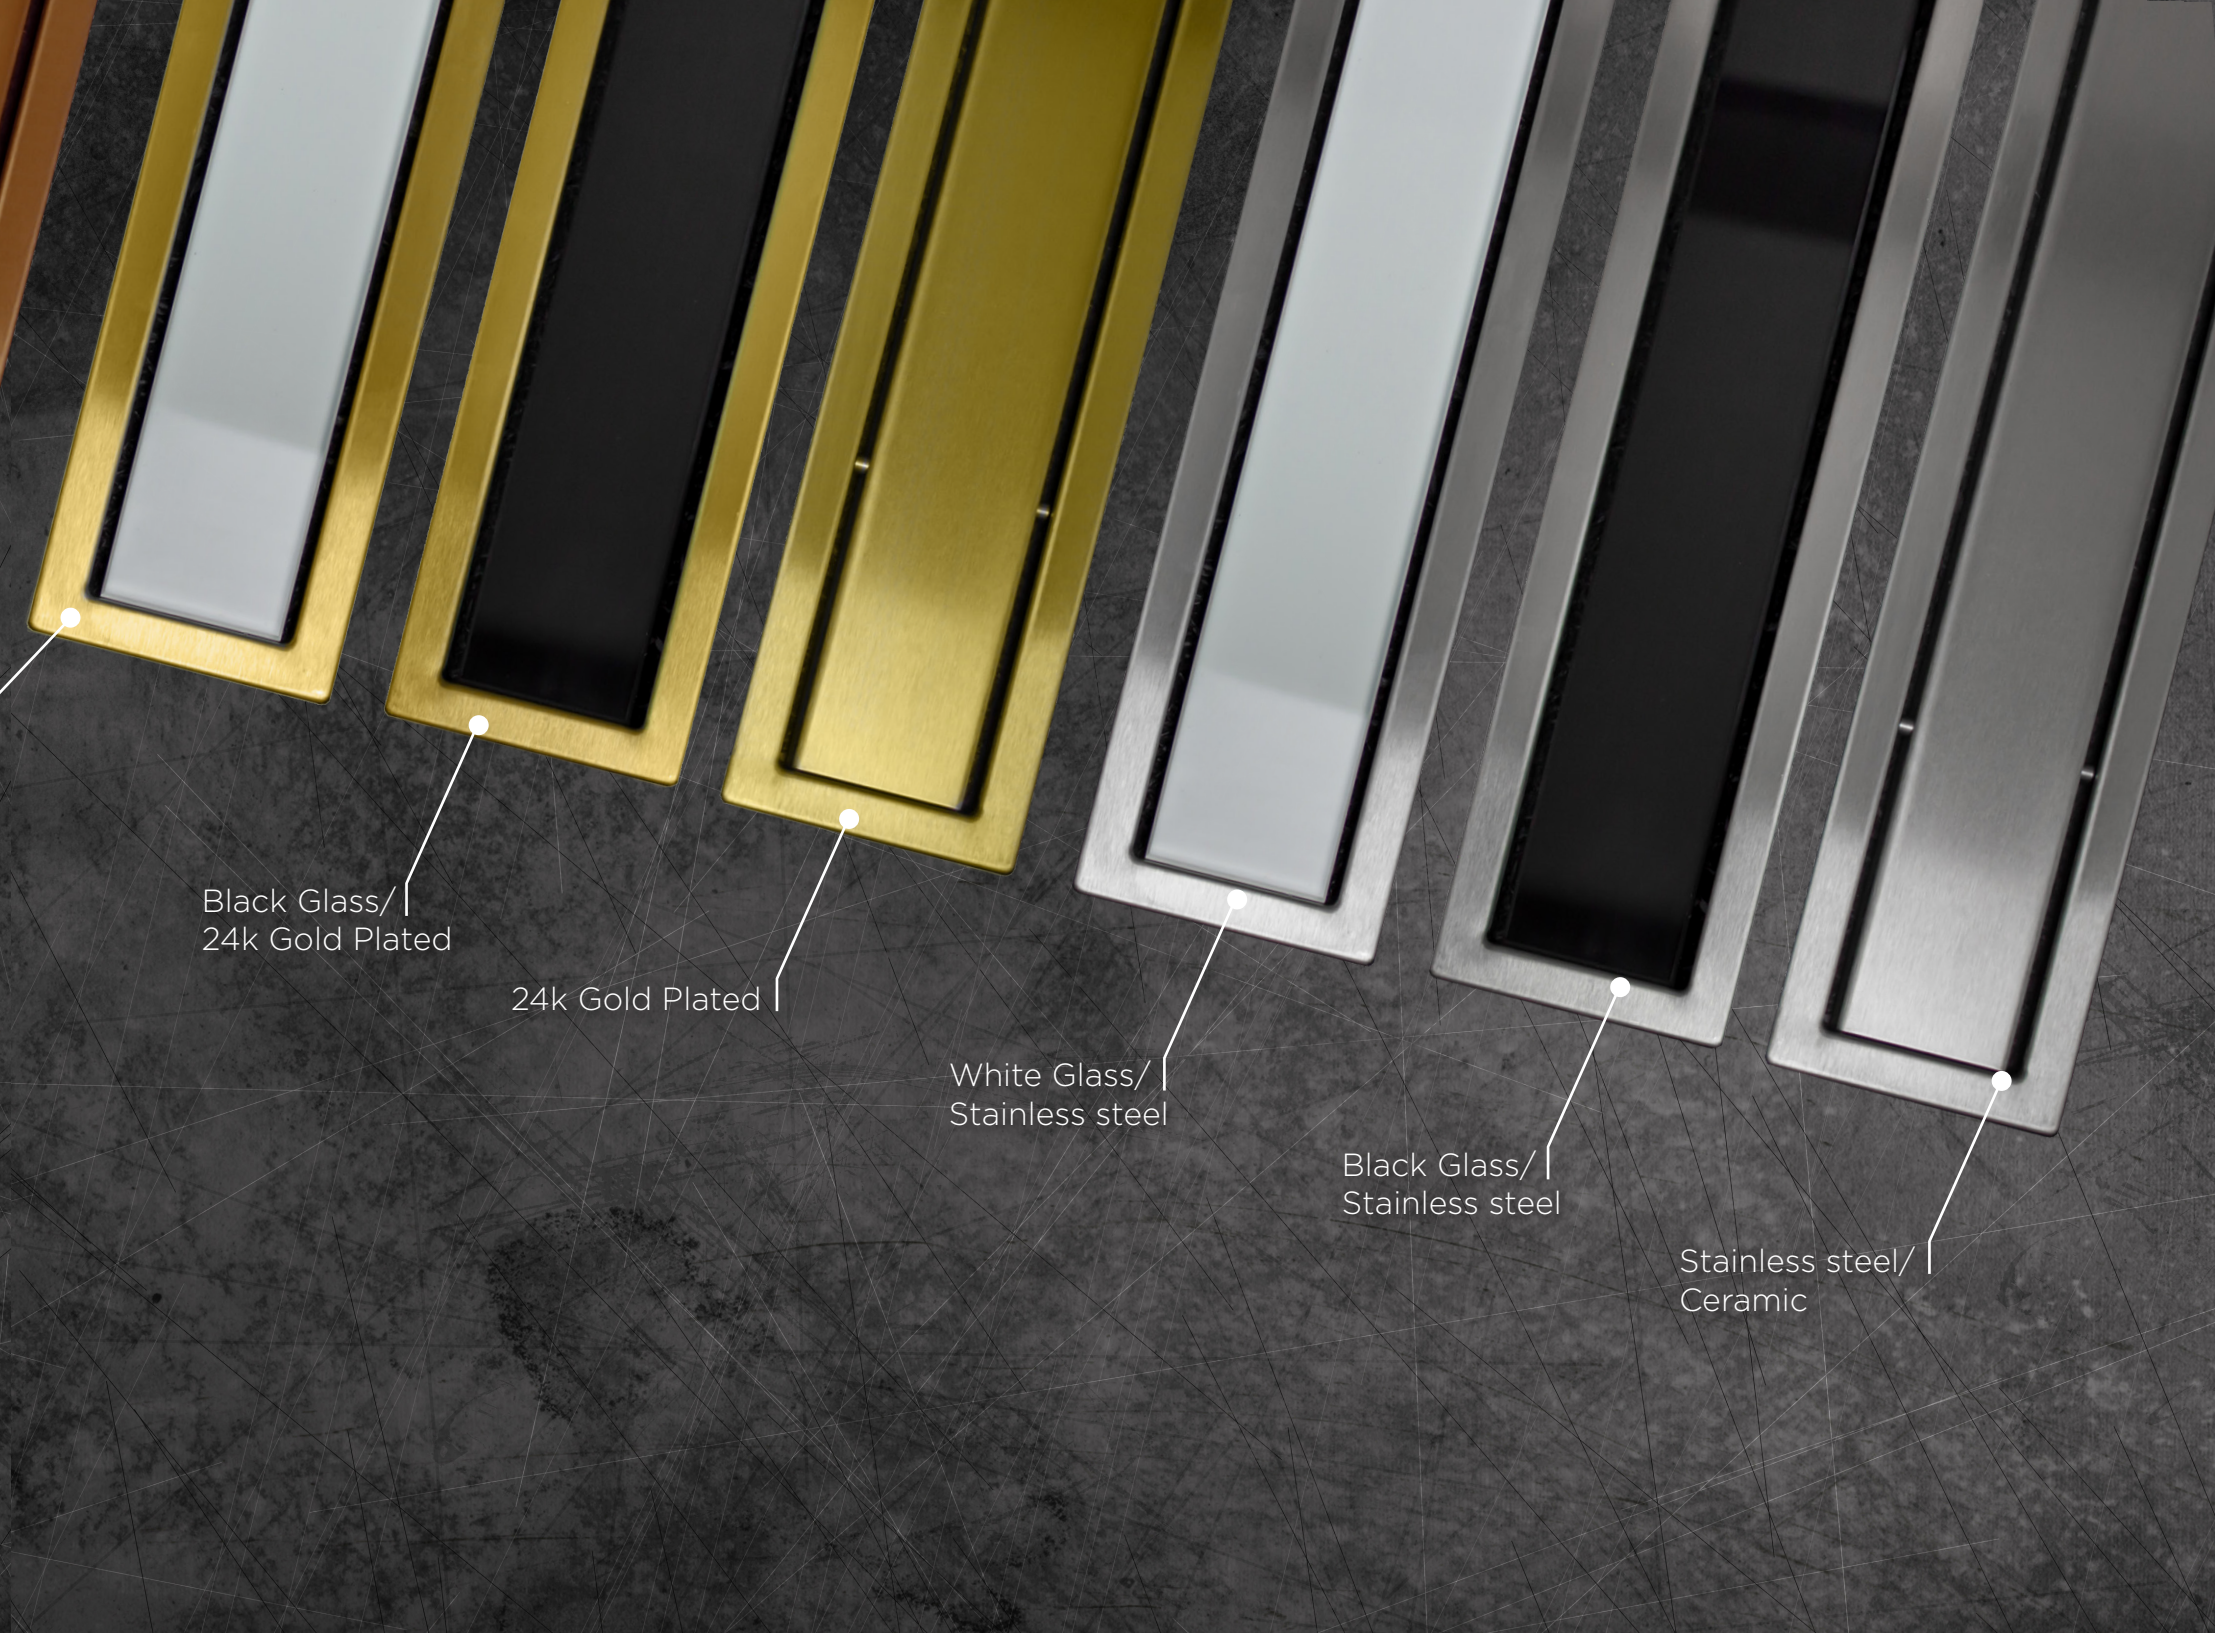
Black Glass/
24k Gold Plated
24k Gold Plated
White Glass/
Stainless steel
Black Glass/
Stainless steel
Stainless steel/
Ceramic





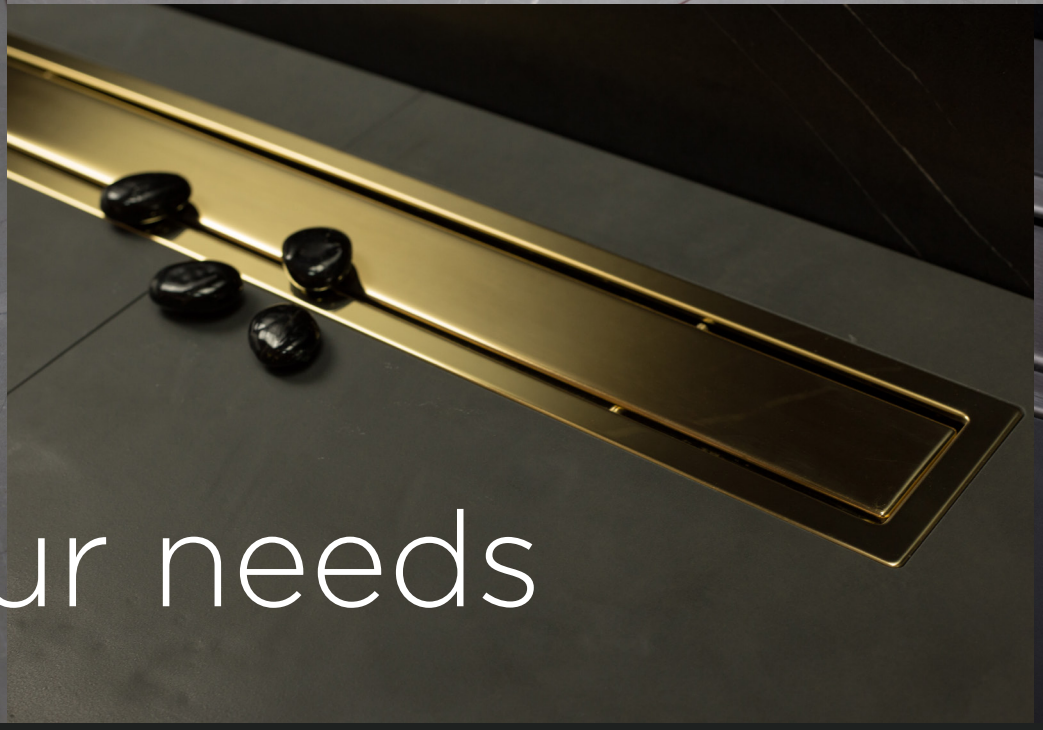





For all your needs



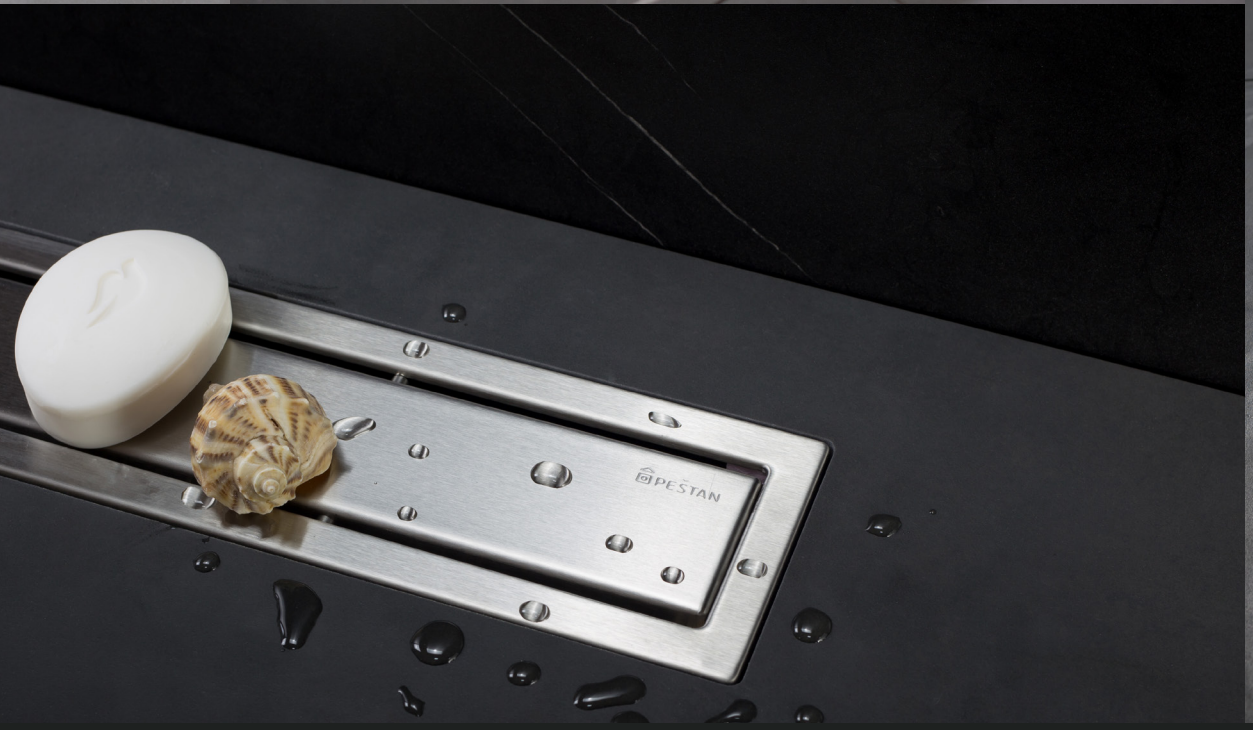


PESTAN



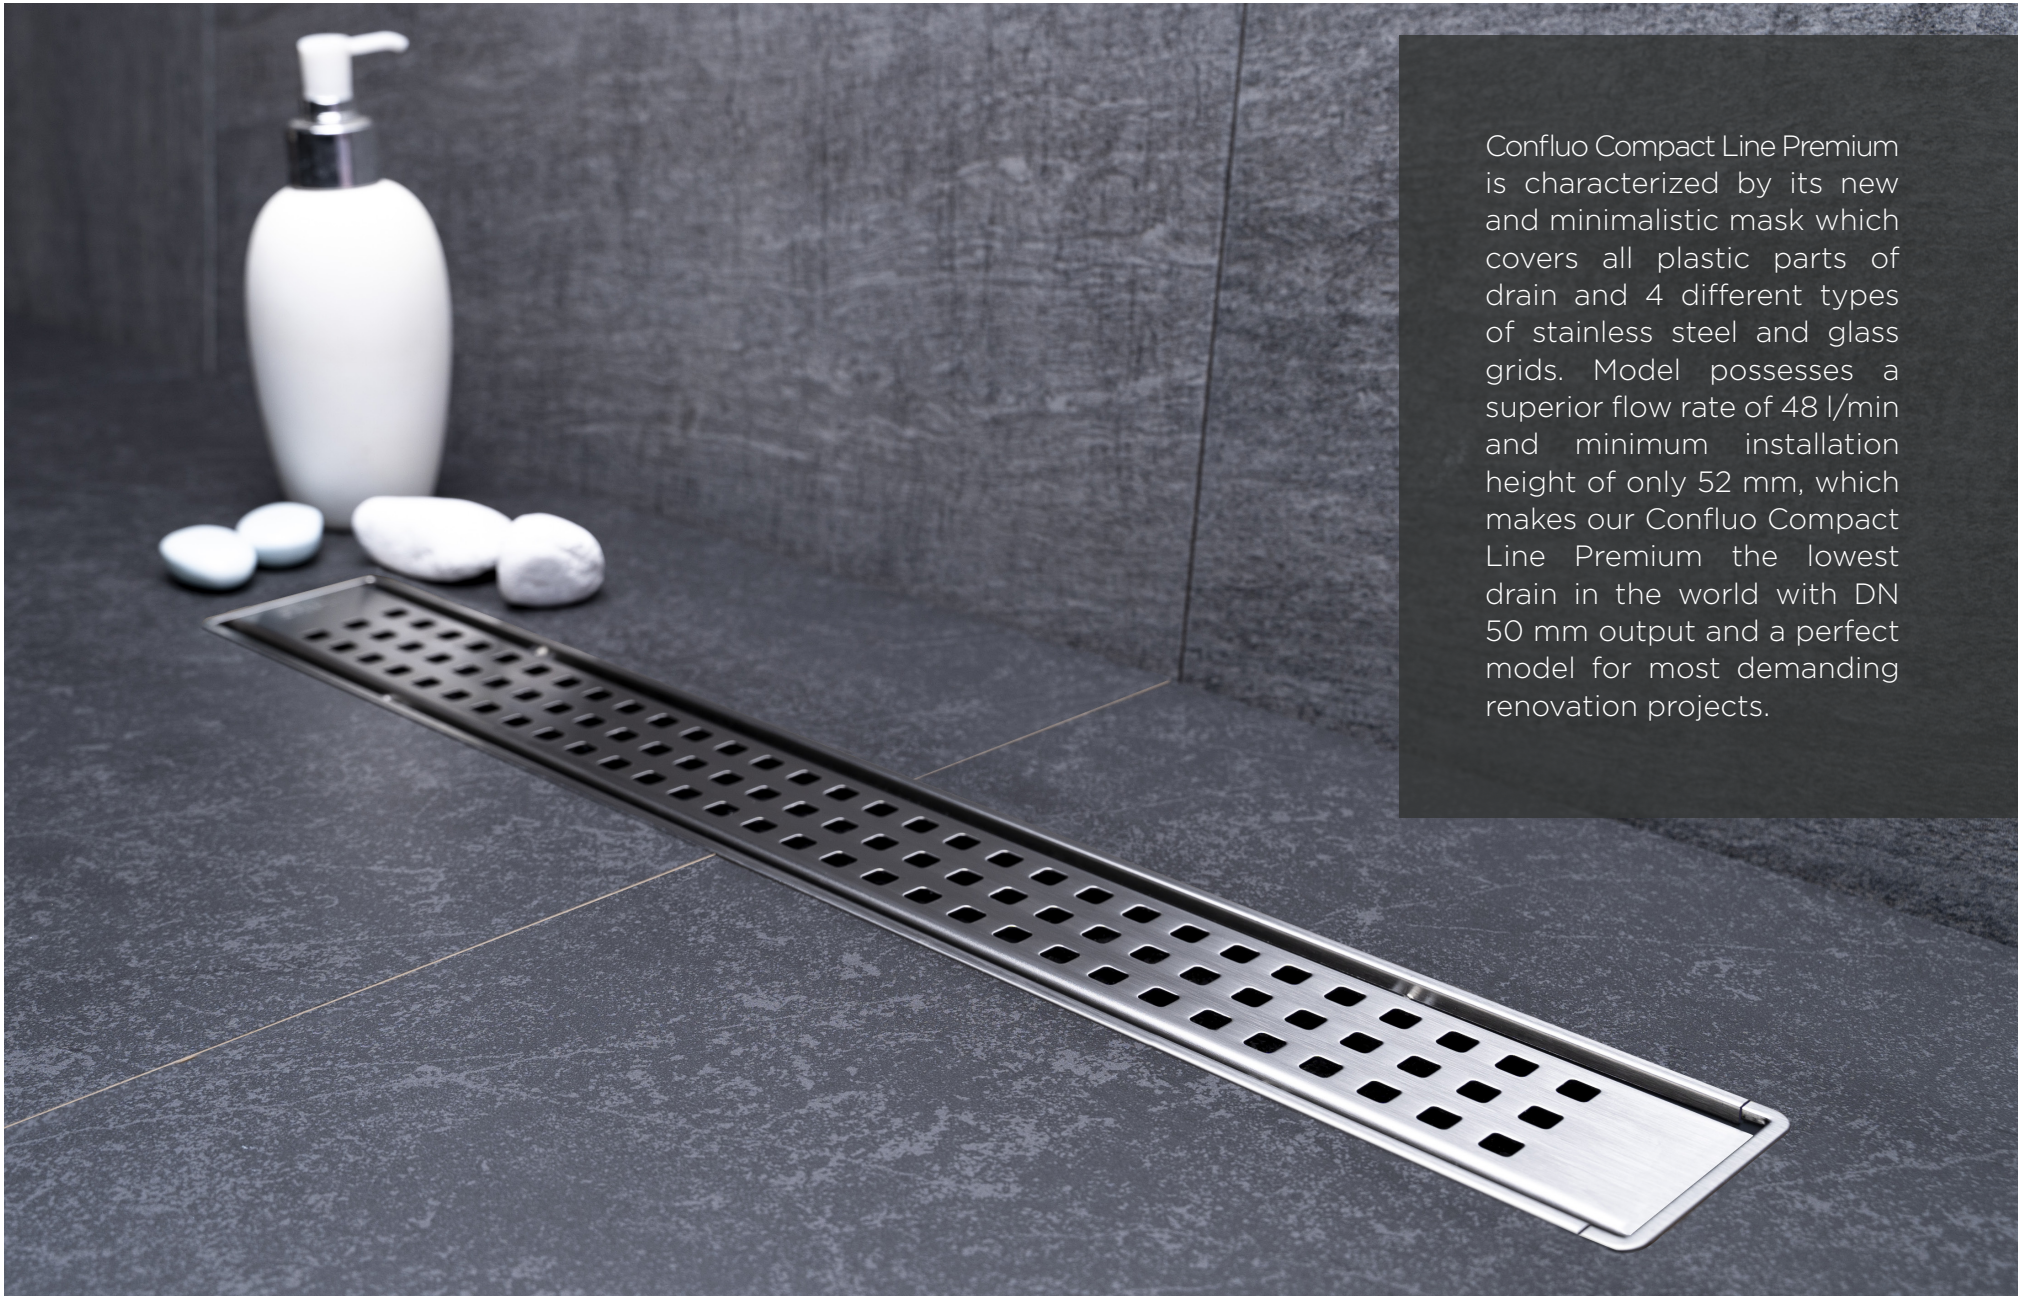

Confluo Compact Line Premium is characterized by its new and minimalistic mask which covers all plastic parts of drain and 4 different types of stainless steel and glass grids. Model possesses a superior flow rate of 48 l/min and minimum installation height of only 52 mm, which makes our Confluo Compact Line Premium the lowest drain in the world with DN 50 mm output and a perfect model for most demanding renovation projects.

Confluo
Compact Line Premium

Main advantages:

- Minimum installation height — 52 mm
- Maximum flow rate — 48 l/min
- Combined siphon — wet + dry
- Reversible grid — 2 in 1 system
- 360° rotatable self-cleaning S base
- Without visible plastic parts

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm

Grid Design




Dry siphon for linear drains with O-Ring included for extra protection against bad smells and insects when water evaporate from S base.



* Included in standard product.

CONFLUO **COMPACT NET** LINE PREMIUM

Compact Net Line **300** Premium | Compact Net Line **450** Premium | Compact Net Line **550** Premium | Compact Net Line **650** Premium | Compact Net Line **750** Premium | Compact Net Line **850** Premium | Compact Net Line **950** Premium

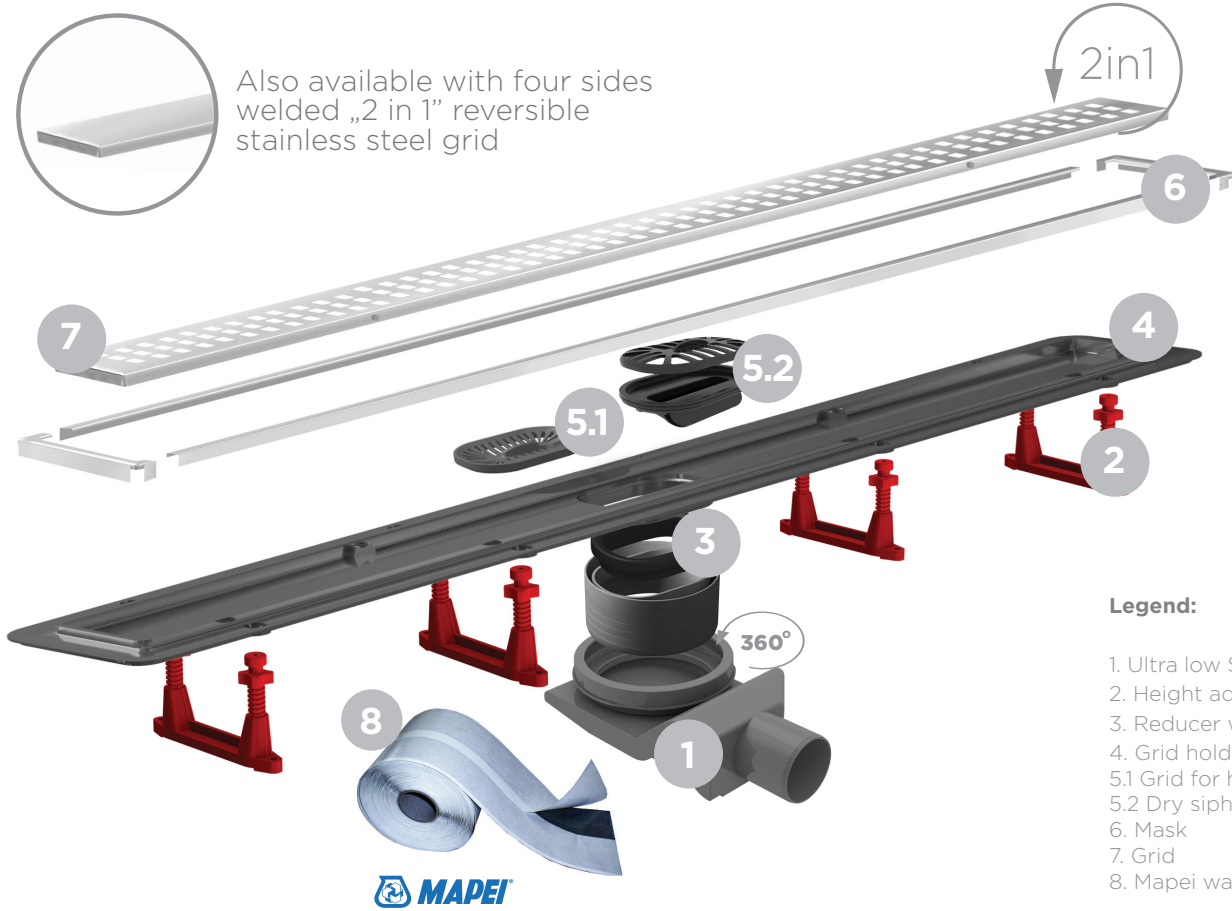

Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid holder

5.1 Grid for hair - flow rate 48 l/min
5.2 Dry siphon - flow rate 26 l/min

6. Mask
7. Grid
8. Mapei waterproofing butyl tape

52 mm
Min. installation height

48l/min
Maximum flow rate

2 in 1 system
2 in 1 system

SC
Self-cleaning base

K3
Load class of grid


∅ 50 output
Base diameter outlet

360° base rotation
Base rotation

25 mm
Water seal height

AISI 304
Material of grid


One product
Two designs

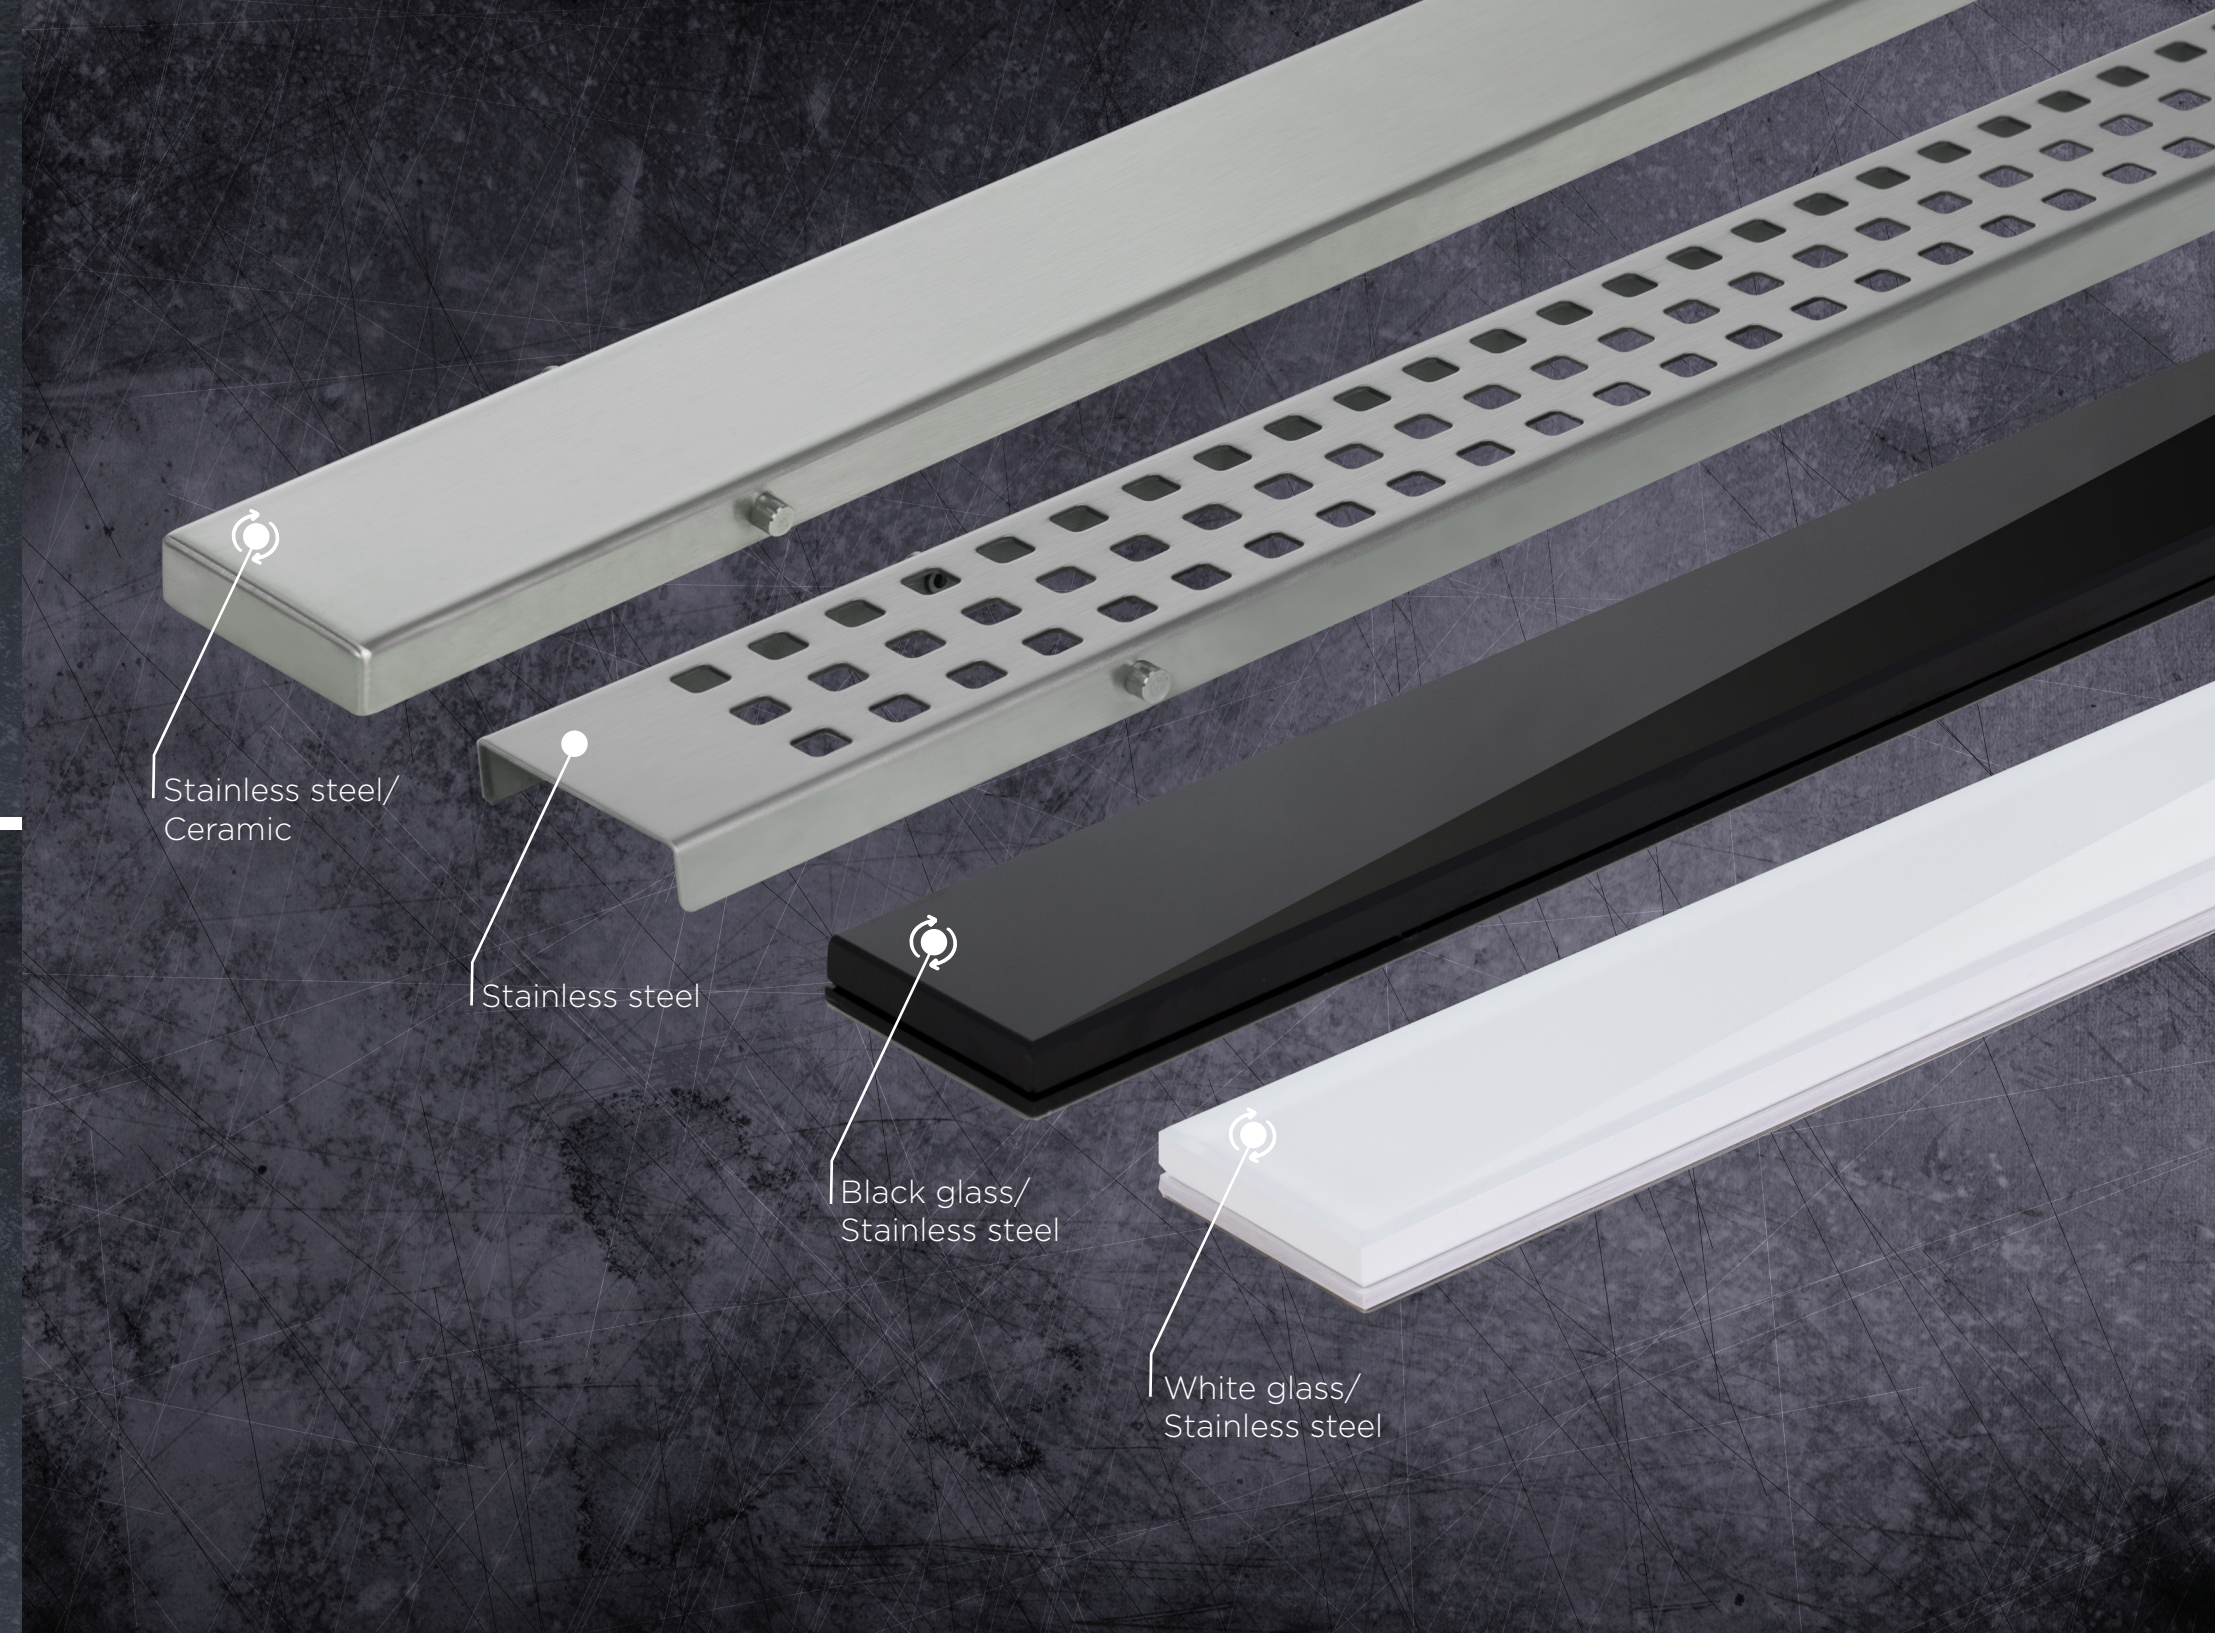
Stainless steel/
Ceramic
Stainless steel
Black glass/
Stainless steel
White glass/
Stainless steel



Confluo Compact Line Premium




Confluo Compact Line Black Glass Premium




Confluo Compact Net Line Premium




Confluo Compact Line White Glass Premium

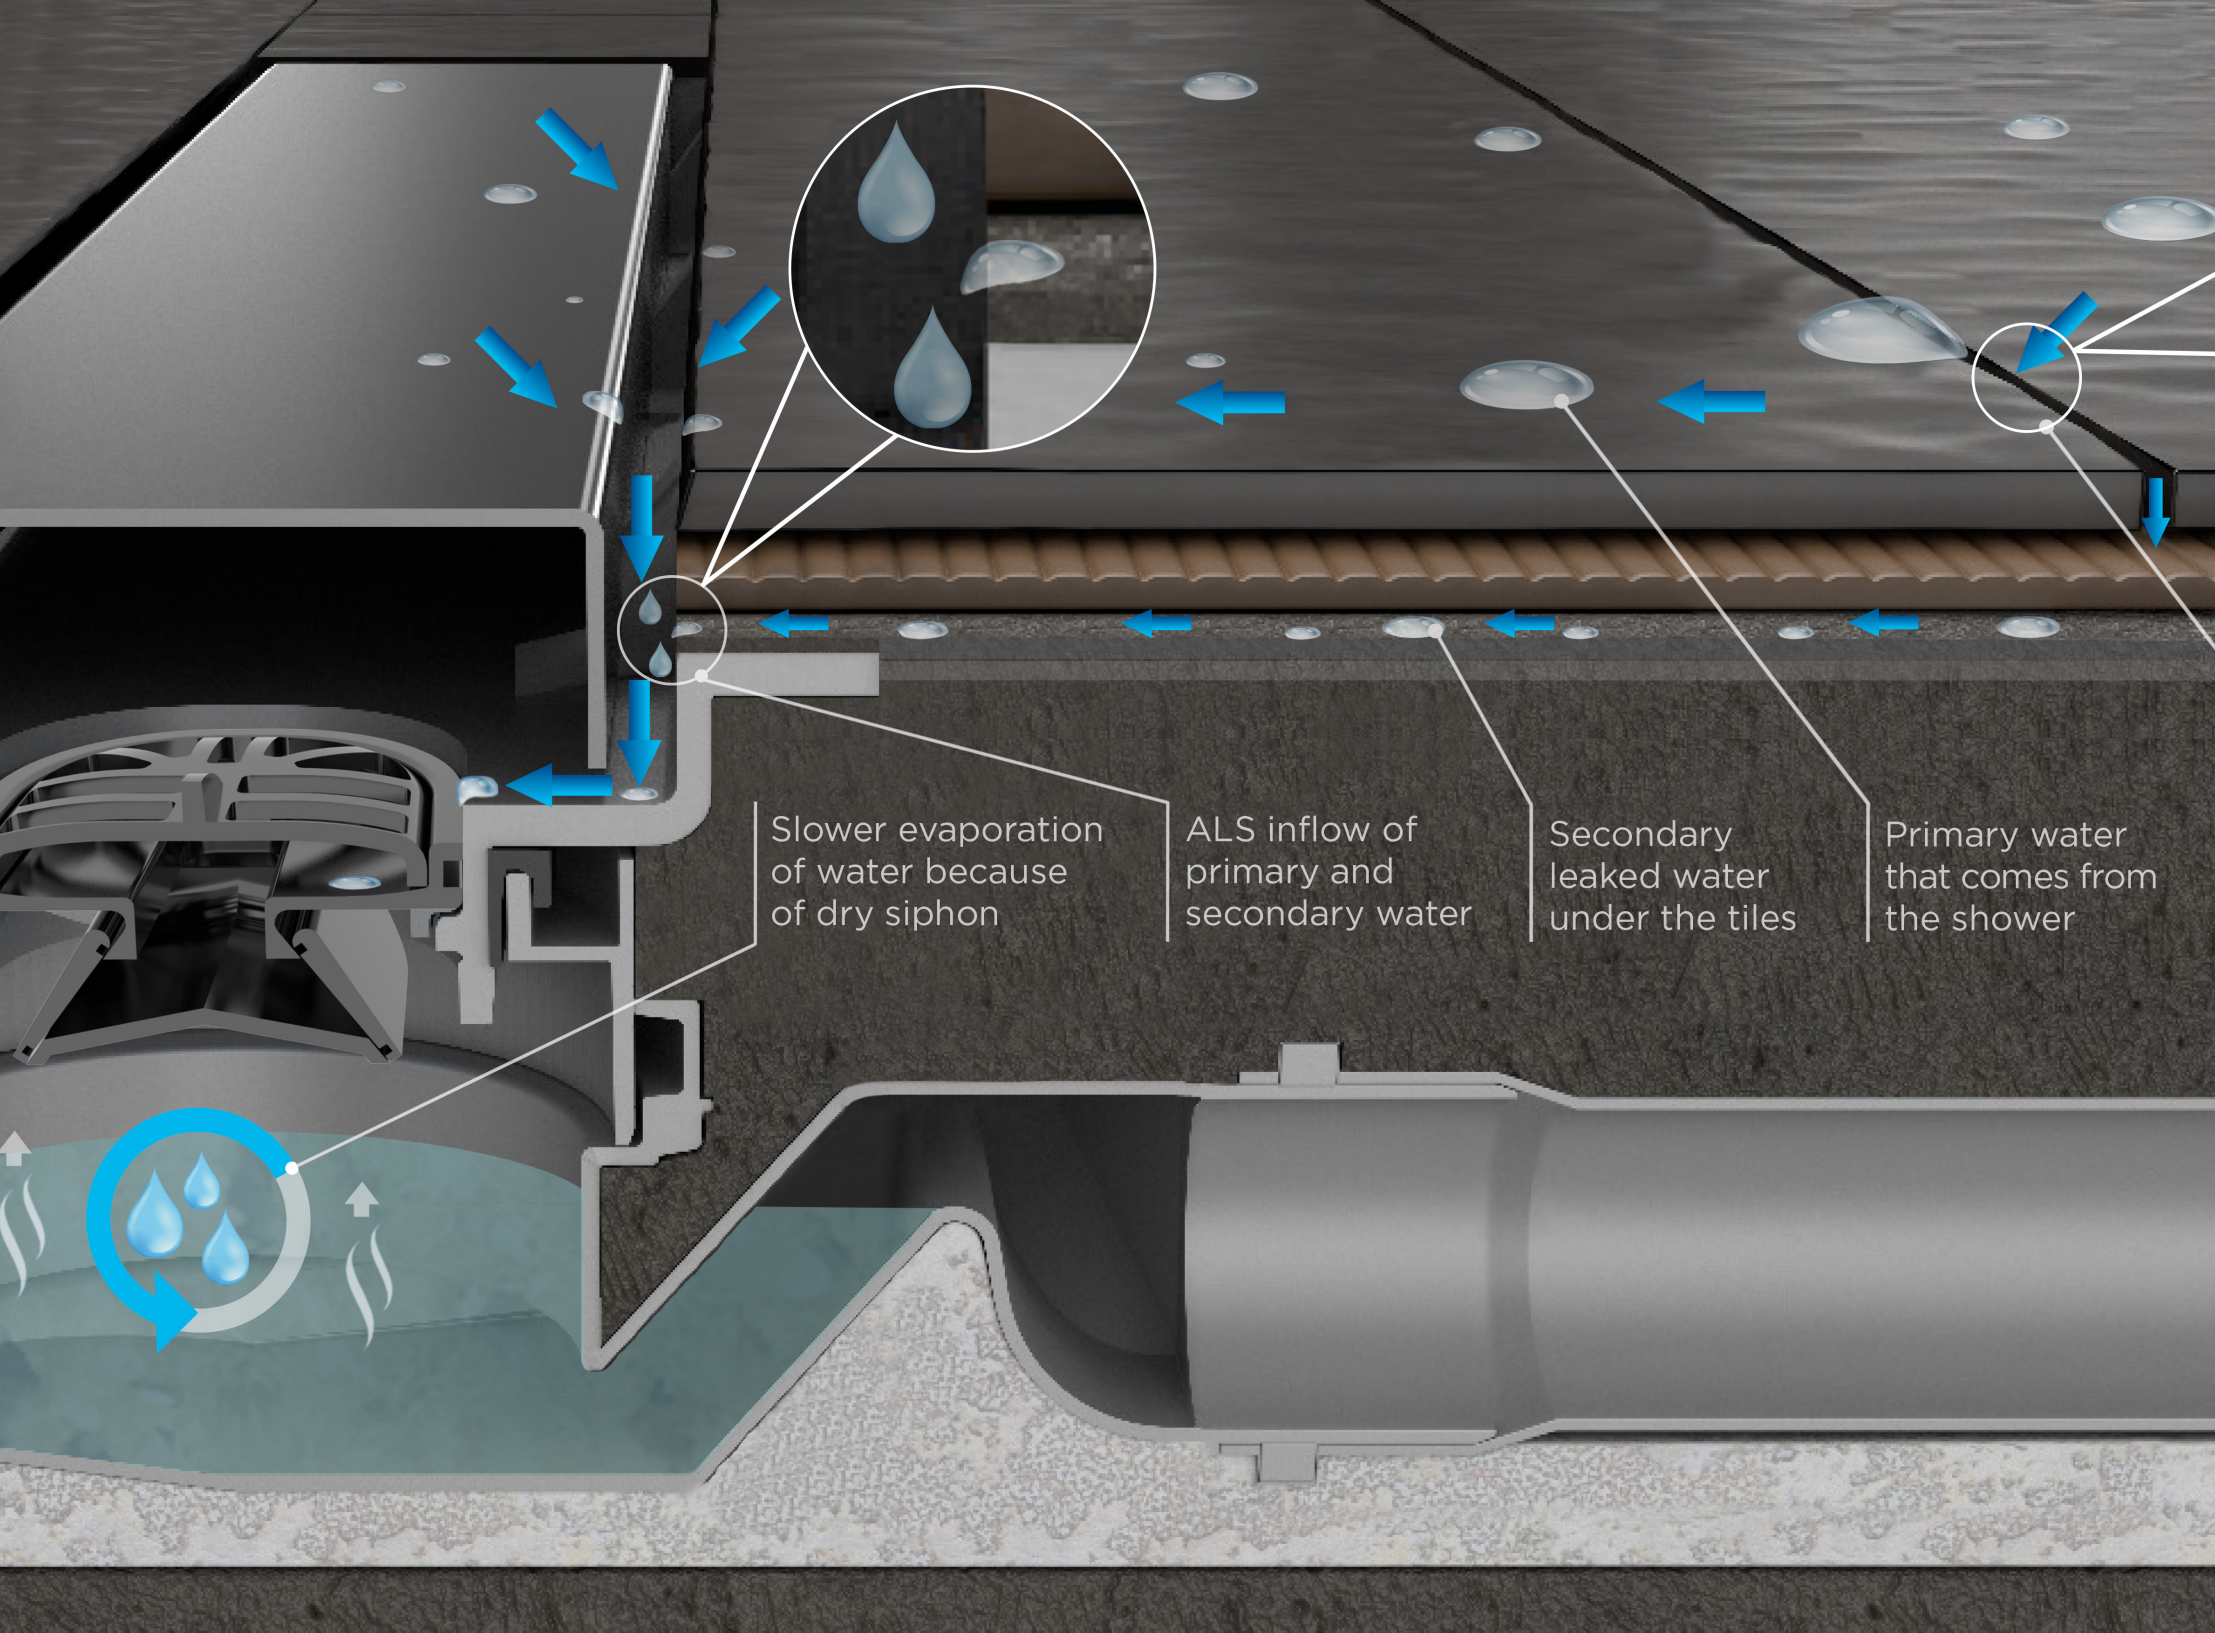
Slower evaporation of water because of dry siphon
ALS inflow of primary and secondary water
Secondary leaked water under the tiles
Primary water that comes from the shower

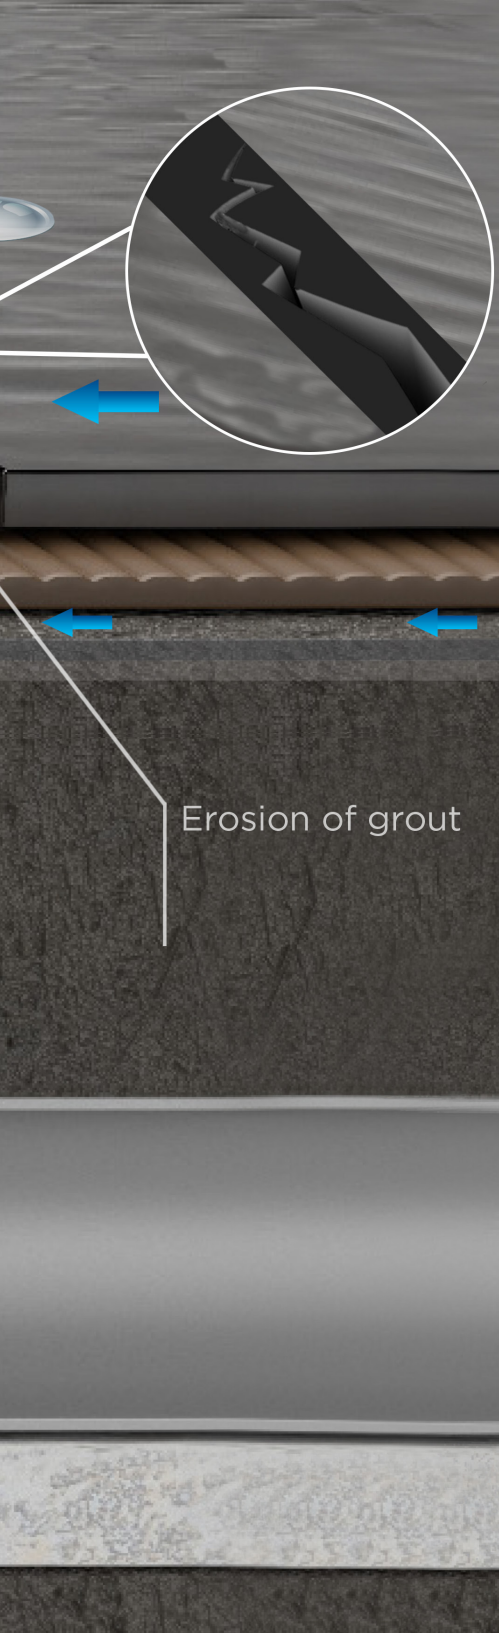

ALS
Anti-Leaking System

ALS — Anti-Leaking System represents combination of drain construction and proper installation, which allows all leaked and condensated water under the tiles to go back to the drain.

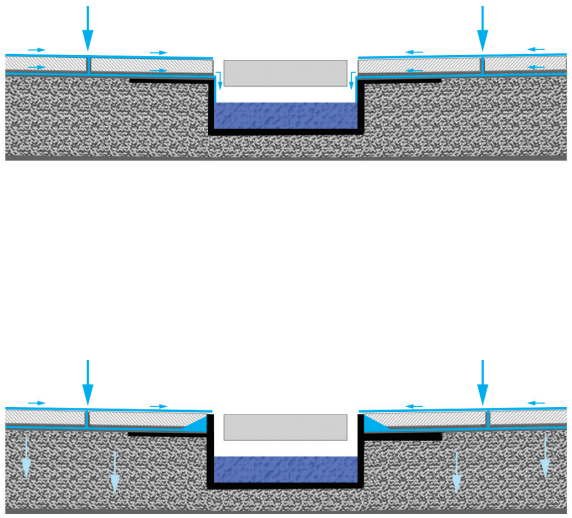

Cross section of linear drain

During the years, water in bathroom has tendency to build under the tiles as consequence of erosion of grout and moisture in the bathroom. Usually it takes 5-7 years until this problem happens and then a leakage shows up in a place where waterproofing was finished. We have solved this problem with our construction of grid holder, where you have no barrier for water under the tiles. Also, in order that this system works properly, it is very important to do correct slope screed and proper waterproofing as per our instruction manual.



Confluo Frameless Line is characterized by a modern “no frame” design of grid which gives this product a unique and elegant look, especially when you use our 2 in 1 reversible grid system and insert ceramic. It is available in stainless steel, black matte, glass, and 24k gold plated finish with a superior flow rate of 48 l/min, all with Anti-Leaking System – ALS and both water and dry siphon for bathrooms which are rarely used, and where the underfloor heating is installed.

Confluo
Frameless Line

Main advantages:

- Minimum installation height — 62 mm
- Maximum flow rate — 48 l/min
- ALS — Anti-Leaking System
- Reversible grid — 2 in 1 system
- 360° rotatable self-cleaning S base
- Combined siphon — wet + dry

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm

Grid Design




Dry siphon for linear drains with O-Ring included for extra protection against bad smells and insects when water evaporate from S base.

* Included in standard product.



Confluo Frameless styrofoam with dual role — Protection during the installation of the drain and and benchmark for perfect leveling of ceramic.

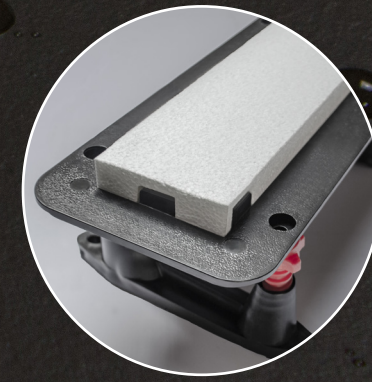

Confluo **Frameless** Line

Frameless **300** | Frameless **450** | Frameless **550** | Frameless **650** | Frameless **750** | Frameless **850** | Frameless **950**



Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid holder
5.1 Grid for hair — flow rate 48l/min
5.2 Dry siphon — flow rate 26l/min
6. Grid
7. Protective styrofoam
8. Mapei waterproofing butyl tape

62 mm
Min. installation height

48l/min
Maximum flow rate

SC
Self-cleaning base

K3
Load class of grid

ALS
Anti-leaking system

Ø 50 output
Base diameter outlet

360° base rotation
Base rotation

25 mm
Water seal height


AISI 304
Material of grid

2 in 1 System

Stainless steel/Ceramic



Black Glass/Stainless steel

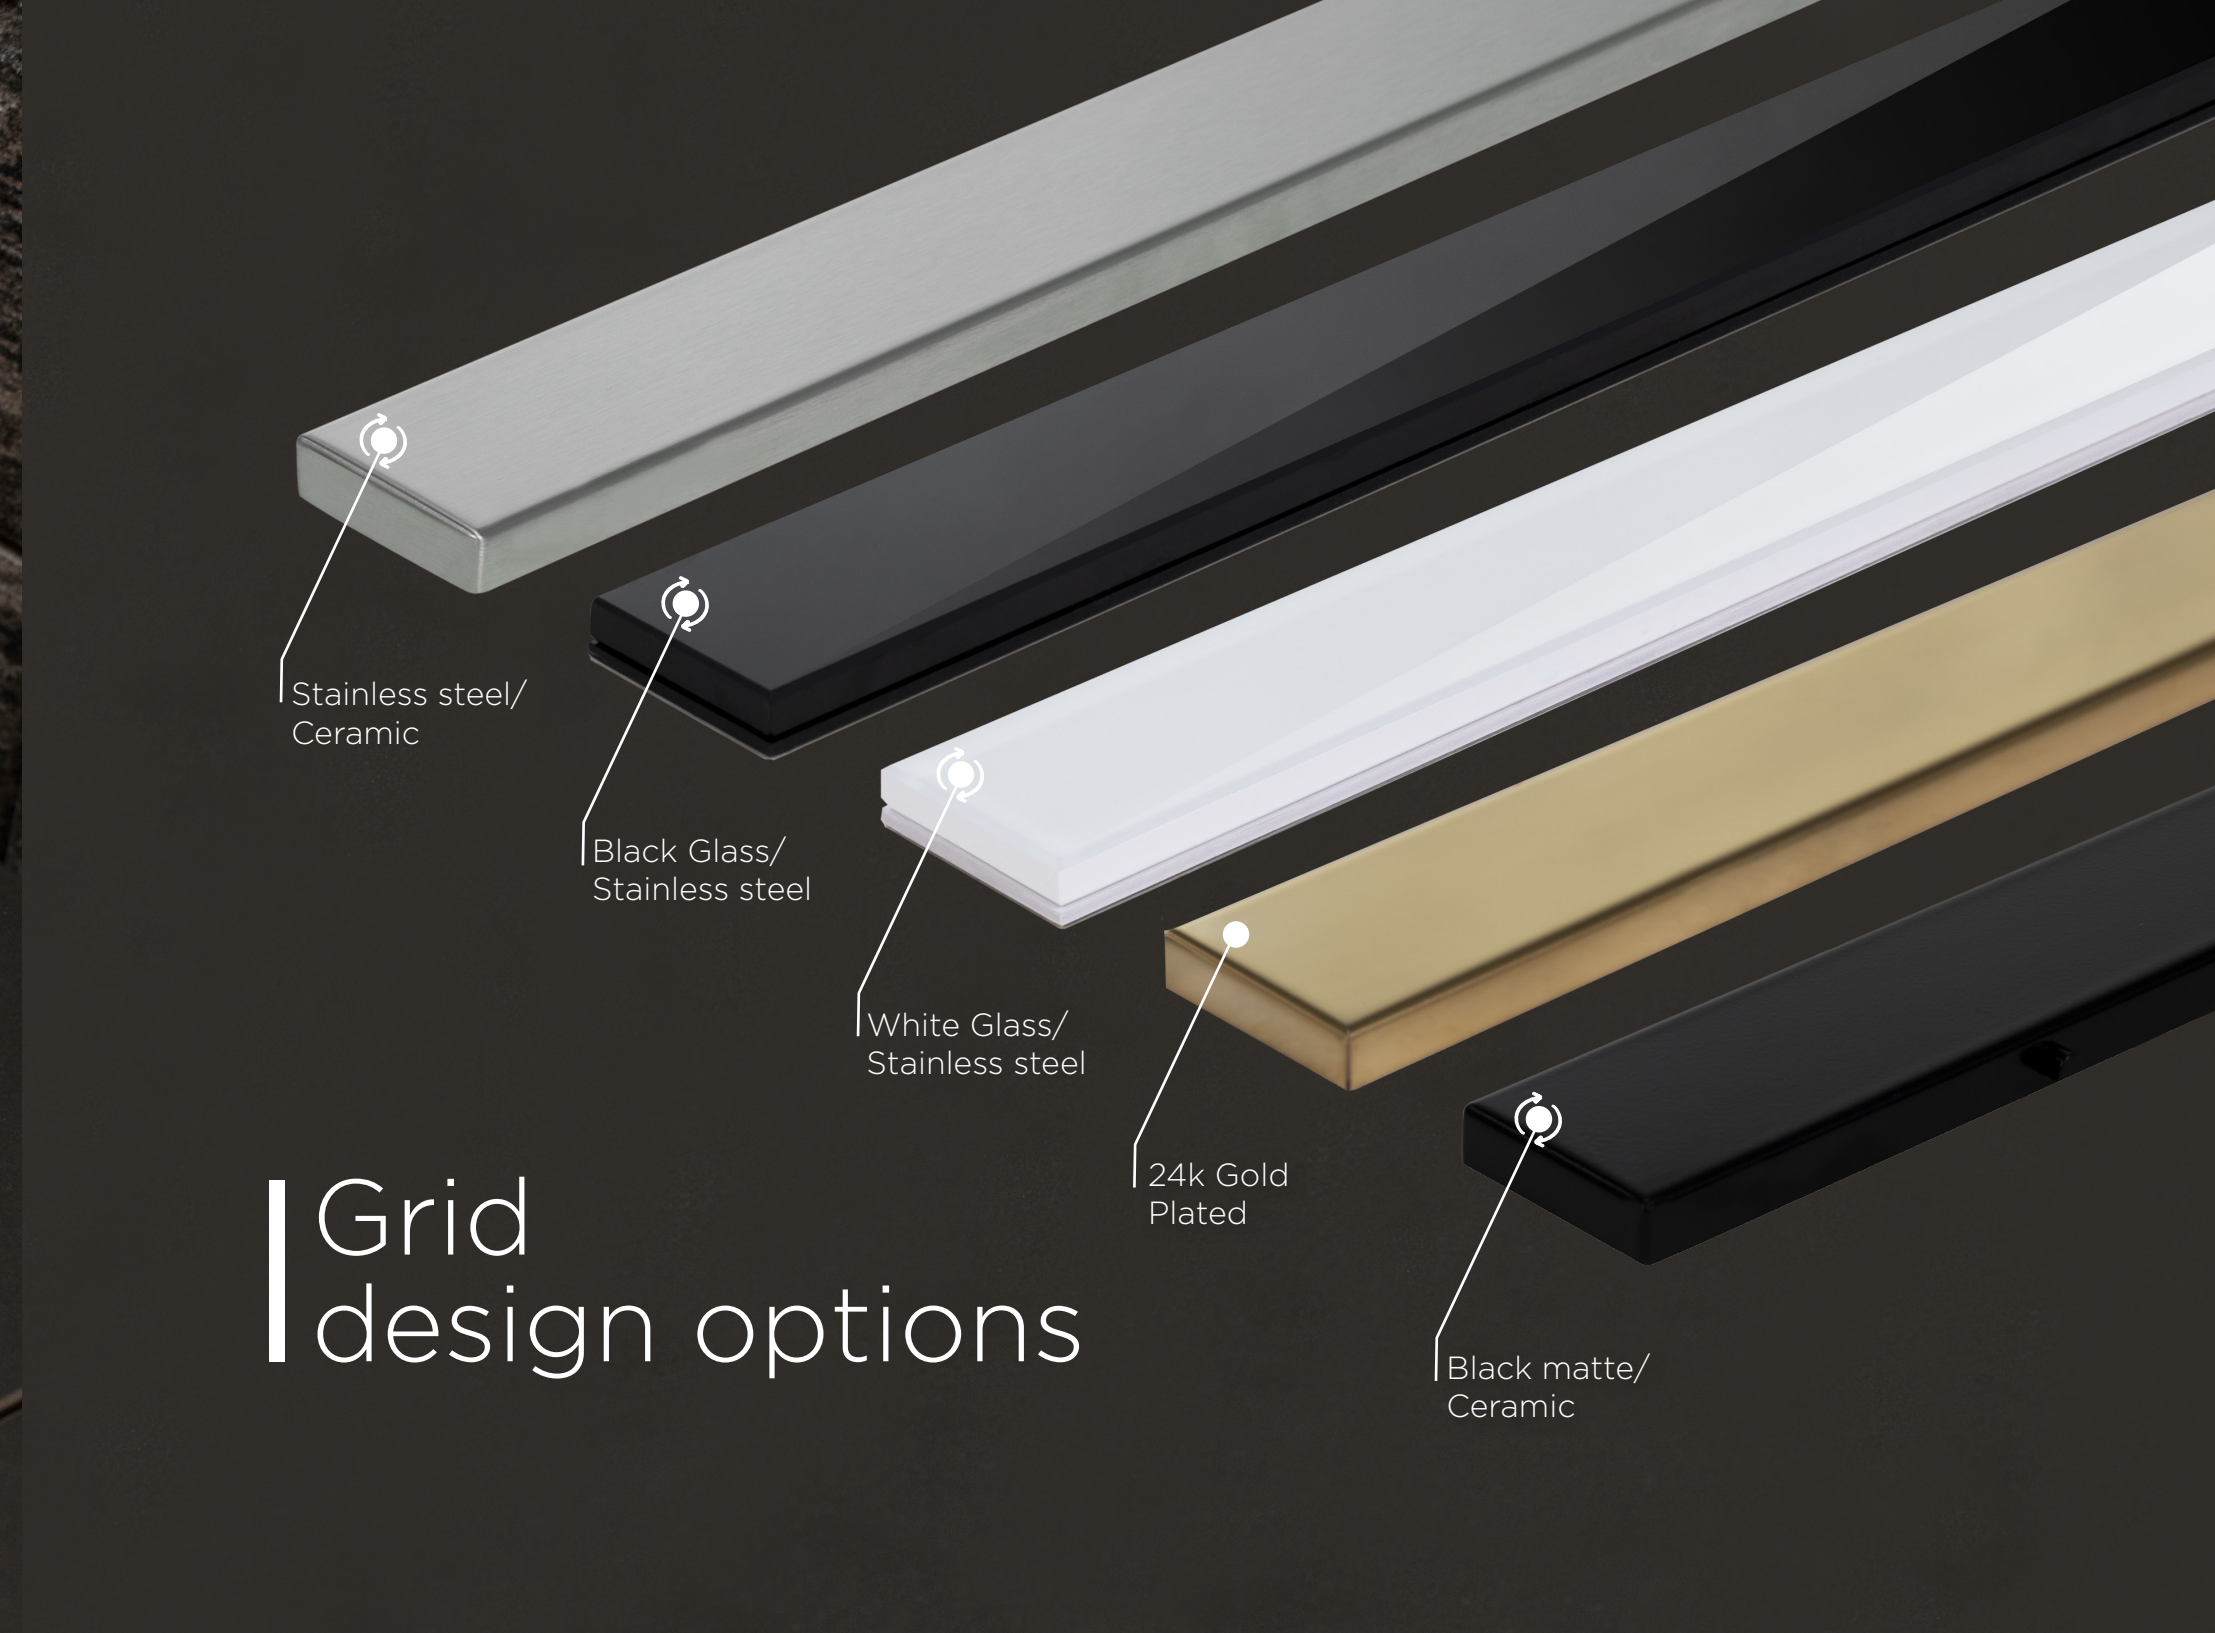

Grid design options

Modern functionality




Confluo Frameless Line White Glass



Confluo Frameless Line Black Glass



Confluo Frameless Line Black Matte

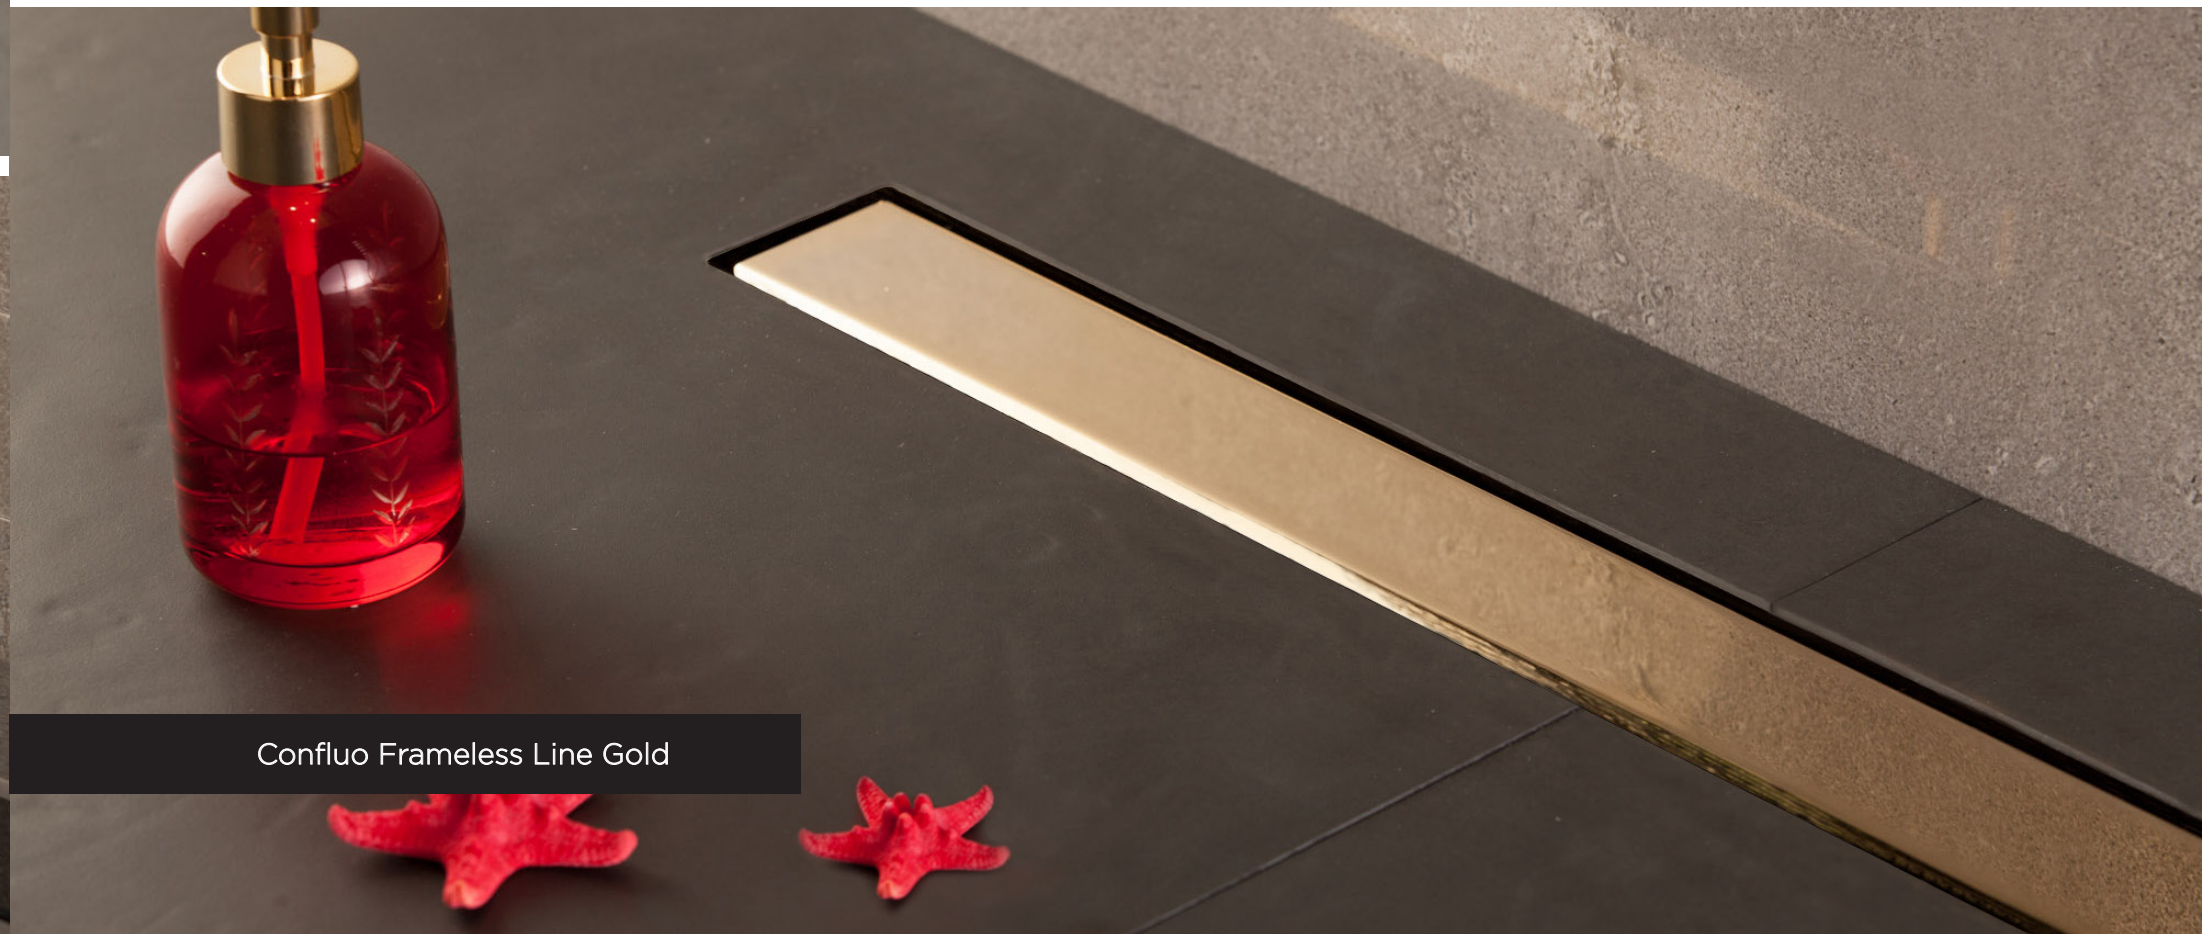

Confluo Frameless Line Gold


Minimalistic design





The Confluo FIX line of bathroom drain with a fixed base is characterized by ease of installation and maintenance. The drain size of 50 mm (DN50) allows the siphon to drain large amounts of water. The siphon is fixed to the sink body, which makes installation very simple. The drain is with a horizontal connection and size DN50mm, so no adapters are needed for connecting to the pipeline. By simply removing the siphon cover, cleaning and maintenance is very simple and affordable. High water flow ensures efficient drainage without water retention in the shower area. The low installation height makes the downspout flexible in terms of installation in renovated or new buildings. The 2in1 system allows the drain to fit perfectly into the design of modern bathrooms. Although the drain body and siphon are made of the highest quality ABS plastic, there are no visible plastic parts after installation. Metal grills and masks are made of high-quality stainless steel (SS304) available in Chrome, Matt Black and Copper finishes. The grids withstand the K3 load class

Confluo **Fix** Line

Main advantages:

- Minimum installation height — 64 mm
- Maximum flow rate — 48 l/min
- Reversible grid — 2 in 1 system
- Fixed siphon for drain body
- Without visible plastic parts

Dimensions: 450, 550, 650, 750 mm

Grid design:






Silicone membrane, prevents the appearance of unpleasant smellthanks to the unique silcone solution membrane, which prevents the appearance of the negative pressure and disappearance of water from
siphon.


Confluo **Fix** Line

Fix **450** | Fix **550** | Fix **650** | Fix **750**

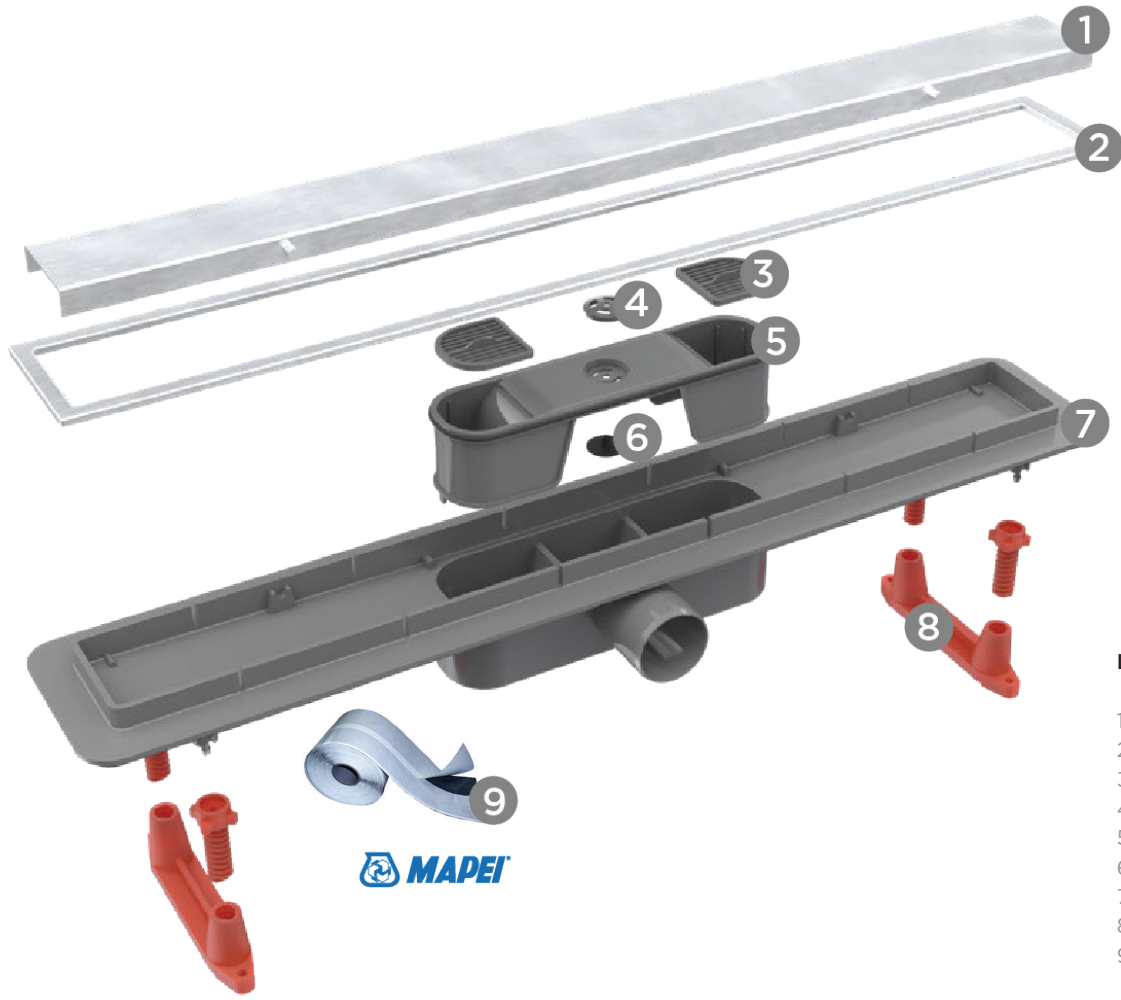

Legend:

1. Drain Grid
2. Grid mask
3. Grid for hair
4. Holder with membrane
5. Siphon with membrane
6. Silicone membrane
7. Grid holder with fixed base
8. Height adjustment legs
9. Mapei waterproof butyl tape



Fixed base



Min. installation height



Water seal height



Anti-leaking system



Anti vacuum system



Maximum flow rate



Material of grid



2 in 1 system



Handicapped accessible



Load class of grid



Base diameter outlet



Easy cleaning sistem



Confluo Slim Line is characterized by minimalist “Slim” design of stainless steel grid, which gives your bathroom a totally different and modern look. The model has the possibility of grid leveling from 5–20 mm, which allows various options when you choose your bathroom surface. Anti-Leaking System – ALS is also one of the main advantages of “Slim”, which is designed in the way that all the condensed and leaked water under the tiles can go back to the drain without any obstacles.

Confluo
Slim Line

Main advantages:

- Minimum installation height — 72 mm
- ALS — Anti-Leaking System
- Unique and minimalist design of grid
- 360° rotatable self-cleaning S base
- Height adjustable grid — 5—20 mm

Dimensions: 300, 450, 550, 650, 750, 850, 950 mm


Grid Design





Confluo **Slim** Line

Slim **300** | Slim **450** | Slim **550** | Slim **650** | Slim **750** | Slim **850** | Slim **950**

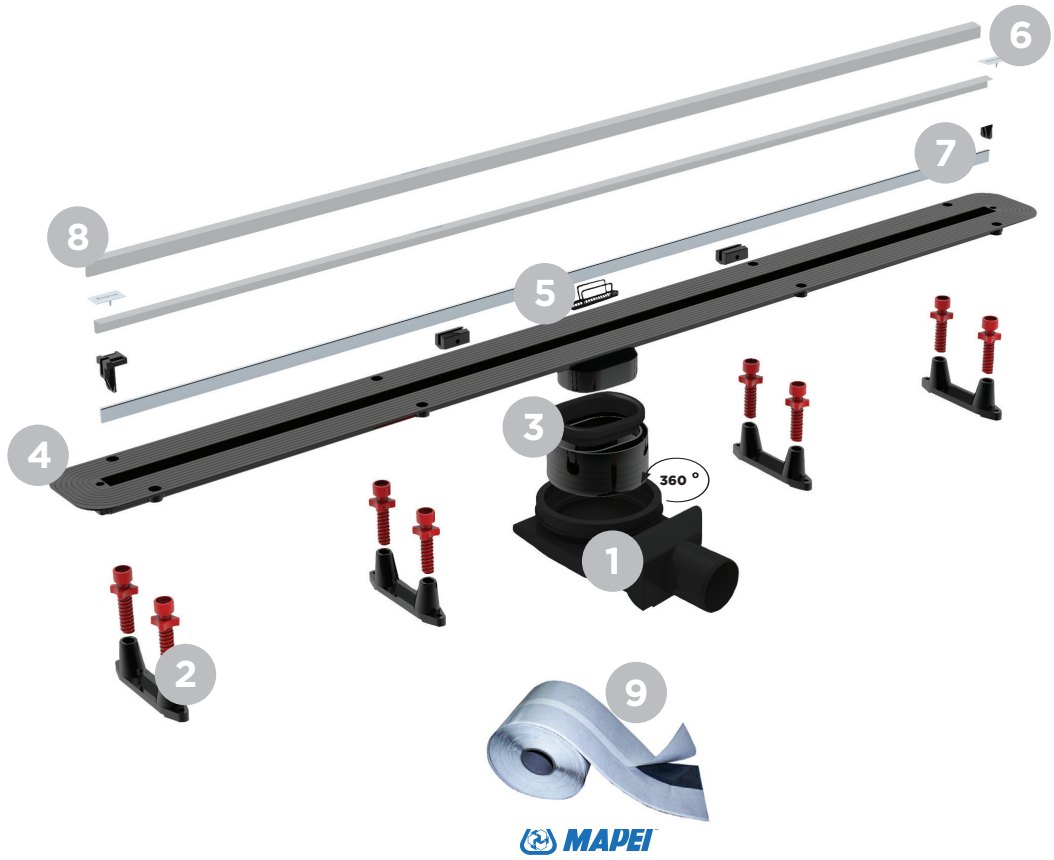

Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Holder of grid
5. Grid for hair
6. Decorative Plate
7. Grid
8. Aluminum profile for ceramic
9. Mapei waterproofing butyl tape

72 mm
Min. installation height

48l/min
Maximum flow rate

SC
Self-cleaning base

25 mm
Water seal height

easy access
Handicapped accessible

ALS
Anti-leaking system

Ø 50 output
Base diameter outlet

20mm
5mm
Fine ceramic adjustment

360° base rotation
Base rotation



Confluo Wall Drain is an innovative concept in the shower drains industry. Possibility of positioning the drain into the wall instead of the floor gives your bathroom a huge number of possibilities, both technically and design-wise. The model has an Anti-Leaking System – ALS, superior flow rate of 48 l/min, the minimum installation height of 56 mm, and installation depth of 80 mm, which makes this model perfect for bathrooms with concealed cisterns and renovation projects with limited space.

Confluo
Wall drain

Main advantages:

- Minimum installation height — 56 mm
- Maximum flow rate — 48 l/min
- ALS — Anti-Leaking System
- 360° rotatable self-cleaning S base
- Perfect model for renovations and bathrooms with concealed cistern

Dimensions: 300 mm

Grid Design


Stainless steel

24K Gold Plated



CONFLUO **WALL** DRAIN

WALL **300**

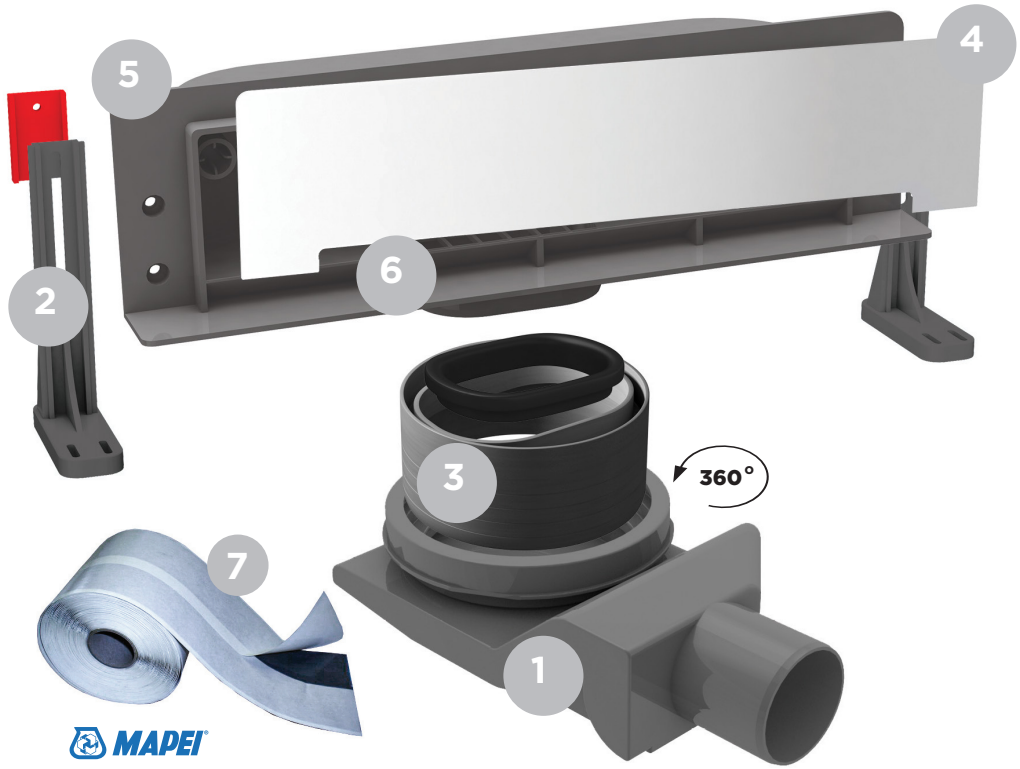

Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid
5. Grid holder
6. ALS chambers
7. Mapei waterproofing butyl tape

56 mm
Min. installation height

48l/min
Maximum flow rate

SC
Self-cleaning base

25 mm
Water seal height


easy access
Handicapped accessible


ALS
Anti-leaking system

Ø50 output
Base diameter outlet

360° base rotation
Base rotation

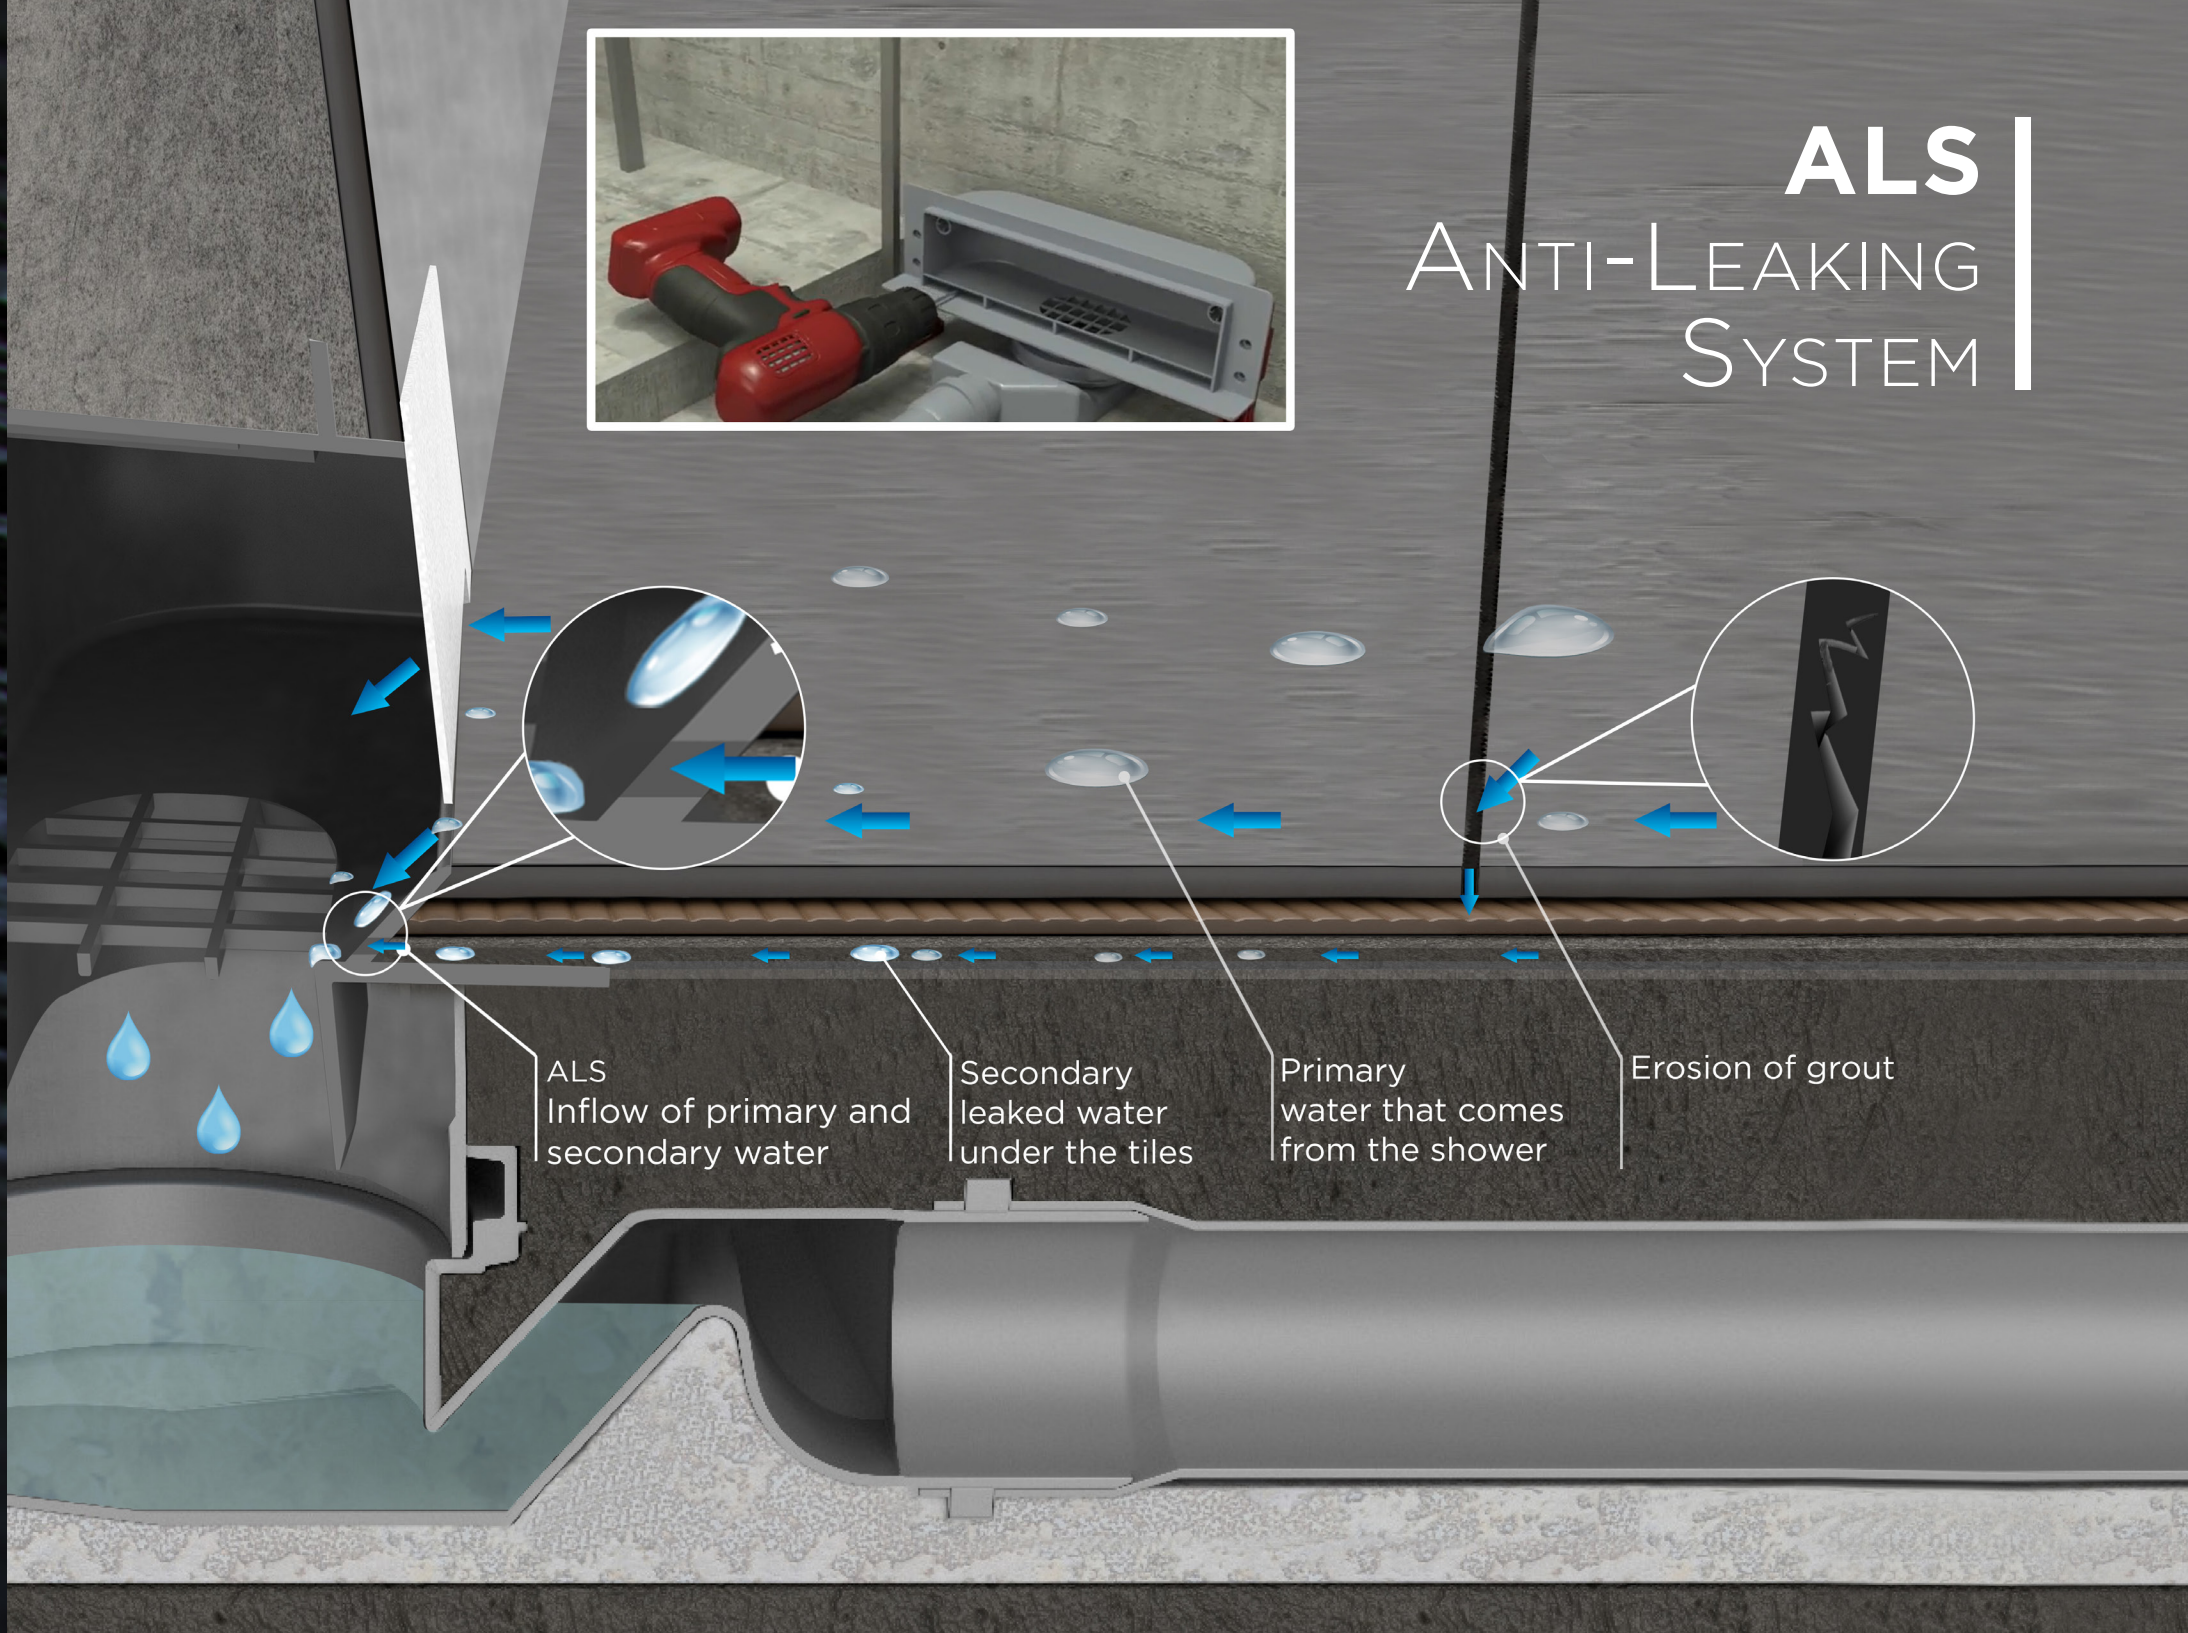


ALS
ANTI-LEAKING
SYSTEM
ALS
Inflow of primary and
secondary water
Secondary
leaked water
under the tiles
Primary
water that comes
from the shower
Erosion of grout

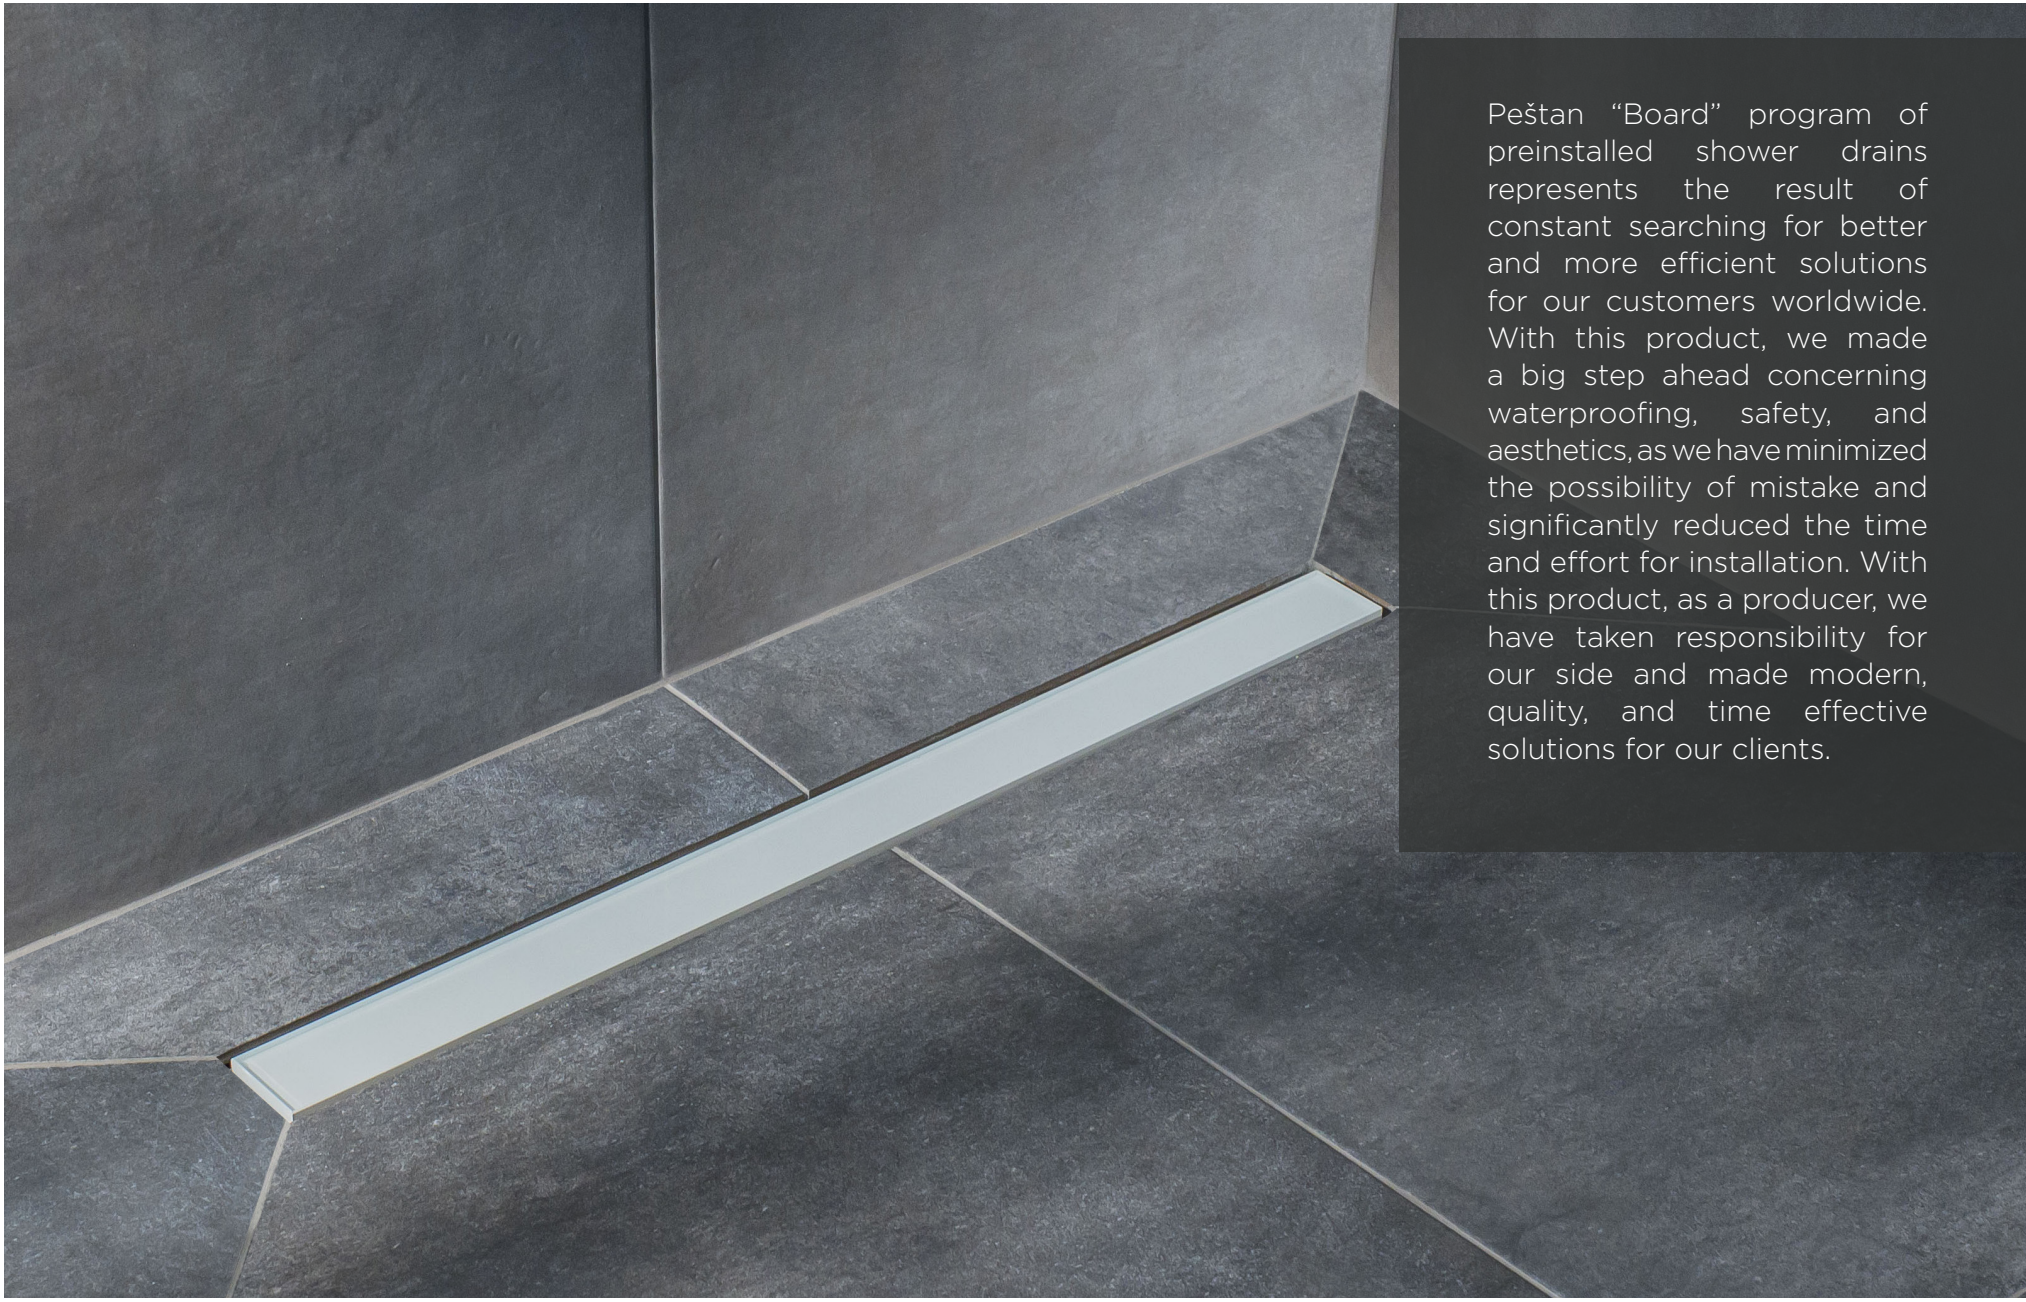

Peštan “Board” program of preinstalled shower drains represents the result of constant searching for better and more efficient solutions for our customers worldwide. With this product, we made a big step ahead concerning waterproofing, safety, and aesthetics, as we have minimized the possibility of mistake and significantly reduced the time and effort for installation. With this product, as a producer, we have taken responsibility for our side and made modern, quality, and time effective solutions for our clients.

Confluo **Board**

Main advantages:

- Peripor Board — 45 kg/m^3
- MAPEI waterproofing
- Time and cost effective
- High Flow Rate — 48 l/min
- ALS — Anti-Leaking System
- Combined siphon — wet + dry


Board dimensions:

- UNI 900
- UNI 1200
- 900X900X80/95 mm
- 900X900X38/52 mm
- 1200X1200X80/95 mm
- 1200X1200X35/54 mm

Grid Design




We produce our Confluo Board Frameless Line in 2 dimensions (900 x 900 mm & 1200 x 1200 mm) and a few board thicknesses, depending on whether you are renovating or making a new building. The product comes with 5 different 2 in 1 grid designs (Chrome/Ceramic, Black Glass/Chrome, White Glass/Chrome, Matte Black/Ceramic, and Gold), 360° rotatable S base with drainage capacity of 48 l/min and ALS – Anti-Leaking System. Our boards are made of high-quality peripor with a density of 45 kg/m^3 with preinstalled slopes and it is coated with MAPELASTIC TURBO and MAPEBAND waterproofing.

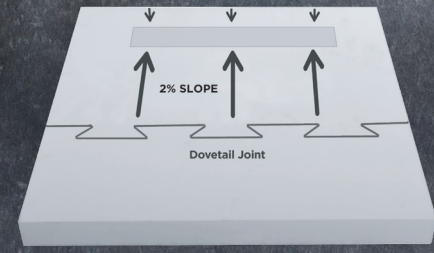

A great benefit of the Confluo “Board” preinstall shower drains is that installation time and price are significantly reduced as a board has integrated slopes and applied MAPEI waterproofing.

Confluo **Board Frameless** Line

Board Frameless UNI 900	Board Frameless UNI 1200	Board Frameless 900X900X 80/95	Board Frameless 900X900X 38/52	Board Frameless 1200X1200 80/95	Board Frameless 900X900X 35/54

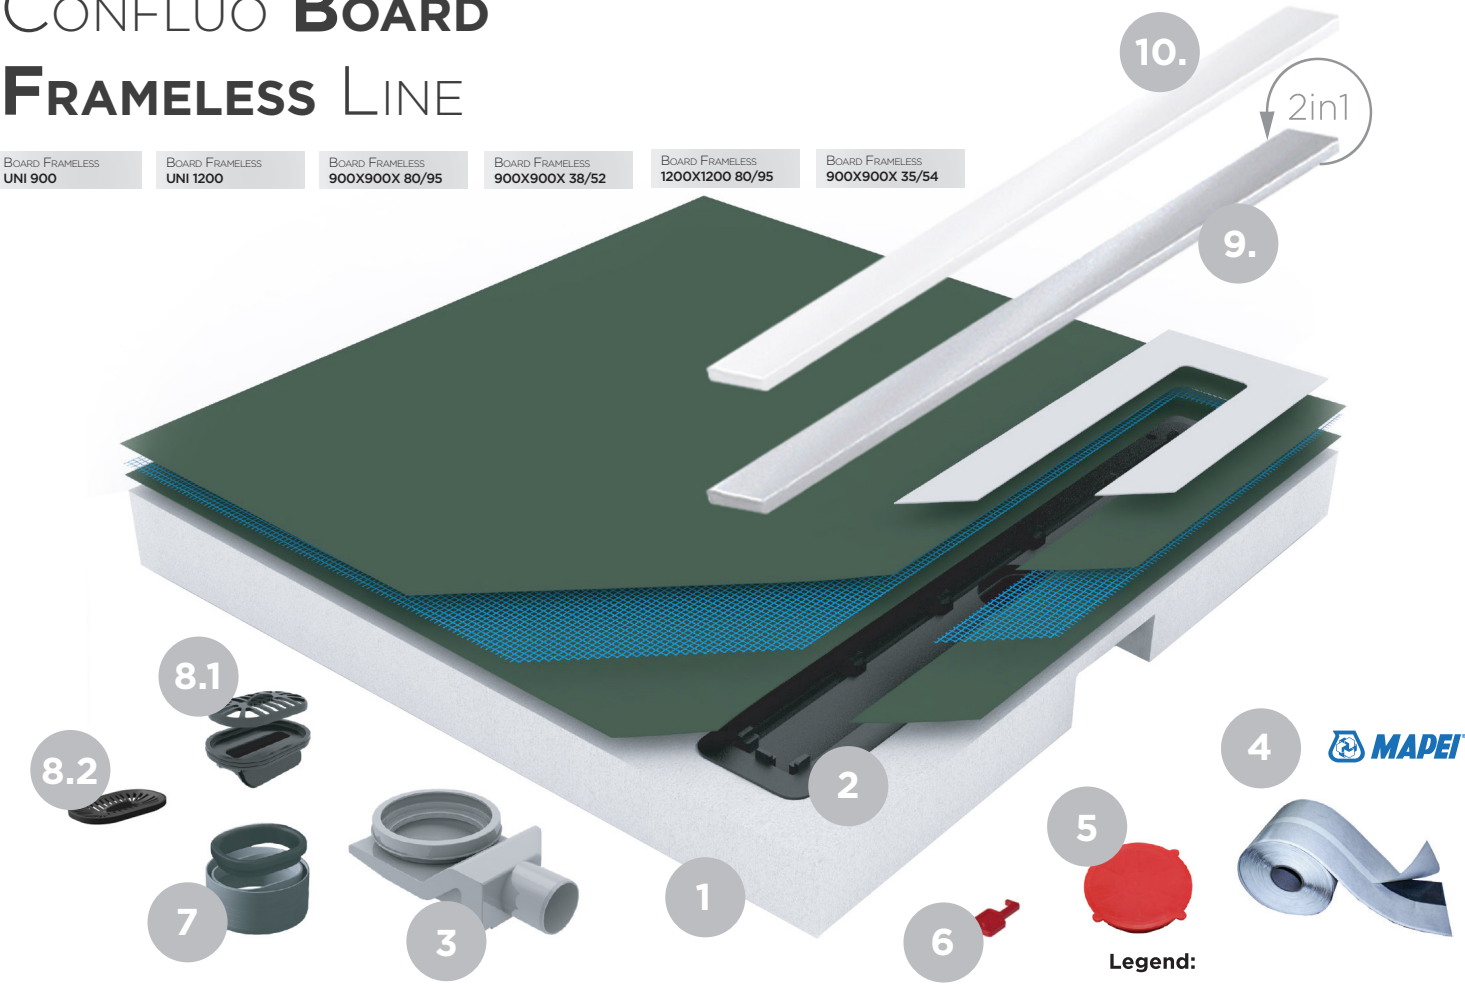

* Board and grid are sold separately
- In both UNI 900 and UNI 1200 is integrated Frameless Line 550 mm
- In 1200x1200 mm Confluo Board is integrated Frameless Line 850 mm
- In 900x900 mm Confluo Board is integrated Frameless Line 750 mm

Legend:

1. Peripor board with integrated waterproofing
2. Grid holder
3. Ultra low S base
4. MAPEBAND tape
5. Protective cap
6. Maintenance key
7. Reducer with rubber ring
8.1 Dry siphon
8.2 Grid for hair
9. Grid
10. Protective styrofoam

48l/min
Maximum flow rate

2 in 1 system
2 in 1 system

SC
Self-cleaning base

25 mm
Water seal height

K3
Load class of grid

easy access
Handicapped accessible

ALS
Anti-leaking system

Ø50 output
Base diameter outlet

360° base rotation
Base rotation

AISI 304
Material of grid

Confluo Board benefits:


1. **Peripor Board** - Peripor is expandable polystyrene (EPS) that is particularly suitable for applications exposed to compressive load. The most important properties of Peripor are:
   - Excellent thermal insulation capacity
   - High density — 45 kg/m^3
   - Outstanding impact absorption
   - Low weight
   - Imperviousness to moisture

2. **MAPEI waterproofing** - On Confluo Board is factory applied one of the most quality waterproofings, MAPELASTIC Turbo two-components rapid-drying elastic cementitious mortar and MAPEI waterproofing butyl tape which guarantees 100% water tightness of our system.

3. **Dovetail Joint** - This method of joining the plates provides the strength of a joint that is resistant to all possible stresses. Also, it prevents entering concrete between the plates.

4. **Time and cost-effective** - A great benefit of the Confluo "Board" preinstall shower drains is that installation time and price is significantly reduced as a board have integrated slopes and applied MAPEI waterproofing.

5. **High Flow Rate** – System provides a flow rate of 48l/min, which is in accordance with the highest standards.

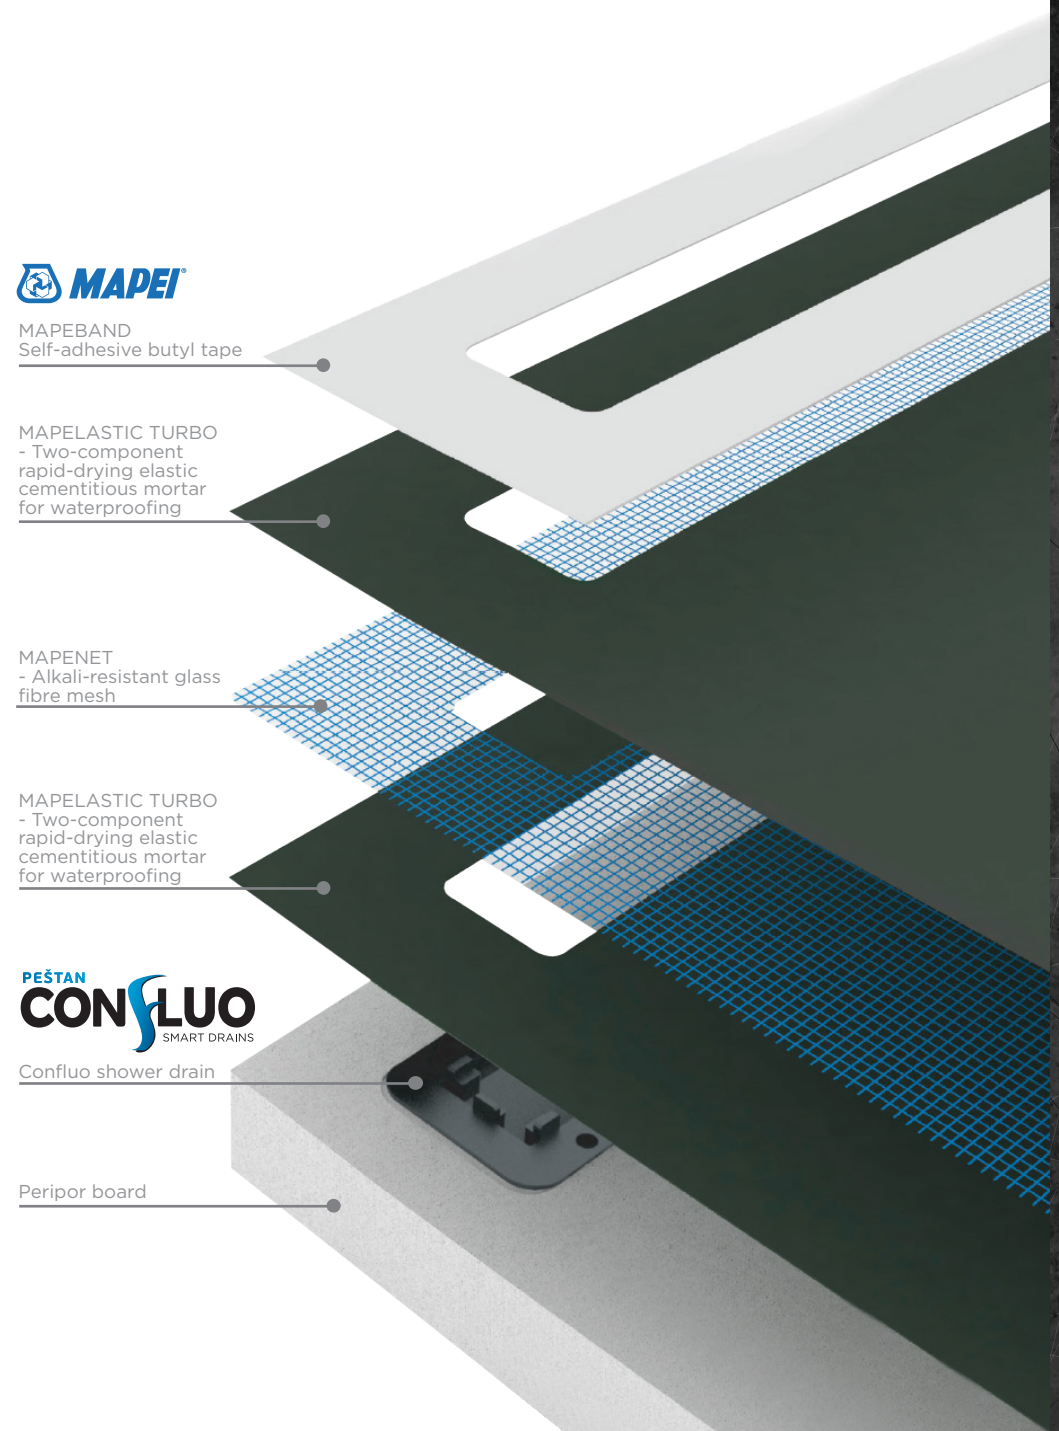


Confluo **UNI** Board


Board dimensions:
- 900 x 900 mm
- 1200 x 1200 mm

Grid dimensions:
- 550 mm

1st layer thickness:
- 38 - 52 mm Board UNI 900
- 35 - 54 mm Board UNI 1200

1st + 2nd layer total thickness:
- 80 - 95 mm

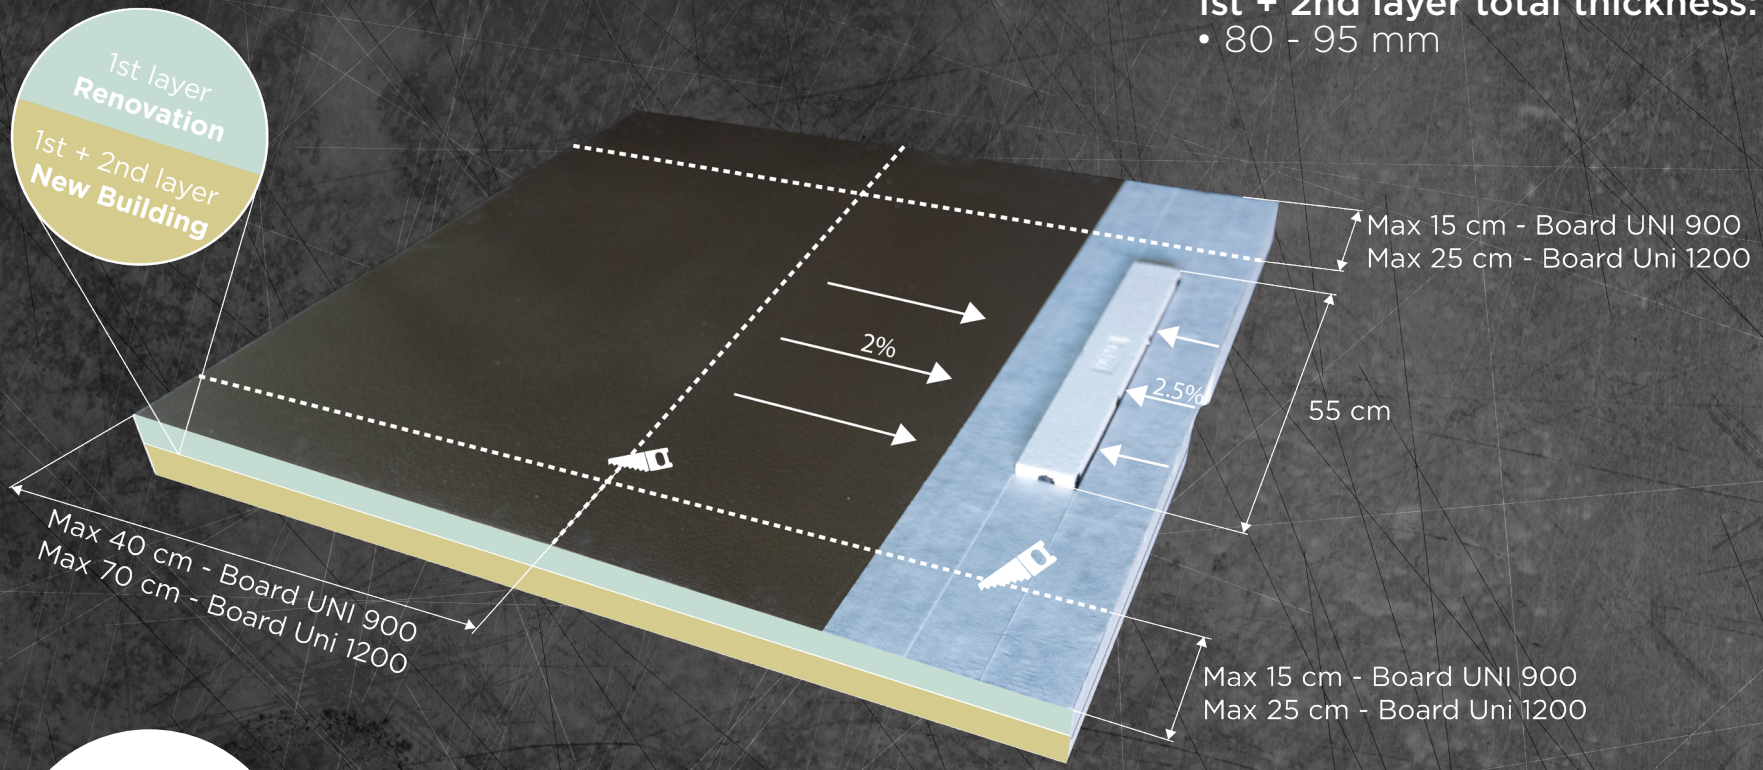

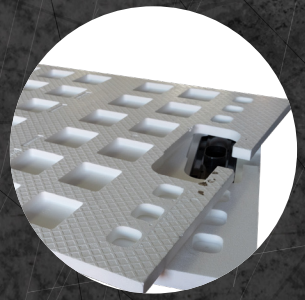

The product box contains already cut Confluo board on 2 thicknesses. If you use only the top layer it is a perfect model for renovation with under 40mm board height in the lowest point. If you use both layers it transforms Confluo Board Uni in an ideal solution for bathrooms with only concrete slab and replaces screed in shower area 100%.



Peštan offers more than 150 different models of Confluo Standard floor drains. All models have a body made of plastic and grid made of stainless steel or glass, which we deliver in various designs and sizes + complete accessories and set for protection during the pouring of the concrete floor.

Confluo **Standard**

Main advantages:

- Minimum installation height — 56—78 mm
- Maximum flow rate — 48 l/min
- Unlimited leveling of ceramic
- Modularity — 7 different output options,
  4 different siphons, 11 grid options
- Rotable — 360° base rotation + 15° angle rotation

Grid finish




Types of Confluo **Standard** Grids



Square 15x15



Tide 15x15 and 10x10

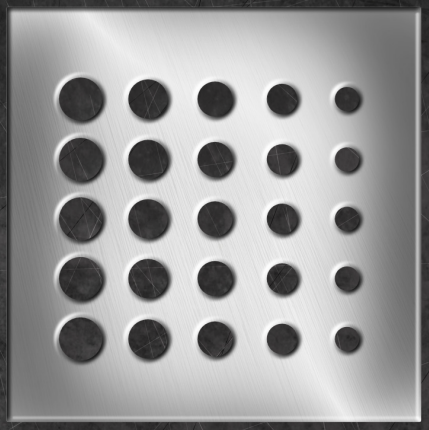

Drops 15x15



Plate 2 in 1
15x15 and 10x10



Angle 20x20



Black Glass
15x15 and 10x10




White Glass
15x15 and 10x10




Ceramic
15x15 and 10x10


Types of bases for Confluo **Standard** drains

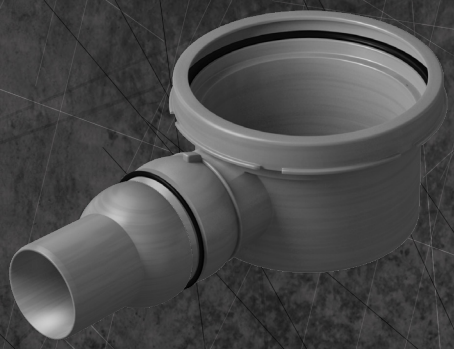


Base with 1 horizontal outlet

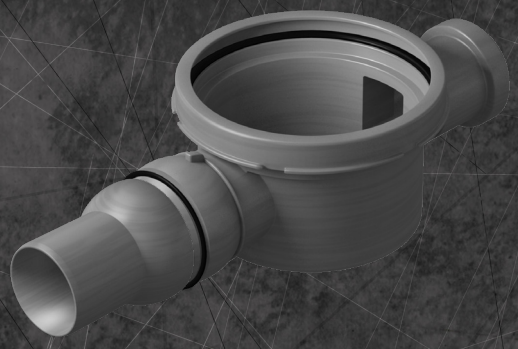

Base with 1 horizontal outlet/1 inlet

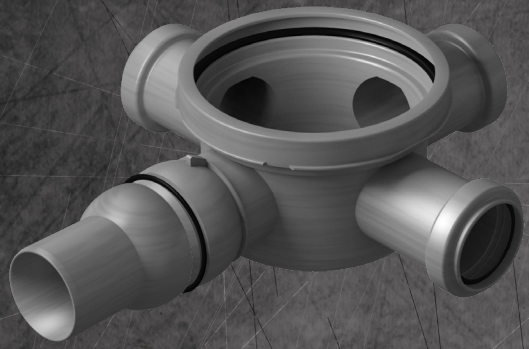


Base with 1 horizontal outlet/3 inlets




Vertical base



Vertical base for dry siphon models

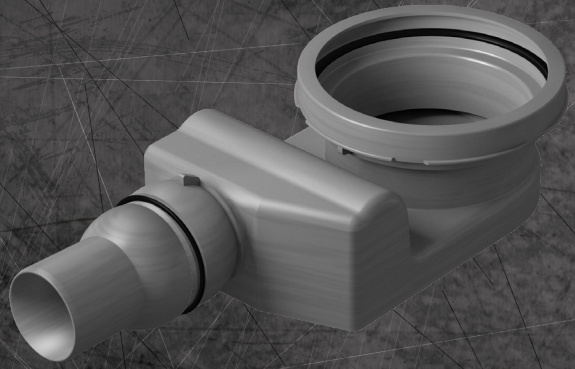

S base with 28 mm of water seal and adjustable output

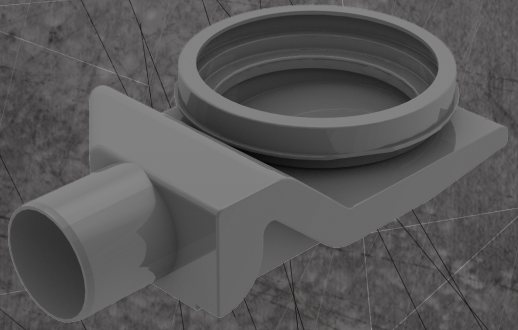


Ultra low S base with 25 mm of water seal



Confluo **Standard** drains with metal grid


Models with 15x15 grid

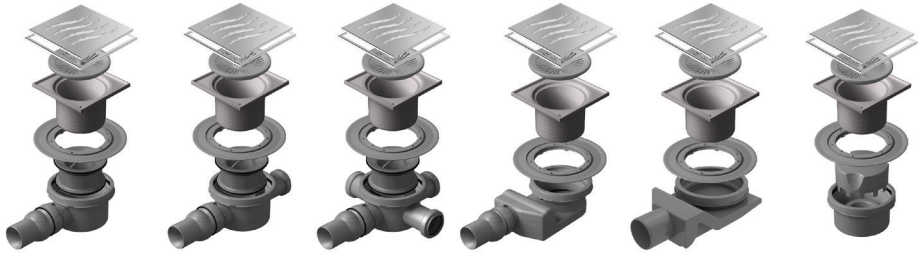


Optional




Grid design

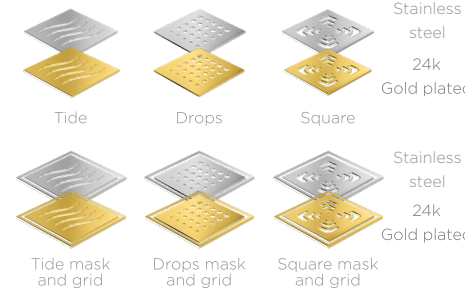

Models with 10x10 grid

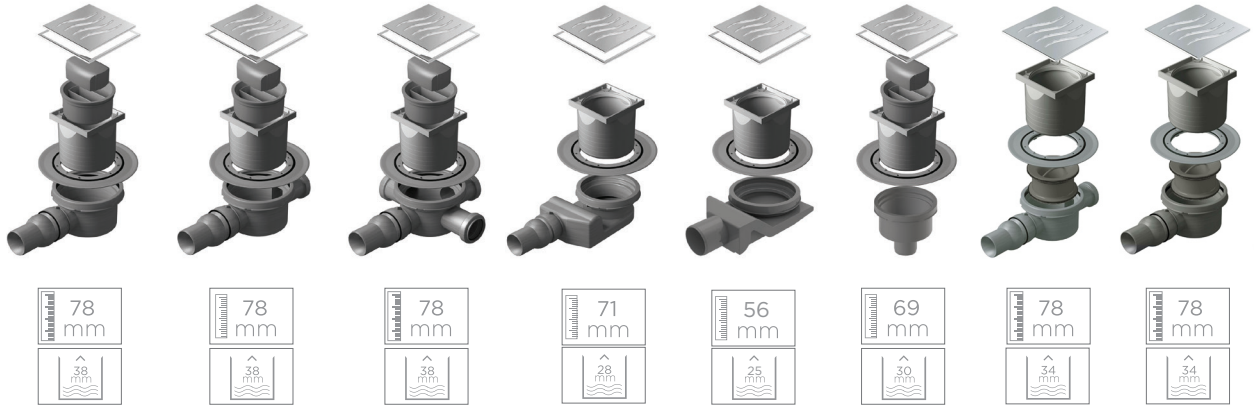

Grid design



48l/min
Maximum flow rate

ø50 output
Base diameter outlet

ø40 inlet
Base inlet diameter

360° base rotation
Base rotation

easy access
Handicapped accessible

15°
Fine output adjustment


Unltd
Ceramic adjustment

AISI 304
Material of grid




Confluo
Standard Glass drains

Models with 15x15 grid

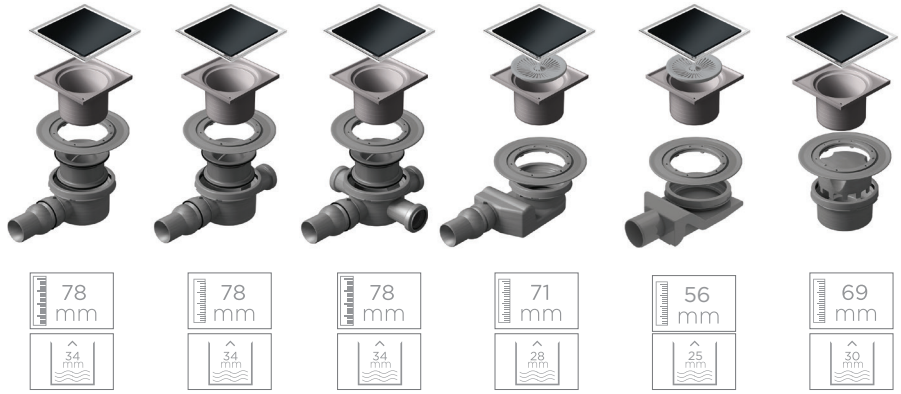

Models with 10x10 grid

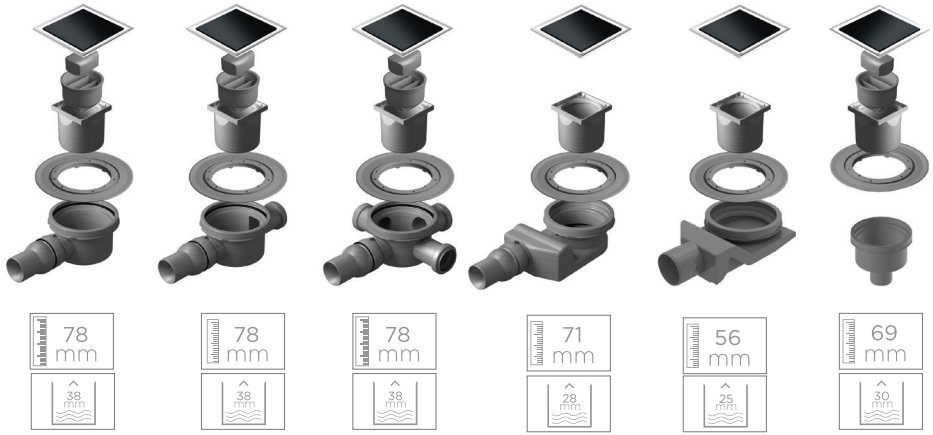

Optional



Irretrievable valve



End cap Ø40




Hydroisolation flange


Grid design




Black glass




White glass



Black glass/ 24k gold plated mask



White glass/ 24k gold plated mask




Maximum flow rate



Base diameter outlet



Base inlet diameter



Base rotation



Handicapped accessible



Fine output adjustment




Ceramic adjustment



Confluo
Standard Ceramic drains


Models with 15x15 grid

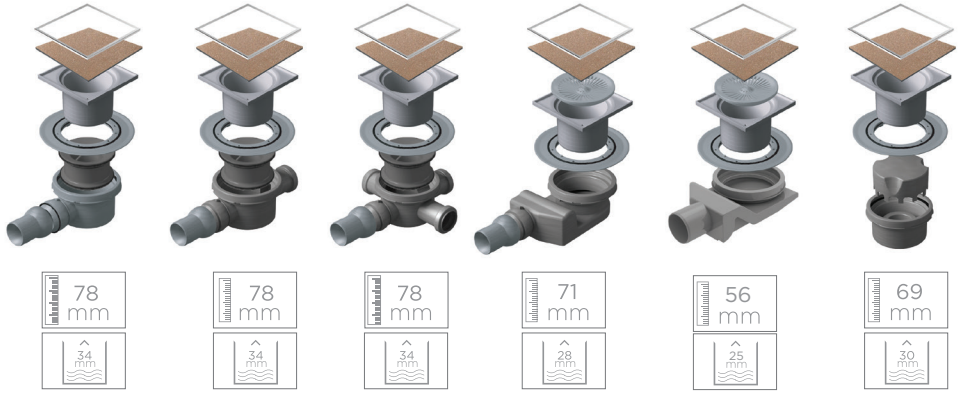


Optional




Grid design



Models with 10x10 grid - Dry

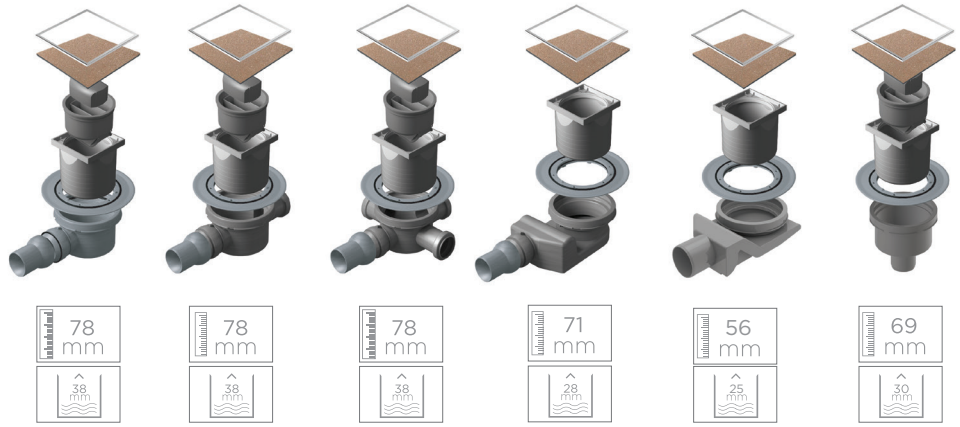




Maximum flow rate



Base diameter outlet



Base inlet diameter



Base rotation



Handicapped accessible




Fine output adjustment




Ceramic adjustment

2 u 1 system
ONE PRODUCT,
TWO DESIGNS



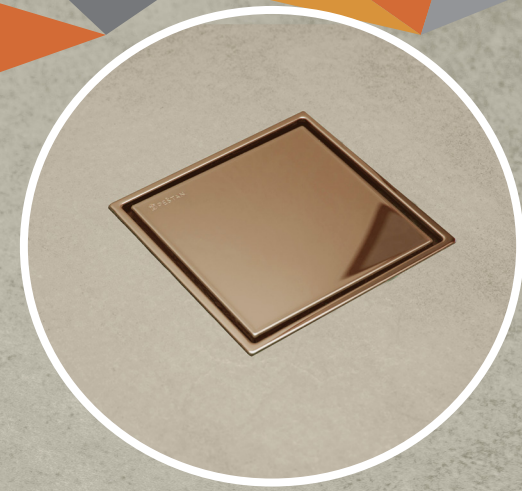

2 u 1 system
Coper

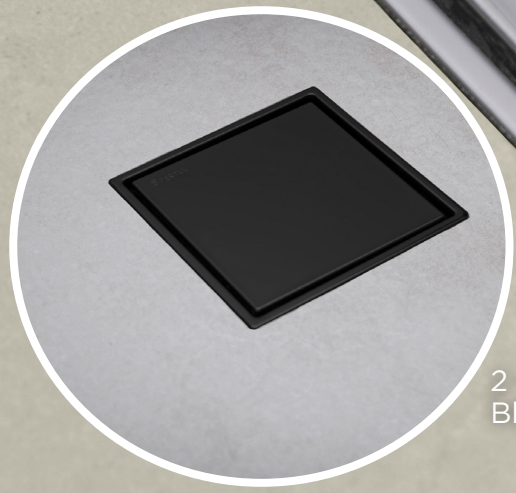


2 u 1 system
Black matt



2 u 1 system
Ceramic

Confluo
Standard Plate 2 in 1


Models with 15x15 grid

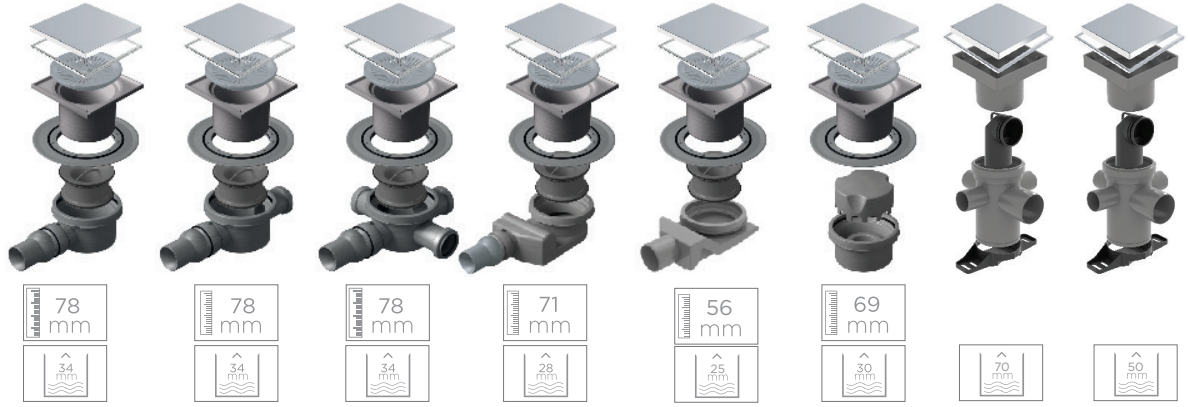


Optional


Irretrievablevalve


End capØ 40



Hydroisolation flange


Grid design



Stainless steel

Models with 10x10 grid - Dry

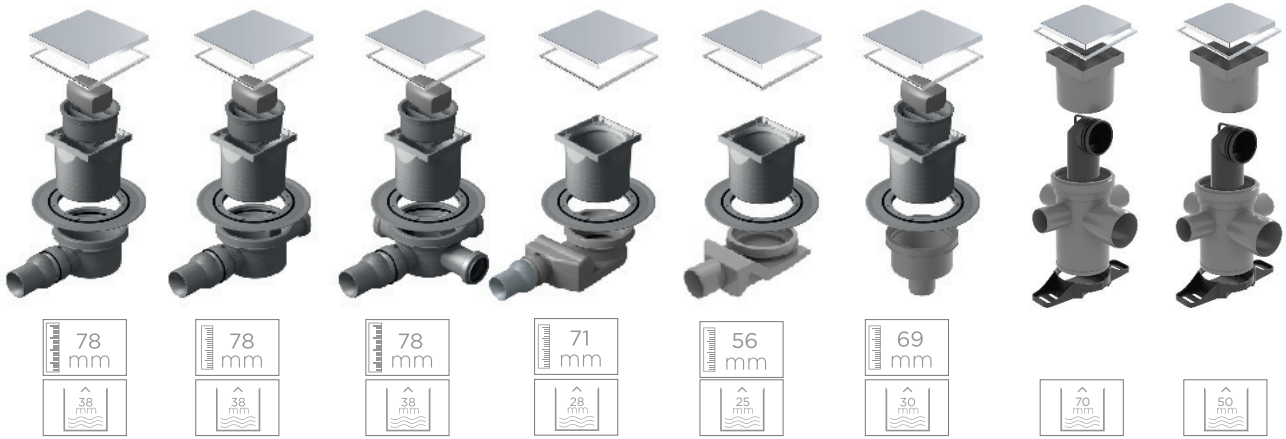



Maximum flow rate




Base diameter outlet



2 in 1 system



Base inlet diameter



Base rotation



Handicapped accessible



Fine output adjustment



Ceramic adjustment




Material of grid



Confluo
Standard Angle drains


Models with 20x20 grid

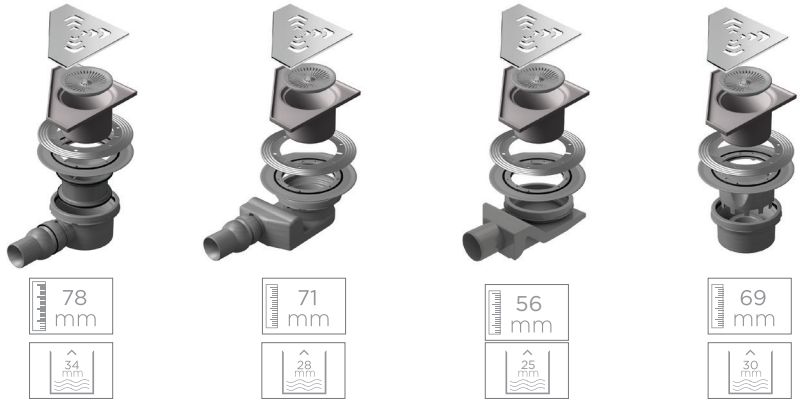


Optional



Irretrievable valve



End cap Ø40



Hydroisolation flange

Grid design



Stainless steel



24k Gold plated

48l/min

Maximum flow rate

ø50 output

Base diameter outlet

360° base rotation

Base rotation

easy access

Handicapped accessible

15°


Fine output adjustment

Unltd

Ceramic adjustment

AISI 304

Material of grid

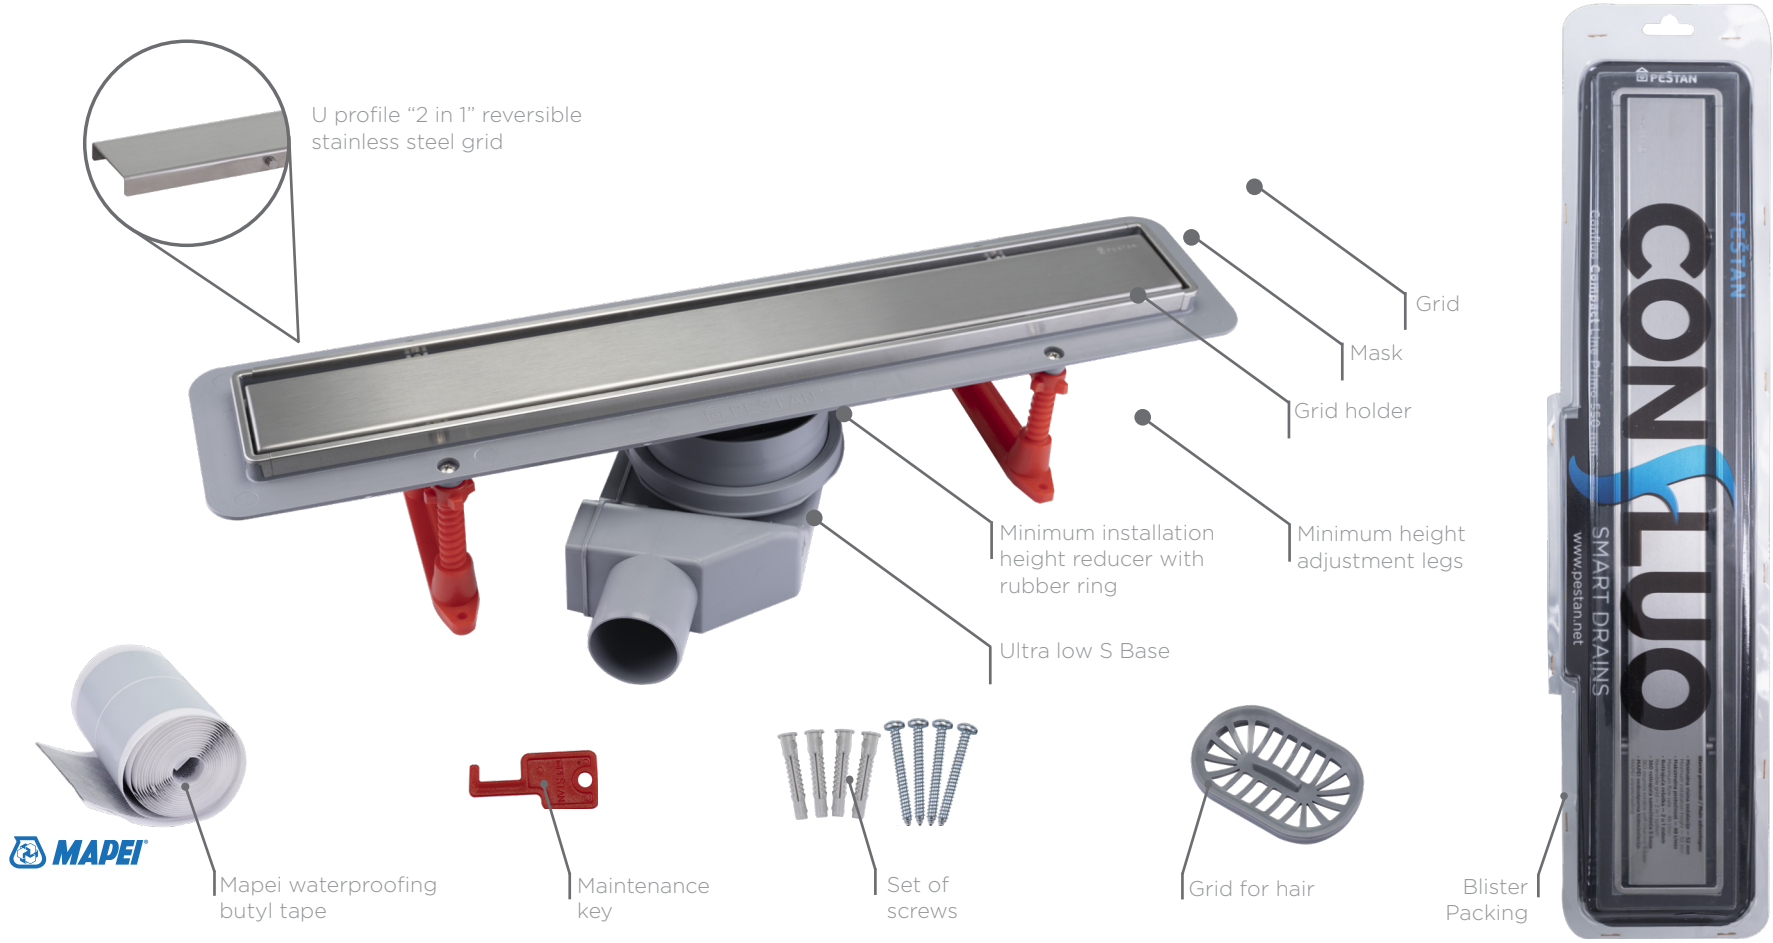

Confluo Primo models are a line of products specially made for mass distribution in DIYs and hardware shops all around the world. All the parts are coming in transparent blister packing and this is our line which fits most property common situations in the bathroom making it perfect for the customers who want good relation between design, price, and quality.

Confluo
Primo

Main advantages:

- Minimum installation height — 52 mm
- Maximum flow rate — 48 l/min
- Reversible grid — 2 in 1 system
- 360° rotable self-cleaning S base
- MAPEI waterproofing

Dimensions: 450, 550, 650, 750, 850 mm

Grid Design





2 in 1 reversible grid
option with ceramic

Confluo **Compact** Line Primo

Compact Line **450** Primo	Compact Line **550** Primo	Compact Line **650** Primo	Compact Line **750** Primo	Compact Line **850** Primo



Also available with
Net grid



Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid holder
5. Grid for hair
6. Mask
7. Grid, full metal
8. Mapei waterproofing butyl tape

52 mm
Min. installation height

48l/min
Maximum flow rate

2 in 1 system
2 in 1 system

SC
Self-cleaning base

K3
Load class of grid

∅ 50 output
Base diameter outlet

360° base rotation
Base rotation

25 mm
Water seal height


AISI 304
Material of grid

PRIMO



CONFLUO **COMPACT** LINE BLACK MATTE PRIMO

Compact BM **450** Primo | Compact BM **550** Primo | Compact BM **650** Primo | Compact BM **750** Primo | Compact BM **850** Primo

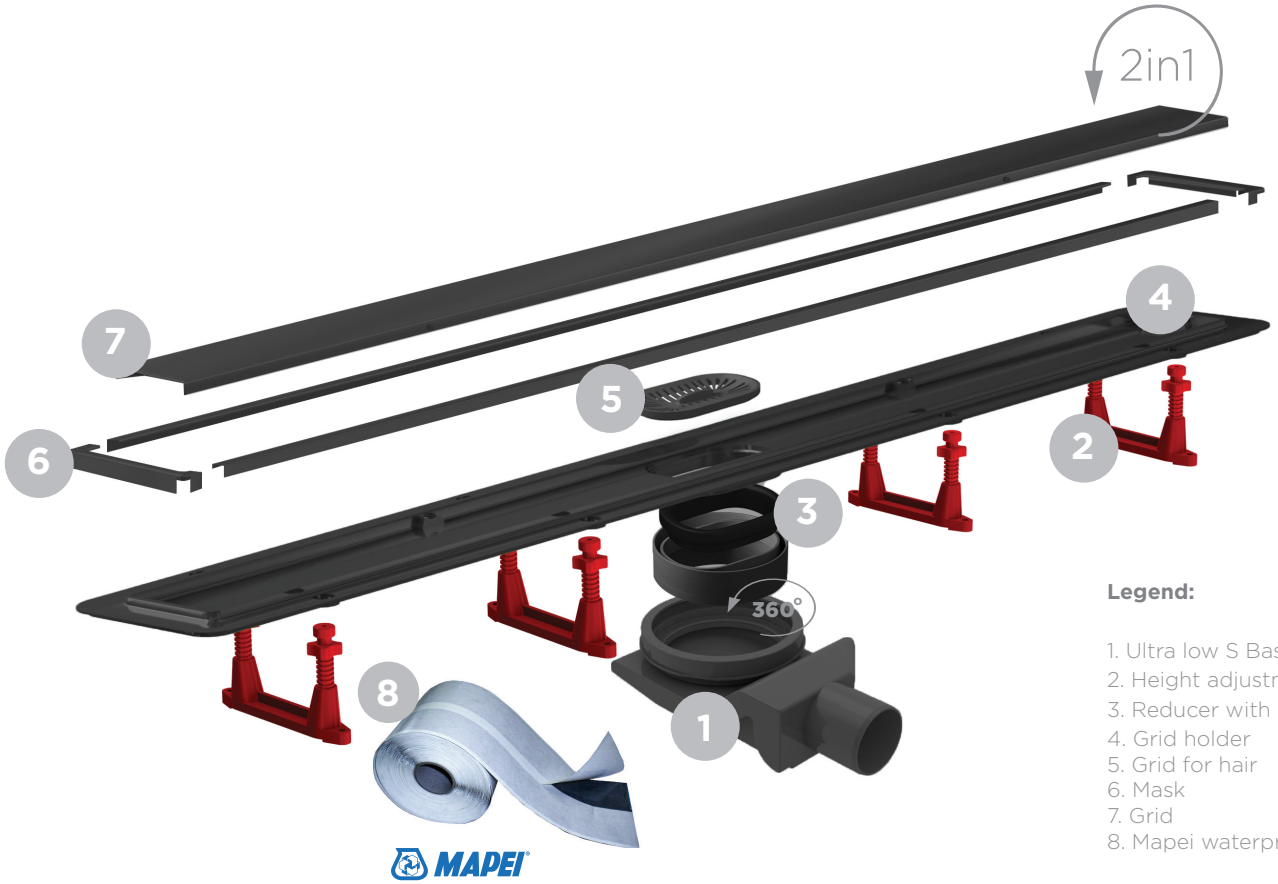

Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid holder
5. Grid for hair
6. Mask
7. Grid
8. Mapei waterproofing butyl tape

52 mm
Min. installation height

48l/min
Maximum flow rate

2 in 1 system
2 in 1 system

SC
Self-cleaning base

K3
Load class of grid

Ø 50 output
Base diameter outlet

360° base rotation
Base rotation

25 mm
Water seal height


AISI 304
Material of grid

PRIMO


PESTAN

Confluo **Primo** Line

Primo **450**	Primo **550**	Primo **650**	Primo **750**	Primo **850**

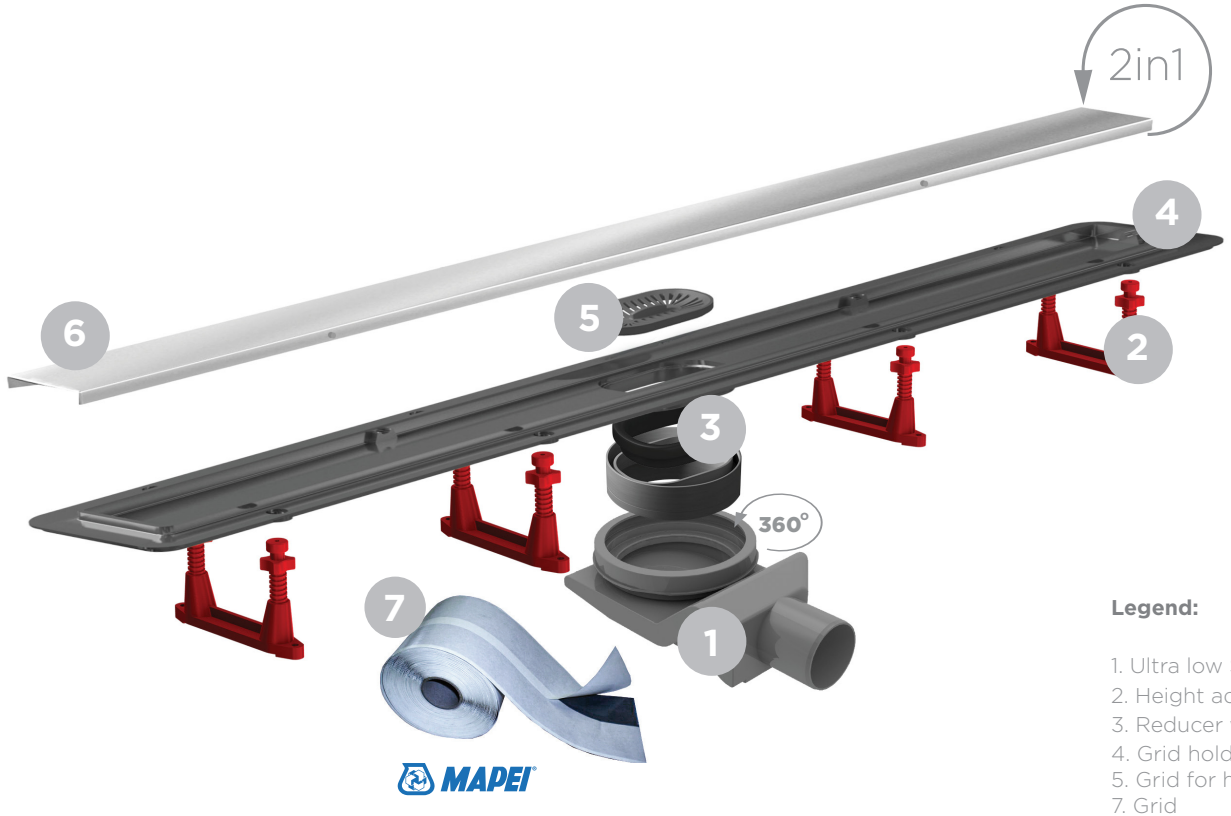

Legend:

1. Ultra low S Base
2. Height adjustment legs
3. Reducer with rubber ring
4. Grid holder
5. Grid for hair
7. Grid
8. Mapei waterproofing butyl tape

52 mm
Min. installation height

48l/min
Maximum flow rate

2 in 1 system
2 in 1 system

SC
Self-cleaning base

K3
Load class of grid


∅ 50 output
Base diameter outlet

360° base rotation
Base rotation

25 mm
Water seal height

AISI 304
Material of grid

PRIMO

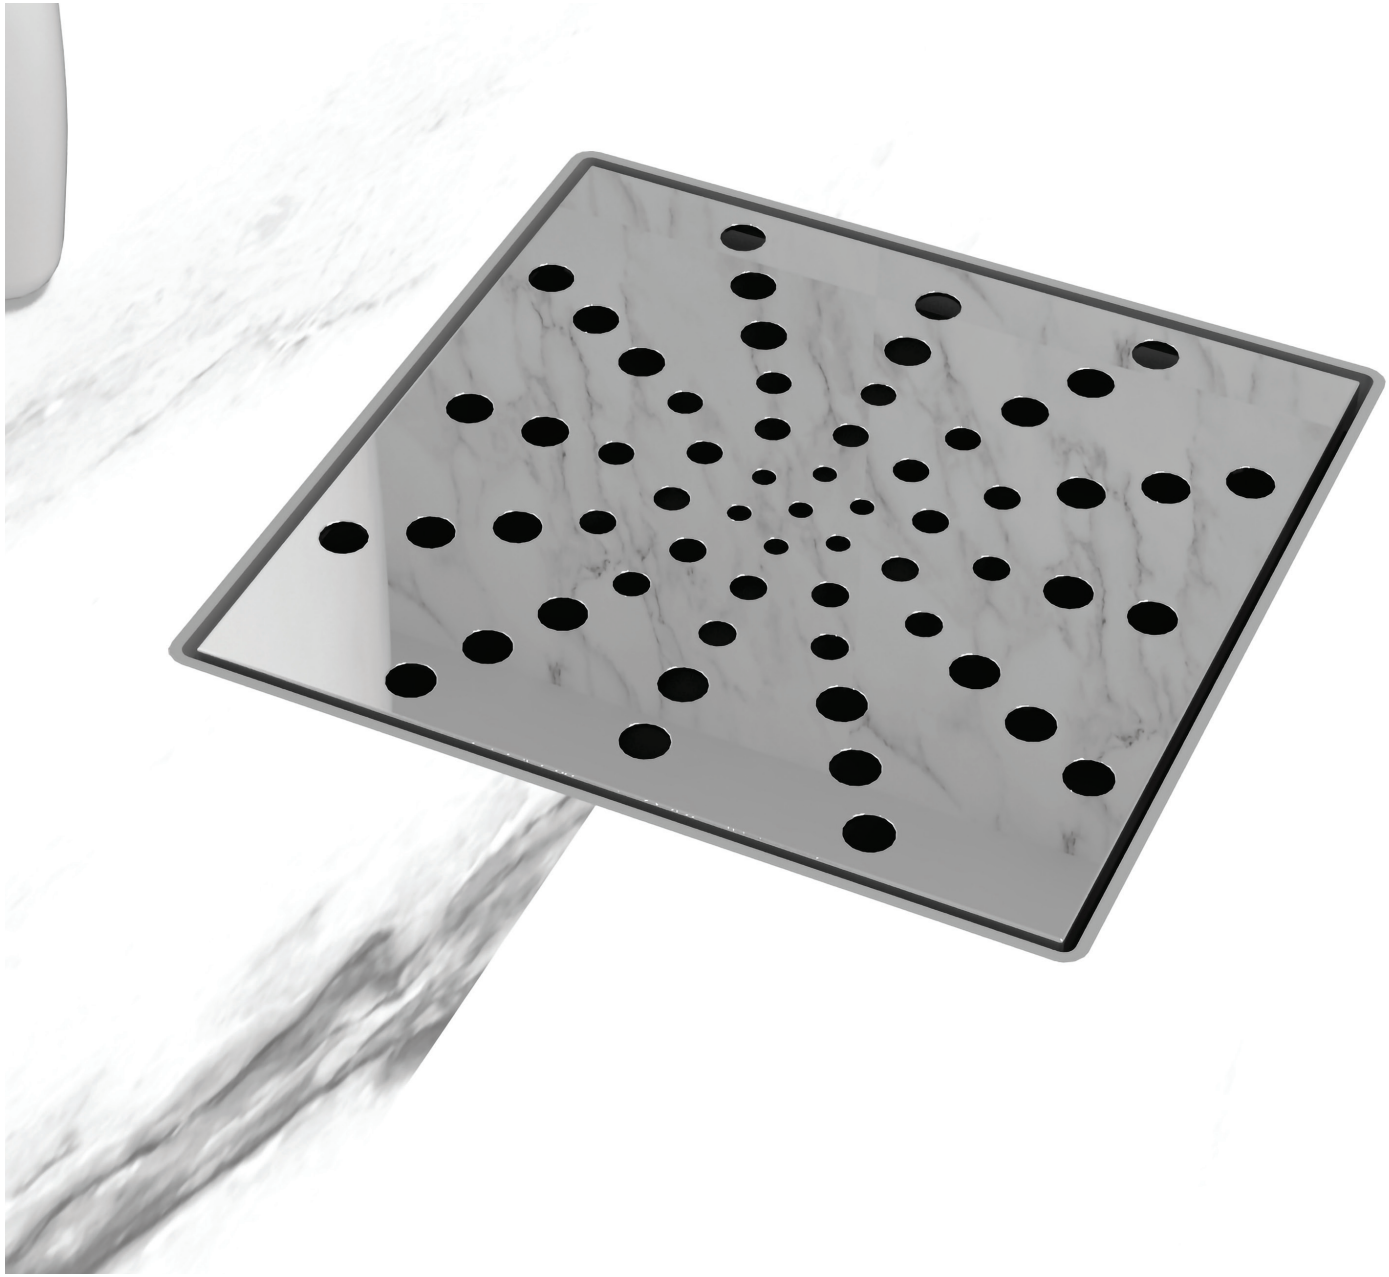

Primo Square stainless steel grid drain is manufactured in 150x150 mm grid size with 4 different types of outlet and polished stainless steel grid made from AISI 304. Primo Square plastic grid drain is manufactured in 150x150mm and 200x200 mm grid size with 5 different types of outlet and grid made from polypropylene.

Primo **Square** drains

Main advantages:


- Minimum installation height — 47-82 mm
- High flow rate
- Cost effective
- Easy to install product

Grid finish



Primo Uno

Primo Square Metal

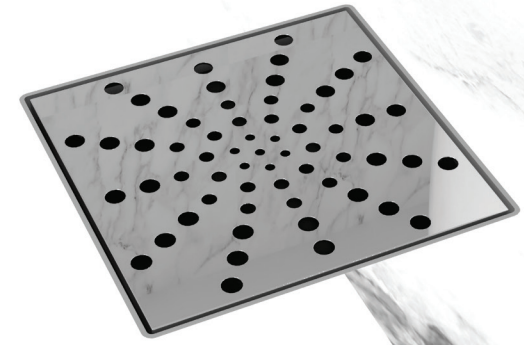

Primo Square Plastic




Primo Round Plastic




Primo
Square drains

Models for bathroom 15x15 grid




Primo Uno Vertical

ø50 output | ø75 output




Primo Uno Horizontal

ø50 output | ø75 output



Primo Square Metal Vertical


ø50 output | ø75 output



Primo Square Metal Horizontal


ø50 output | ø75 output

Models for garage 20x20 and 25x25 grid



Primo Square Plastic Vertical

ø50 output | ø75 output



Primo Square Plastic Horizontal

ø50 output | ø75 output



Primo Round Plastic Vertical

ø110 output

Confluo
POS Displays



Confluo
Big Display




Confluo
Combo Display



Confluo Single
Display **Premium**



Confluo Single
Display **Frameless**

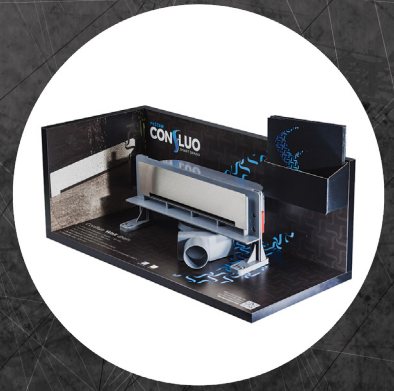

Confluo Single
Display **Wall**



Confluo Single
Display **Compact**



Confluo Single
Display **Slim**

Confluo
Webshop Packages

Listening to the needs of our associates, online shop owners, we have created webshop packages with the complete content needed to implement the Confluo range in any online store.

Webshop packages include:

- Photos of installed drains,
- Photographs and rendering of products and all drain elements,
- Text descriptions,
- Technical drawings and technical specifications for all products in the assortment.



Scan QR code for more info and download Confluo webshop packages.

ADAPTERS

1. 

USA 2" vertical adapter for American plumbing p-trap systems made of ABS and PVC.

2. 

MENA DN 90, 75, 63, 50, 40 mm vertical adapter made of PP for plumbing systems with siphon in dropped ceiling.

3. 

MENA DN 50 MM VERTICAL ADAPTER

4. 

Mena DN 100 mm adapter

5. 

Horizontal S base 5 cm water seal as per EN 1253

6. 


PVC DN 50 mm to 2" REDUCER.
Reducer between DIN and BS piping systems.

7. 

5 cm water seal adapter as per EN 1253

Compatibility of adapters with Confluo models:

	Confluo Premium Line	Confluo Compact Premium	Confluo Frameless Line	Confluo Slim Line	Confluo Wall Drain	Confluo Standard	Confluo Compact Primo
1. 	√	√	√	√	√		√
2. 	√	√	√	√	√	√	√
3. 	√	√	√	√	√		√
4. 	√	√	√	√	√		√
5. 	√	√	√	√	√		√
6. 	√	√	√	√	√	√	√
7. 	√	√	√			√	√

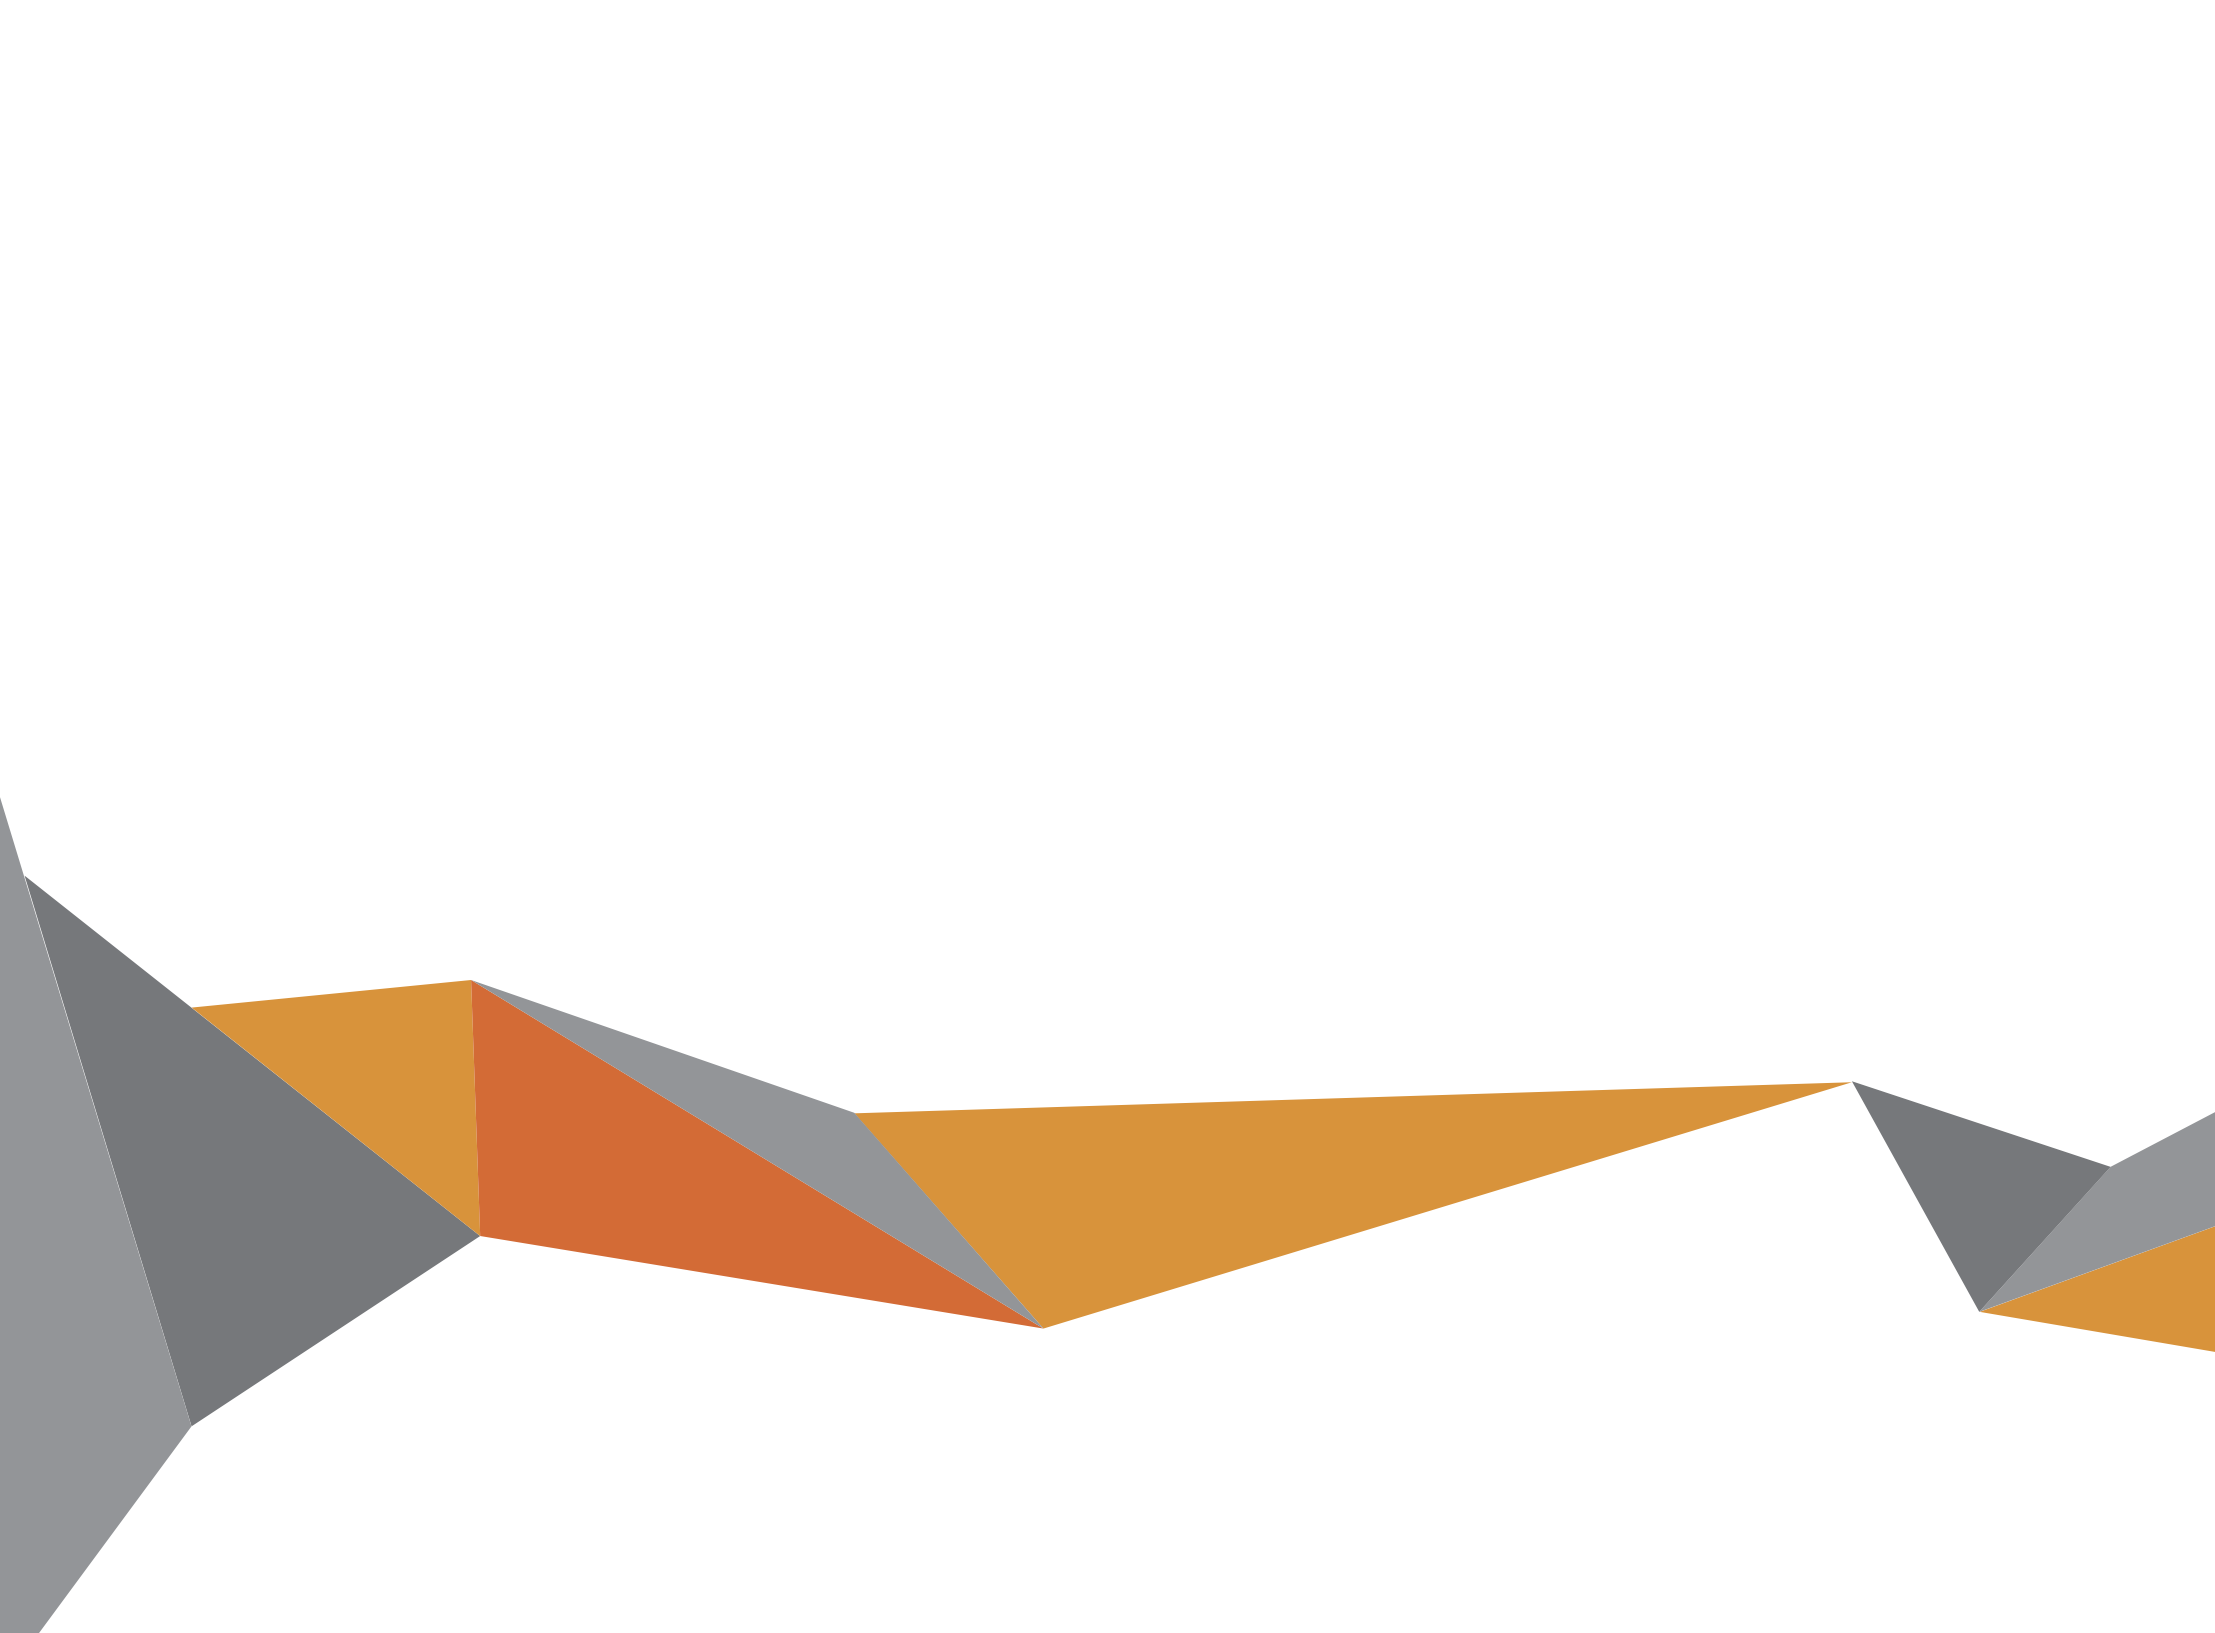

Fluenta





Fluenta concealed flushing cisterns are a perfect choice for furnishing bathrooms and sanitary facilities. An economical and noiseless flushing cisterns will ensure outstanding performance. A rich offer of flushing plates is aesthetically customized to match with the environment according to your wishes.

Fluenta
Concealed Flushing Cistern

Main advantages:

- Powder-coated metal construction, square profile 40 x 40 mm with pre-assembled concealed flushing cistern
- Frontal - dual flushing (3-6 l default, 4,5-9 l optional)
- Adjustable flushing volume (maximum quantity of water 6-9 l, a minimum quantity of water 3-4,5 l)
- Pre-assembled wall brackets and adjustable support legs (0–200 mm)
- Water connection possibility in two positions
- Fully insulated against condensation
- Silent mechanical filling valve (noise emission class 1 ISO 3822)
- Depth adjustable drain elbow (+/- 10 mm)



In touch
with elegance and modern
technology

Tehnical information

Installation method
- Installation in prefabricated walls, pre-wall installation in dry walls, universal installation into solid walls
- Corner installation

The product contains
- Concealed flushing cistern with a pre-mounted angle valve
- Water connection 1/2“
- PE wall drain elbow Ø90/110 mm with a seal
- All parts required for mounting and fixing of the product

Packaging
- Pallet: 24 pcs

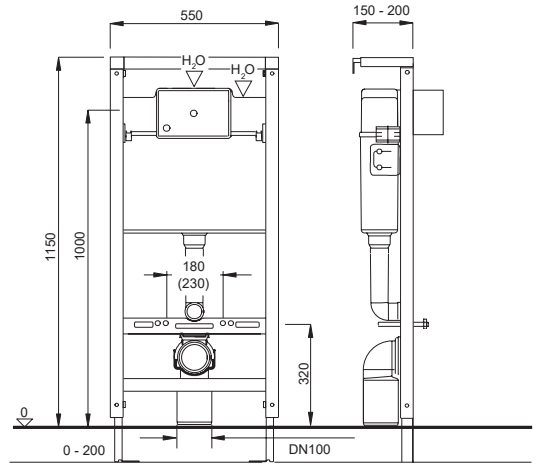



GUARANTEE 10 YEAR
10 year guarantee

SPARE PARTS 25 YEAR
25 year guarantee on spare parts

400 kg
400 kg load capacity

Low noise

Easy to maintain

Dual flush

200.000
Tested 200.000 times


Fluenta

Fluenta
Flushing Plates

Play



White

Active



White




Shine Chrome



Shine Chrome

Onyx

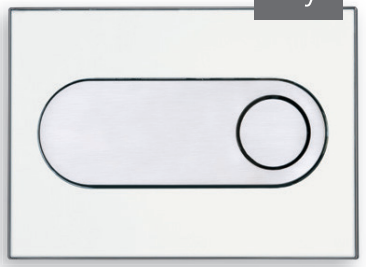

White

Diamond



White



Brushed Chrome



Brushed Chrome



Black



Black



Fluenta FIT is a concealed flushing cistern with a depth of only 80 mm. Due to the dimensions, it is suitable for fitting in the limited space, whether it is equiping new bathroom or renovating the old one. Fluenta FIT has a strong metal construction (complete frame), and a silent hydraulic valve with a recognized NF certificate is for the rinsing. With great quality-price ratio, it is afordableand it fits into a limited budget, and elegant lines of flushing plates it fits perfectly in the modern designed bathroom.



Fluenta Fit
Concealed Flushing Cistern

Main advantages:

- Installation depth 80 mm;
- Supporting frame tested according NF Standards (XP D12-208), tested at 400 kg, cataphoresis application against corrosion, 200 hours of resistance to salt spray, with adjustable feet;
- Dual flush volume adjustable; small quantity: 2,5 - 4/big quantity: 3 - 6 L;
- Styrofoam insulation aganist condensation;
- Silent hydraulic fill valve - Class II, EN 14124;
- Each cistern is tested individually in the works;
- Pre-assembled discharge elbow Ø90 mm with reducer Ø110 mm or Ø100 mm;
- Clip-on collar to simplify the attachment of the pipe to the frame;
- İnculding connecting sleeves for pan inlet and outlet with protective caps, built-in protection box for mortar, fixing materials.



80 mm
INSTALLATION
DEPTH

Tehnical information

Installation method
- Installation in prefabricated walls, pre-wall installation in dry walls, universal installation into solid walls.

The product contains:
- Concealed flushing cistern with a pre-mounted angle valve;
- Water connection 1/2“;
- PE wall drain elbow Ø90/110 mm with a seal;
- All parts required for mounting and fixing of the product.

Packaging:
- Pallet: 24 pcs

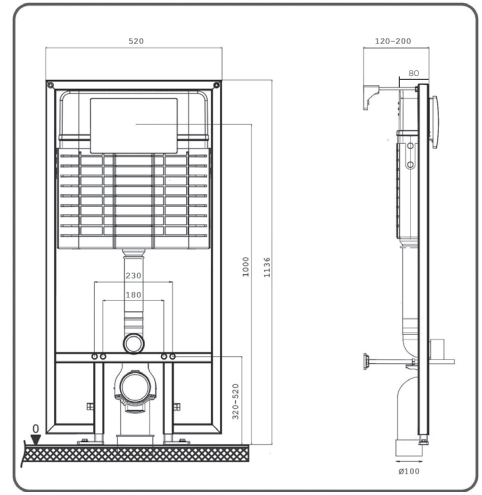



GUARANTEE 5 YEAR
5 year guarantee

400 kg
400 kg load capacity

80 mm
80 mm ultra thin

Low noise


Ø 90/110
Outlet

2,5/4 L
3/5 L
Dual flush


Fluenta

Fluenta Fit
Flushing Plates

Block

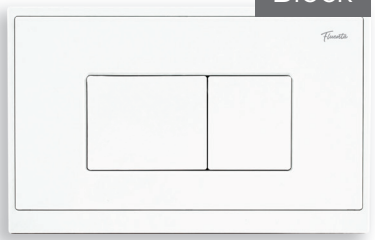


White

Block




Black

Block

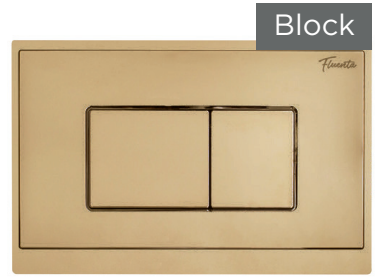


Coper

Block

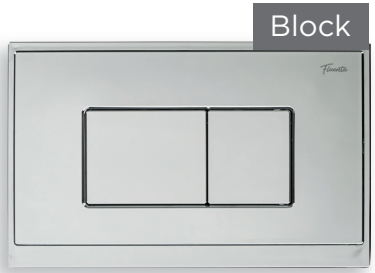

Shine Chrome

Block

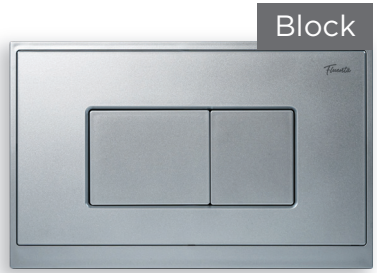

Brushed Chrome

Ring



White

Ring



Shine Chrome

Ring



Brushed Chrome

Ring




Black



Fluenta
Bidet concealed element

Installation method:

- Installation in both solid and drywalls
- Concealed element height: 115 cm
- Concealed element width: 50 cm
- For installation of wall-hung bidet with an axial distance of 18 or 23 cm
- Supporting frame made from 40 × 40 mm profiles, surface protected with powder coating
- Support legs – ranging from 0 to 24 cm
- Range of brackets for pre-wall installation: from 12 to 20 cm

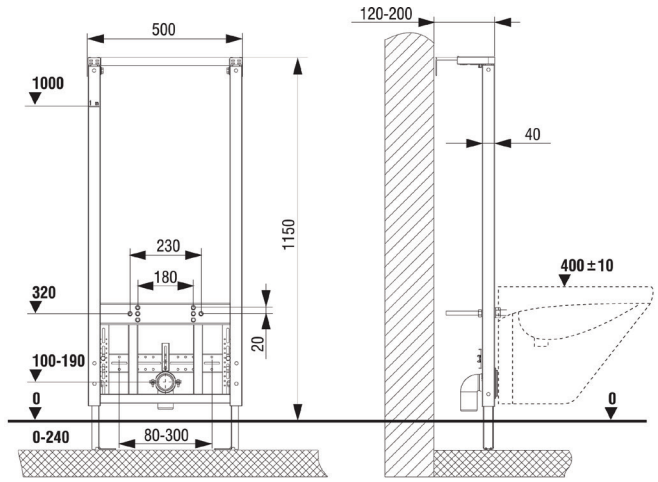





Fluenta Rimless Wall Hung Toilet Bowl with elegant and modern design without visible mounting parts ideally fits into your modern bathroom. Fluenta Rimless is a Wall Hung Toilet Bowl that ideally fits with our Fluenta concealed flushing cistern. Innovative rimless flushing technology completely disables retention of bacteria and impurities below the inner edge. With modern and elegant design, Fluenta toilet seat have “soft-close” mechanism for slowing down the seat, which prevents accidental drops of seat, shocks or injuries.

Fluenta **Rimless** Wall Hung Toilet Bowl

Main advantages:

- Ultra-thin duroplast soft close toilet seat is included;
- Rimless flushing technology completely disables retention of bacteria and impurities below the inner edge;
- Mounting set for easy installation is included;
- No visible syphon and mounting parts.

Dimensions: L 555 mm, W 370 mm, H 354 mm



„Soft close” toilet seat
made from Duroplast.

Fluenta
Rimless Wall Hung Toilet Bowl

Elegance


Elegant design with modern shape and reduced lines, without visible mounting parts, will fit ideally into your modern bathroom

Easy maintenance and cleaning

Innovative rimless toilet bowl flushing technology completely disables retention of bacteria and impurities below inner edges.

Ultra slim “soft close” toilet seat

With modern and elegant design, Fluenta toilet seat have “soft close” mechanism, which prevents fast closing, noise, impacts or injuries.

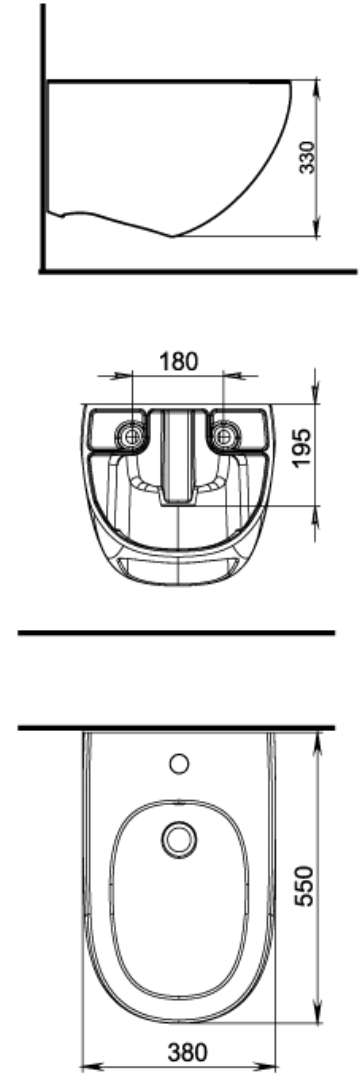



Fluenta **Basic**
Wall Hung Toilet Bowl

Fluenta Basic console toilet bowl perfectly fits with its simple design to the Fluenta concealed flushing cisterns and together they make an elegant and functional solution. It is made of a material with exceptional strength, resistant to damage, and easy to clean. Fluenta Basic toilet bowl is available with Classic or Click toilet seat. The Classic toilet seat has a soft-close mechanism for the slow lowering of the hoop and toilet seat without user intervention. The Click toilet seat has a soft-close mechanism for slow lowering and a button that allows easy removal of the toilet seat when you need to clean it.


Both these variants are made of the same material and have exceptional performance in terms of quality, design, and aesthetics. These products are delivered with all elements for quick and easy installation.





BASIC WC TOILET BOWL WITH CLASSIC TOILET SEAT



BASIC WC TOILET BOWL WITH CLICK TOILET SEAT

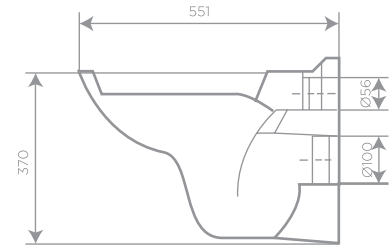

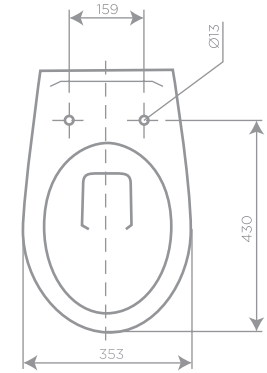





Designed to meet high criteria in terms of functionality and aesthetics.

Quality finishing with pleasant lines of minimalistic design makes Fluenta surface-mounted washbasin a part of perfect harmony with other Fluenta elements for your modern bathroom which exudes elegance.

Fluenta **Surface-mounted** Washbasin

Main advantages:


- Scratch resistance surface
- Glossy finish
- Slim design
- No-Spill function




Fluenta


Fluenta **Round** Washbasin

Dimensions: L 615 mm, W 360 mm, H 115 mm

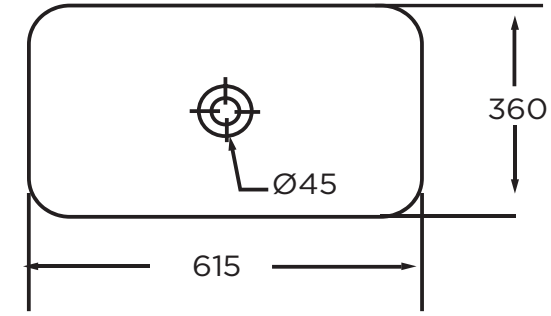

Fluenta **Round mini** Washbasin

Dimensions: L 500 mm, W 360 mm, H 115 mm

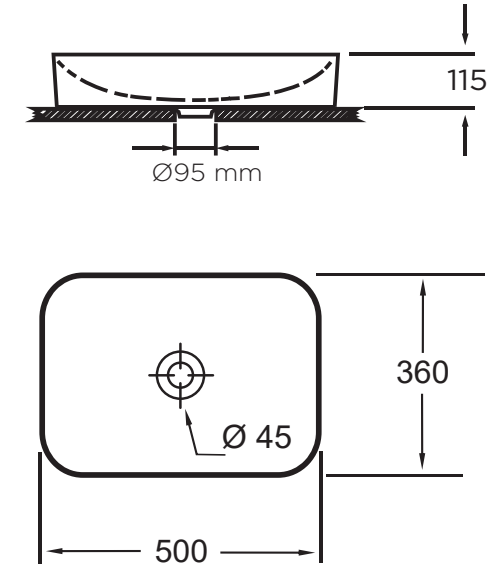


The Fluenta Spot sink is an unmistakable choice for smaller bathrooms, affordable and easy to fit, and will complete the space according to your taste. With an elegant and modern design, natural lines made of the finest porcelain, it fits perfectly with other Fluenta products. A spot sink with an interesting shape can be a special detail even in a simply decorated space.



Fluenta **Spot** Washbasin

Dimensions: Ø380 mm, H 115 mm



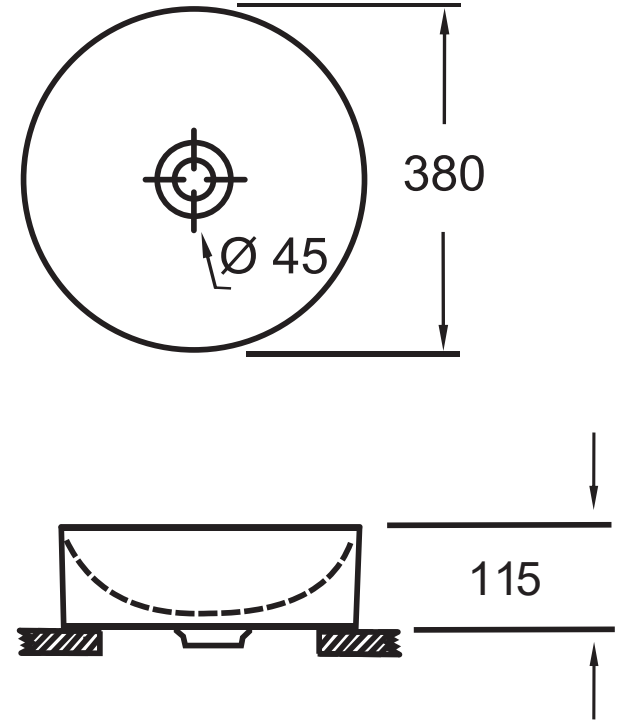

CONTENT

03	WE ARE
07	BATHROOM SOLUTIONS
09	CONFLUO
10	ICONS
11	CONFLUO MODELS
13	ULTRA LOW S BASE
15	CONFLUO PREMIUM LINE
23	CONFLUO COMPACT LINE PREMIUM
31	ANTI-LEAKING SYSTEM
33	CONFLUO FRAMELESS LINE
43	CONFLUO SLIM LINE
47	WALL DRAIN
53	CONFLUO BOARD
59	CONFLUO STANDARD
63	CONFLUO STANDARD WITH METAL GRID
65	CONFLUO STANDARD GLASS
67	CONFLUO STANDARD CERAMIC
69	CONFLUO STANDARD PLATE 2 IN 1
71	CONFLUO STANDARD ANGLE
73	CONFLUO PRIMO LINE MODELS BENEFITS
75	CONFLUO COMPACT LINE PRIMO
77	CONFLUO COMPACT LINE BLACK MATTE PRIMO
79	CONFLUO PRIMO LINE
81	PRIMO SQUARE DRAINS
84	POS DISPLAYS
85	WEBSHOP
87	ADAPTERS
89	FLUENTA
91	FLUENTA CONCEALED FLUSHING CISTERN
95	FLUENTA FLUSHING PLATES
97	FLUENTA FIT CONCEALED FLUSHING CISTERN
101	FLUENTA FIT FLUSHING PLATES
103	FLUENTA BIDET CONCEALED ELEMENT
105	FLUENTA RIMLESS WALL HUNG TOILET BOWL
109	FLUENTA BASIC WALL HUNG TOILET BOWL
111	FLUENTA SURFACE-MOUNTED WASHBASIN

BRAND MANIFESTO

We are not oriented just to production, we combine reliability with quality for the ultimate benefit of our clients.

We do not build short-term client relationships, but long-term and genuine partnerships.

Everything we do, we do with one thing in mind - to create ideas to perfectly match all our client needs and the best way for us to achieve this goal is to constantly educate our clients provide solutions that meet their specific needs and support them throughout the entire process.

Because our success is as big as your trust in us.

PEŠTAN

we build trust

+381 034 700 300
OFFICE@PESTAN.NET

PUT 1300 KAPLARA 188
ARANDJELOVAC
34300 SERBIA

WWW.PESTAN.NET